




## Universal Frequency-to-Digital Converter & Universal Sensors and Transducers Interface ICs

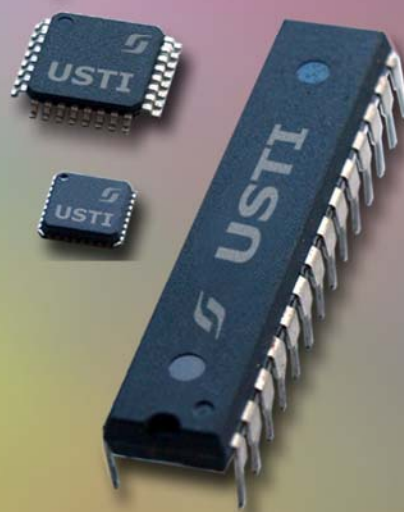

## Product Overview and Price List

UFDC-1   UFDC-1M-16   USTI   USTI-EXT   USTI-MOB   EVAL UFDC-1/1M-16



## **IFSA Group's companies**

The IFSA Group's companies are continuing design and production of integrated circuits and sensor systems solutions based on precision measurements of frequency-time parameters of signals.

One of company's main objectives is to promote a new generation of cost effective digital and smart sensor integration technologies and to establish own digital measuring technology as an alternative to common analog solutions.

## **Technologies**

Our technology eases the integration of digital sensors and sensor systems in all kind of devices and markets: from Wearable devices to IoT, Smartphones to Aerospace, Healthcare or Automobile and for Consumer and Professional applications. We manufacture and sell Integrated Circuits, Development Boards and IPs based on patented methods of measurements for frequency-time parameters of signals.

The technology offers a unique opportunity to develop various digital sensors, smart sensors, multi-sensor systems and robust, sensor systems with high metrological performances and wide functionalities including intelligent functions as self-adaptation and self-identification. It is a basis for a new approach to digital sensors and smart sensor systems design and integration.

The key to product range is ultra-precise measurement technology in terms of universal frequency-to-digital converter (UFDC). In this field, the company's experts developed its core technology that meets an extremely high degree of precision, broad frequency range, scalable resolution and non-redundant conversion time.

Our products simplify ADC, digital sensors and sensor systems designs and boost their performance, while reducing costs and time-to-market.


## **Products and services**

- ICs: Universal Frequency-to-Digital Converters (UFDC-1 and UFDC-1M-16), Universal Sensors and Transducers Interfaces (USTI, USTI-EXT and USTI-MOB)
- Development boards: EVAL UFDC-1 and UFDC-1M-16
- IPs on a royalty basis (licenses)
- IC Custom Design services
- Sensor Systems Design based on our own IC products
- Calibration Services for our ICs.

## Product Overview

Comparative Table of ICs .....	3
Universal Frequency-to-Digital Converter (UFDC-1) .....	4
Universal Frequency-to-Digital Converter (UFDC-1M-16) .....	8
Evaluation Board EVAL-UFDC-1/1M-16.....	9
Universal Sensors and Transducers Interface (USTI) .....	11
Universal Sensors and Transducers Interface (USTI-EXT) .....	15
Universal Sensors and Transducers Interface (UST-MOB) .....	16
Frequency-to-Digital Converter with Parallel Interface (FDCP) * .....	17
ICs Comparison.....	18
Custom Designed ICs .....	18
Price List.....	19
Contact .....	20

\* Coming soon

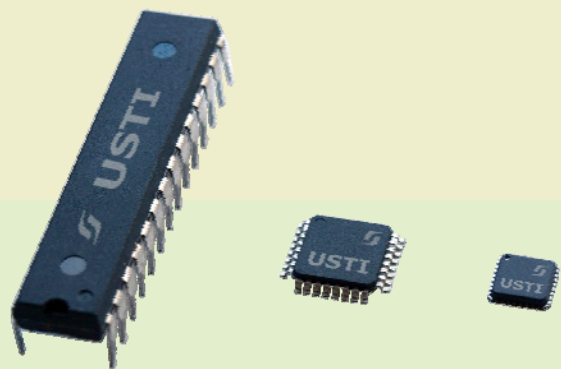

## Comparative Parameters of ICs

Parameter \ IC	UFDC-1	UFDC-1M-16	USTI	USTI-EXT	USTI-MOB
Number of measuring modes	16	16	29	29	29
Frequency measuring range, $f_x$	0.05 Hz ... 7.5 MHz	1 Hz ... 7.5 MHz	0.05 Hz ... 9 MHz	1 Hz ... 7.5 MHz	0.25 Hz ... 1.95 MHz
Max. frequency with prescaling, MHz	120	120	144	120	30
Programmable accuracy (relative error), %	1 ... 0.001	1 ... 0.001	1 ... 0.0005	1 ... 0.0005	1 ... 0.0009
Conversion time, s	0.0002 ... 0.2	0.00000625 ... 0.00625	0.00016 to 0.32	0.00000625 ... 0.0125	0.00064 to 0.7
Frequency generator mode, MHz	8	8	10	8	2
External clock frequency, MHz	16	16	20	16	4
External clock frequency, MHz	0.5	16	0.625	16	4
Period measuring range, $T_x$	150 ns ... 20 s	150 ns ... 20 s	110 ns ... 20 s	150 ns ... 20 s	513 ns ... 4 s
Max. frequency at phase shift measurement $\varphi_{x1}$ , kHz	500	500	625	500	4
Time interval between Start – and Stop-pulse, $t_x$	2 $\mu$ s ... 250 s	2 $\mu$ s ... 250 s	1.5 $\mu$ s ... 250 s	2 $\mu$ s ... 250 s	7 $\mu$ s ... 1000 s
$f_{max}$ at duty-cycle and duty-off factor measurements, kHz	500	500	625	500	100
Duty-off factor measuring range, $Q$	$10^{-8}$ ... $8 \times 10^6$	$10^{-8}$ ... $8 \times 10^6$	$10^{-8}$ ... $8 \times 10^6$	$10^{-8}$ ... $8 \times 10^6$	$130 \cdot 10^{-9}$ ... $6 \cdot 10^5$
Frequency difference, $f_{x1} - f_{x2}$ with sign recognition	0 ... 7.5 MHz	0 ... 7.5 MHz	0 ... 9 MHz	0 ... 7.5 MHz	0 ... 1.95 MHz
Period difference, $T_{x1} - T_{x2}$ with sign recognition,	0 ... 20 s	0 ... 20 s	0 ... 20 s	0 ... 20 s	0 ... 4 s
Frequency ratio, $f_{x1}/f_{x2}$	$7 \times 10^{-9}$ ... $1.4 \times 10^8$	$7 \times 10^{-9}$ ... $1.4 \times 10^8$	$5.5 \times 10^{-9}$ ... $1.8 \times 10^8$	$7 \times 10^{-9}$ ... $1.4 \times 10^8$	$128 \times 10^{-9}$ ... $7.8 \times 10^6$
Period ratio, $T_{x1}/T_{x2}$	$7.5 \times 10^{-9}$ ... $1.33 \times 10^8$	$7.5 \times 10^{-9}$ ... $1.33 \times 10^8$	$4.0 \times 10^{-9}$ ... $2 \times 10^8$	$7.5 \times 10^{-9}$ ... $1.33 \times 10^8$	$128 \times 10^{-9}$ ... $7.8 \times 10^6$
Pulse width, $t_p$	2 $\mu$ s ... 250 s	2 $\mu$ s ... 250 s	1.5 $\mu$ s ... 250 s	2 $\mu$ s ... 250 s	7 $\mu$ s ... 1000 s
Space interval, $t_s$	2 $\mu$ s ... 250 s	2 $\mu$ s ... 250 s	1.5 $\mu$ s ... 250 s	2 $\mu$ s ... 250 s	7 $\mu$ s ... 1000 s
Pulse number (events) counting, $N_x$	0 ... $4 \times 10^9$	0 ... $4 \times 10^9$	0 ... $4 \times 10^9$	0 ... $4 \times 10^9$	0 ... $4 \times 10^9$
RS232 data transfer rate, bps	300, 600, 1 200, 2 400, 4 800, 9 600, 19 200 and 38 400	300, 600, 1 200, 2 400, 4 800, 9 600, 19 200 and 38 400	300, 600, 1 200, 2 400, 4 800, 9 600, 14 400, 19 200, 28 800 and 38 400	300, 600, 1 200, 2 400, 4 800, 9 600, 14 400, 19 200, 28 800 and 76 800	300, 600, 1 200, 2 400, 4 800, 9 600, 14 400, 19 200, 38 400 and 76 800
I <sup>2</sup> C serial clock frequency, kHz	100	100	100	100	20
SPI serial clock frequency, kHz	500	500	500	500	28
Active current consumption, mA	17.5	17.5	9.5	12	0.85
Voltage supply, V	+4.5 ... +5.5	+4.5 ... +5.5	+4.5 ... +5.5	+4.5 ... +5.5	+1.8
Operation temperature range	-40 °C ... +85 °C	-40 °C ... +85 °C	-40 °C ... +85 °C	-55 °C ... +150 °C	-40 °C ... +85 °C
Rotation speed measurement mode, $n_x$	•	•	•	•	•
Package: 28-lead PDIP	•	•	•	-	•
32-lead TQFP (7×7 mm)	•	•	•	•	•
32-pad MLF (5×5 mm)	•	•	•	•	•
Resistive bridges measurement mode, $B_x$	-	-	•	•	•
Frequency deviation absolute $D_A$ , MHz	-	-	0 ... 9	0 ... 7.5	0 ... 4
Frequency deviation relative $D_R$ , %	-	-	0 ... 100	0 ... 100	0 ... 100
Resistance measuring range, $R_x$	-	-	10 $\Omega$ ... 10 M $\Omega$	12 $\Omega$ ... 10 M $\Omega$	20 $\Omega$ ... 4 M $\Omega$
Relative error at resistance measurement, $\Delta R_x$ , %	-	-	±0.47 (average)	±0.6 (average)	±0.04 ... ±1.54
Capacitance measuring range, $C_x$	-	-	50 pF ... 100 $\mu$ F	60 pF ... 100 $\mu$ F	50 pF ... 0.1 $\mu$ F
Relative error at capacitance measurement, $\Delta C_x$ , %	-	-	±0.036 (average)	±0.045 (average)	±0.3 ... ±1

# Universal Frequency-to-Digital Converter (UFDC-1)

## General Description

The Universal Frequency-to-Digital Converter (UFDC-1) is a fully digital CMOS integrated circuit based on novel patented methods for frequency, period, its ratio, duty-cycle and phase-shift measurements. By using this IC it is possible to build a wide variety of digital, smart sensors and intelligent sensor systems. The device represents a high-resolution conversion for data acquisition systems designed to support all range of frequency-time domain and digital sensor applications. It offers high performance with flexibility and requires minimum possible number of external components.

The UFDC-1 can be easily included into digital environment, controlled by an external microcontroller (slave mode) or work independently as a separate measuring unit without an external control (master mode). The function selection can be configured in both software and hardware.

The IC converts frequency-time parameters of signals into digital with high resolution and programmable accuracy during the non-redundant conversion time, and provides simple interface to microcontroller, DAQ or sensor system to read these digital results.

The UFDC-1 has 16 measuring and one generating modes. The measuring mode can be hardware-selected by using four selection external pins M0-M2 and the relative error by using four selection pins N0-N2 (RS232 master communication mode). The mode and accuracy can be also selected by using any of three possible interfaces (slave communication mode). A com-


munication interface type (RS232, SPI or I2C) can be automatically selected according to the circuit connection.

The UFDC-1 can also work with any voltage and current output sensors. In this case, any voltage-to-frequency converter (VFC) can be used. The accuracy of such system will be determined by sensor accuracy as well as by VFC accuracy.

## Features

- 16 measuring modes and one generator mode
- 2 channels for frequency and period measurements
- Provides frequency (time)-to-digital conversion for many types of sensors and transducers
- Frequency range from 0.05 Hz up to 7.5 MHz without prescaling and 120 MHz with prescaling;
- Programmable accuracy (relative error) for frequency (period) conversion from 1 % to 0.001 %
- Relative quantization error is constant in all specified frequency range
- Non-redundant conversion time
- Scalable resolution
- Internal reference clock 500 kHz @ 16 MHz quartz oscillator
- Quartz-accurate automated calibration
- 3-wire serial interface (SPI compatible)
- 2-wire interface (I<sup>2</sup>C compatible)
- RS232/485 serial interface
- Master and slave communication modes
- Frequency generator mode 8 MHz with quartz crystal stability

## Block Diagram

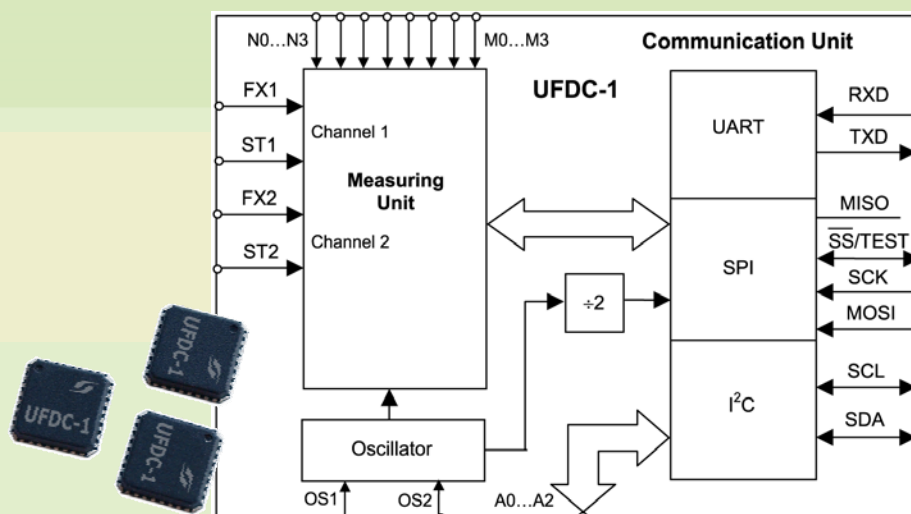

## Measuring Modes

- Frequency,  $f_{x1}$  0.05 Hz – 7.5 MHz directly and up to 120 MHz with prescaling
- Period,  $T_{x1}$  150 ns – 20 s
- Phase shift,  $\varphi_x$  0 – 360° at  $f_{x\max} = 500$  kHz at 50 % duty-cycle
- Time interval between start – and stop-pulse,  $\tau_x$  2  $\mu$ s – 250 s
- Duty-cycle, D.C. 0 – 1 at  $f_{x\max} \leq 500$  kHz
- Duty-off factor,  $Q$   $10^{-8}$  –  $8 \cdot 10^6$  at  $f_{x\max} \leq 500$  kHz
- Frequency difference,  $f_{x1} - f_{x2}$  with sign recognition, 0 – 7.5 MHz
- Period difference,  $T_{x1} - T_{x2}$  with sign recognition, 0 – 20 s
- Frequency ratio,  $f_{x1}/f_{x2}$   $7 \times 10^{-9}$  –  $1.4 \times 10^8$
- Period ratio,  $T_{x1}/T_{x2}$   $7.5 \times 10^{-9}$  –  $1.33 \times 10^8$
- Rotation speed,  $n_x = (f_x \times 60)/Z$ , where  $Z$  is the number of encoder teeth
- Pulse width,  $t_p$  2  $\mu$ s – 250 s
- Space interval,  $t_s$  2  $\mu$ s – 250 s


- Pulse number (events) counting,  $N_x$  0 –  $4 \times 10^9$


## General

- Single power supply, V: 4.5 – 5.5
- External reference frequency, MHz: 16
- Internal reference frequency, kHz: 500
- Conversion time, s: 0.0002 to 0.2
- Supply current (at 16 MHz, 4.5 V, 25°C), mA: 17.5
- Operating temperature range -40°C to +85°C
- Storage temperature range -65°C to +150°C
- Packages: 28-lead PDIP; 32-lead TQFP, 32-pad MFL


The UFDC-1 is available as IP for the use in various microelectronic design. This device can be supplied also in wafer form.

## Packages

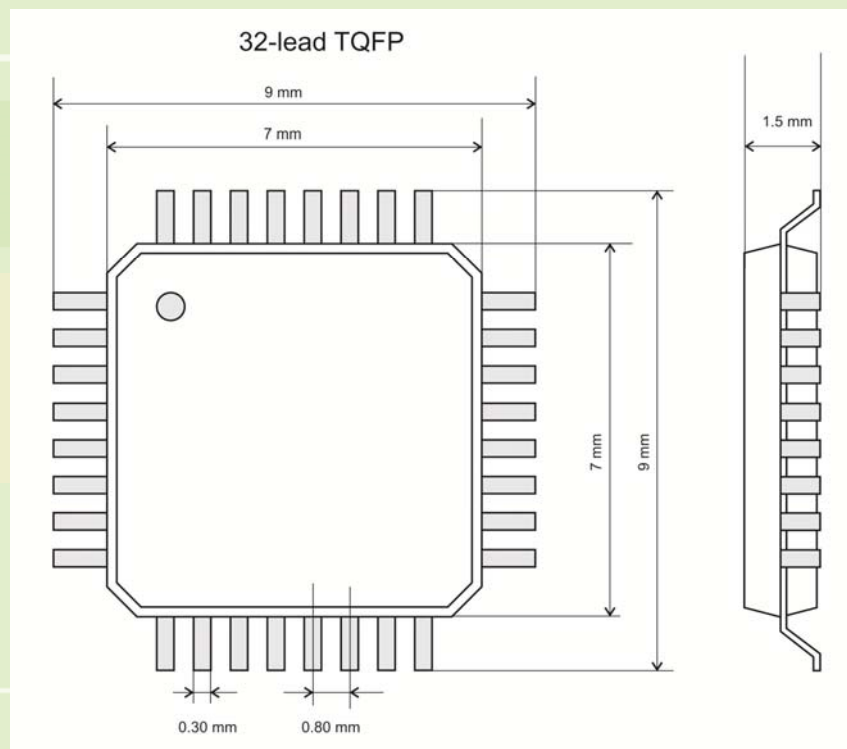

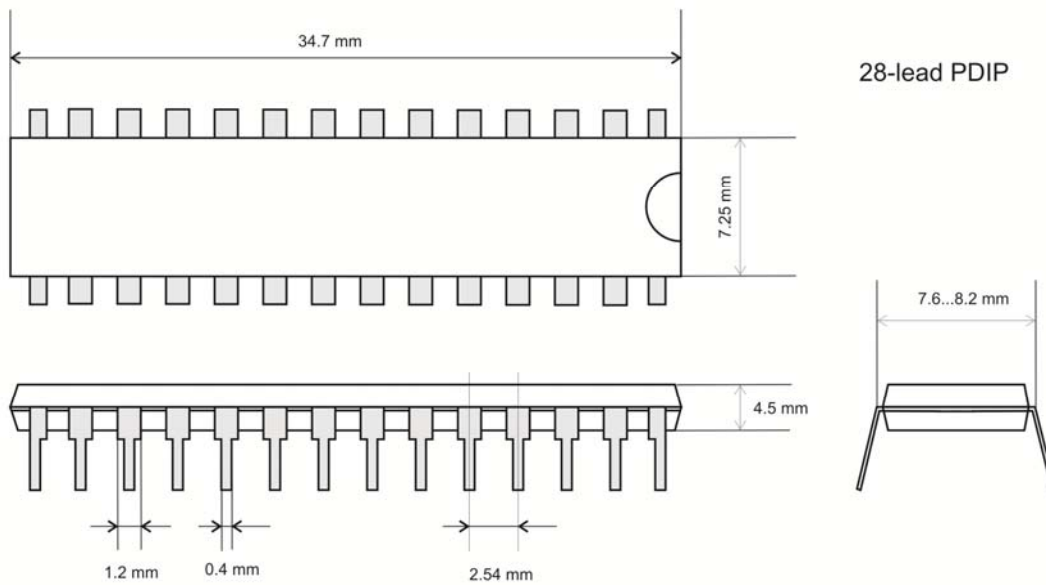

### 32-pad MLF

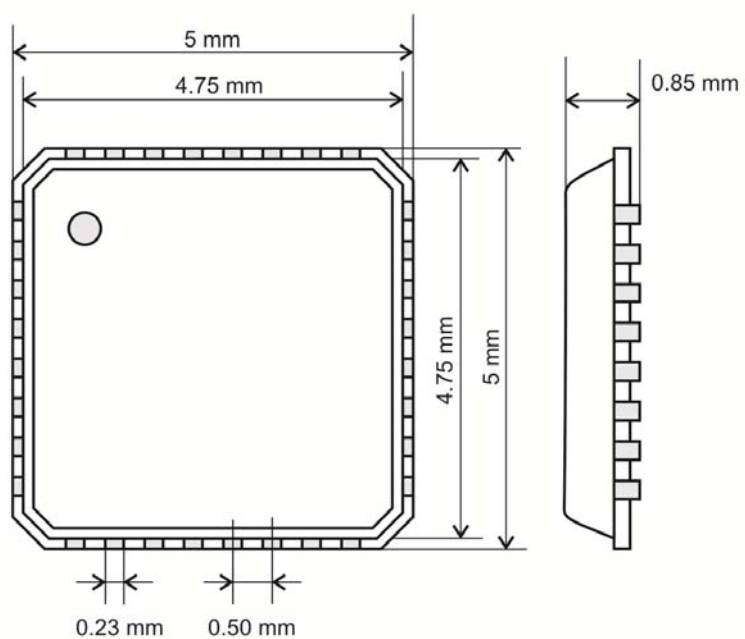

## Communication Modes


The UFDC-1 can work as an independent measuring unit (master mode), controlled by any external microcontroller (or embedded into a sensor), DAQ board or PC (slave mode). In the master mode, the conversion accuracy and measurement mode should be selected by external switches. In this mode the UFDC-1 works only through the RS232 interface in a unidirectional mode. In the slave mode (with an external microcontroller), all measuring modes and programmed accuracy can be set up by a data bus or through communication I/O ports of master microcontroller. This allows us use the UFDC-1 as a simple peripheral circuit for a microcontroller.

A bidirectional data exchange is possible with any of three interfaces RS232, SPI or I2C. The UFDC-1 works as a standard element in different systems with I2C bus architecture, or can be controlled through the RS232 or SPI interfaces. The choice of interface can be performed automatically depend on the circuit connections.

## Applications

The UFDC-1 has many applications. Some typical applications are following:

- Any physical, chemical or biosensor systems
- Any frequency, period, duty-cycle, time interval, phase-shift, pulse number output sensors in order to produce a digital output
- Digital sensors design
- Smart (self-adaptive) sensors due to programmable accuracy and non-redundant conversion time - adaptive possibilities of UFDC-1 automatically choice the conversion time depending on the given error of measurement and opposite
- Multifunctional and multiparameters sensors for simultaneous detection various parameters proportional to frequency and duty-cycle carrying the information provided by sensing elements.
- Data acquisition (DAQ) boards and systems for frequency-time parameters
- Virtual instruments
- Desktop multifunctional frequency counters
- Tachometers and tachometric systems
- Handheld multimeters for frequency-time parameters of electric signals
- High-end, mid- and low-range ABS
- High accuracy programmable frequency-time parameters – to – digital converters for different measuring and communication applications

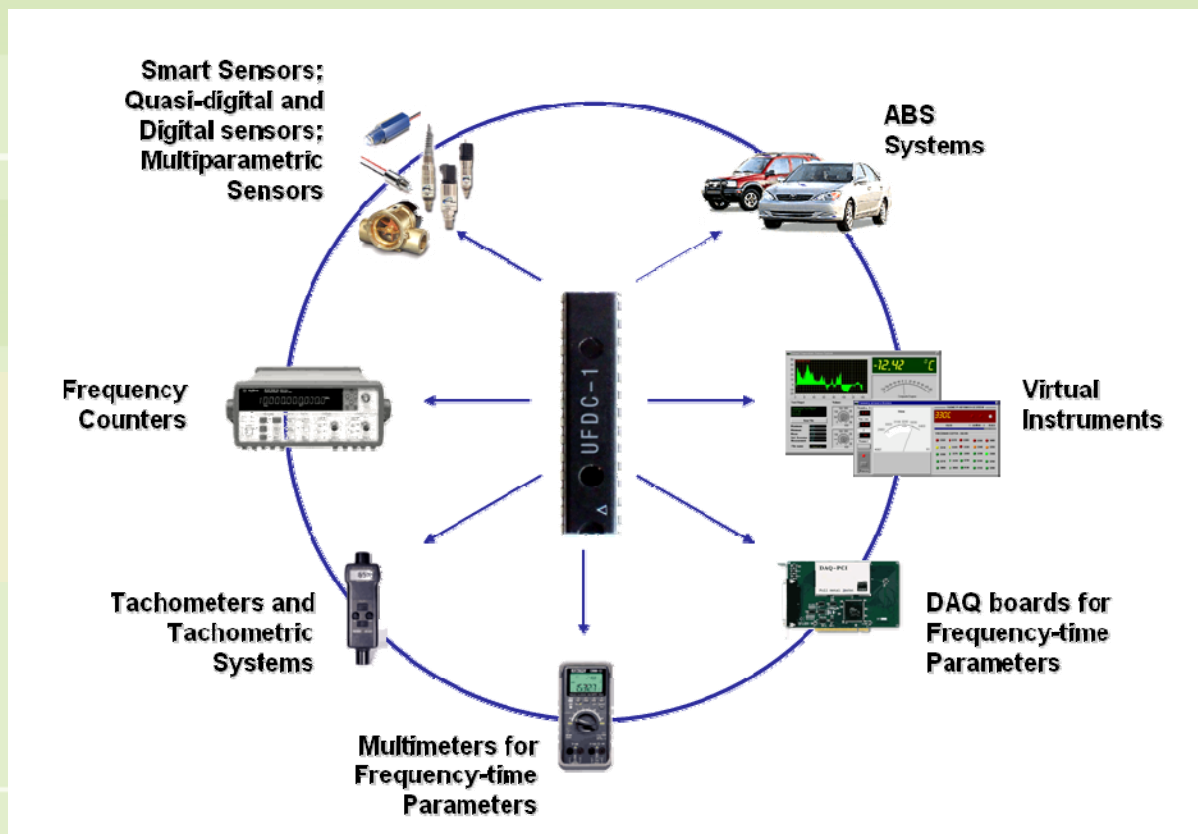



# Universal Frequency-to-Digital Converter (UFDC-1M-16)

## General Description

The UFDC-1M-16 is a high speed version of UFDC-1 IC with 16 MHz internal and external reference frequencies and conversion time from 0.00000625 ... 0.00625 s for 1 % to 0.001 % constant relative error respectively. The UFDC-1M-16 has the same functionality, pin out, housing, set of commands, measuring and communication modes as the UFDC-1 IC.

## Features

- 16 measuring modes and one generator mode
- 2 channels for frequency and period measurements
- Provides frequency (time)-to-digital conversion for many types of sensors and transducers
- Frequency range from 1 Hz up to 7.5 MHz without prescaling and 120 MHz with prescaling;
- Programmable accuracy (relative error) for frequency (period) conversion from 1 % to 0.001%
- Relative quantization error is constant in all specified frequency range
- Non-redundant conversion time
- Scalable resolution
- Internal reference clock 16 MHz @ 16 MHz quartz oscillator
- Quartz-accurate automated calibration
- 3-wire serial interface (SPI compatible)
- 2-wire interface (I2C compatible)

RS232/485 serial interface

Master and slave communication modes

Frequency generator mode 8 MHz with quartz crystal stability


## Measuring Modes

- Frequency,  $f_{x1}$  1 Hz – 7.5 MHz directly and up to 120 MHz with prescaling
- Period,  $T_{x1}$  150 ns – 20 s
- Phase shift,  $\phi_x$  0 – 360° at  $f_{xmax} = 500$  kHz at 50 % duty-cycle
- Time interval between start – and stop-pulse,  $t_x$  2  $\mu$ s – 250 s
- Duty-cycle, D.C. 0 – 1 at  $f_{xmax} \leq 500$  kHz
- Duty-off factor,  $Q$   $10^{-8}$  –  $8 \cdot 10^6$  at  $f_{xmax} \leq 500$  kHz
- Frequency difference,  $f_{x1} - f_{x2}$  with sign recognition, 0 – 7.5 MHz
- Period difference,  $T_{x1} - T_{x2}$  with sign recognition, 0 – 20 s
- Frequency ratio,  $f_{x1}/f_{x2}$   $7 \times 10^{-9}$  –  $1.4 \times 10^8$
- Period ratio,  $T_{x1}/T_{x2}$   $7.5 \times 10^{-9}$  –  $1.33 \times 10^8$
- Rotation speed,  $n_x = (f_x \cdot 60)/Z$ , where  $Z$  is the number of encoder teeth
- Pulse width,  $t_p$  2  $\mu$ s – 250 s
- Space interval,  $t_s$  2  $\mu$ s – 250 s
- Pulse number (events) counting,  $N_x$  0 –  $4 \cdot 10^9$

The UFDC-1M-16 is available as IP for the use in various microelectronic design. This device can be supplied also in wafer form.

## Main Differences Between UFDC-1M-16 and UFDC-1 ICs

	UFDC-1	UFDC-1M-16
Internal reference frequency, MHz	0.5	16
Frequency measuring range	0.05 Hz ... 7.5 (120) MHz	1 Hz ... 7.5 (120) MHz
Conversion time, s	0.0002 ... 0.2	0.00000625 ... 0.00625



## Evaluation Board EVAL-UFDC-1/1M-16

## General Description


The EVAL-UFDC-1/UFDC-1M-16 is a simple full featured evaluation and development board (universal counter module) that allows users to quickly evaluate the performance of the Universal Frequency-to-Digital Converters UFDC-1 and UFDC-1M-16 without the need for external components and design various DAQ systems on its basis. This 2-channel Evaluation Board lets use such ICs in 16 frequency-time parameters measuring modes, one generation (for a calibration purpose) mode and build various digital sensors and sensor systems including smart, self-adaptation and self-identification sensor systems.

All existing frequency, period, duty-cycle, time interval, pulse-width modulated, pulse number and phase-shift output sensors and transducers can be directly interfaced to this evaluation board. The user can connect TTL-compatible sensors' outputs to the Evaluation Board, measure any output frequency-time parameters, and test out the sensor systems functions.

Using the accompanying software, the EVAL-UFDC-1/UFDC-1M-16 evaluation board can be interfaced to any personal computer running Windows XP/Vista/Windows 7, via one of the serial computer's com port RS232 or USB port (with an additional USB to Serial (9-pin) DB9 RS232 adapter cable, for example, EMINENT USB to Serial Converter).

Four holes are provided for mechanical attachment of the Evaluation Board to users' applications.

The RS232 interfacing chip MAX232CSE offers a serial communication between the UFDC-1/UFDC-1M-16 and, for instance, a personal computer or external (master) microcontroller. A 16 MHz crystal completes the on-chip oscillator of the UFDC-1/1M-16. The board is working from 8 to 14 V AC/DC external power supply. The LM7805CT voltage regulator provides the +5 V, DC supply voltages for the integrated circuit.

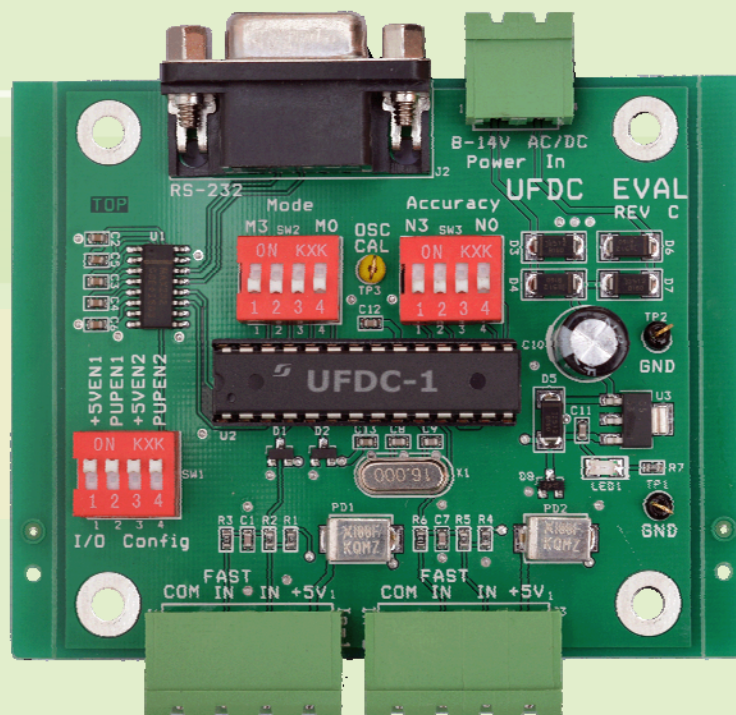


## Software

The software allows the EVAL-UFDC-1/UFDC-1M-16 Evaluation and Development board's functions to be controlled from a PC via an easy-to-use interface operating under Windows XP/Vista/Windows 10. There are many ways to display evaluated results, such as the terminal programs for Windows, LabView and special software supplied with the Evaluation Board. Any terminal program for Windows, for example, Terminal V1.9b, can easily display the measurement results and accept the programming commands for measuring modes, accuracy selections, etc. via the serial port of the PC. The original UFDC EVAL Software V1.14 does not need any installation.

The software also lets to calibrate the converters and put a calibration constant into the converter's memory.

## Applications

- Digital sensor systems
- Smart and intelligent sensor systems
- Data Acquisition systems for frequency-time parameters of electric signals
- Frequency counters
- Tachometers and tachometric systems
- Various virtual instruments
- Educational process in sensors and measurements
- Remote laboratories and distance education

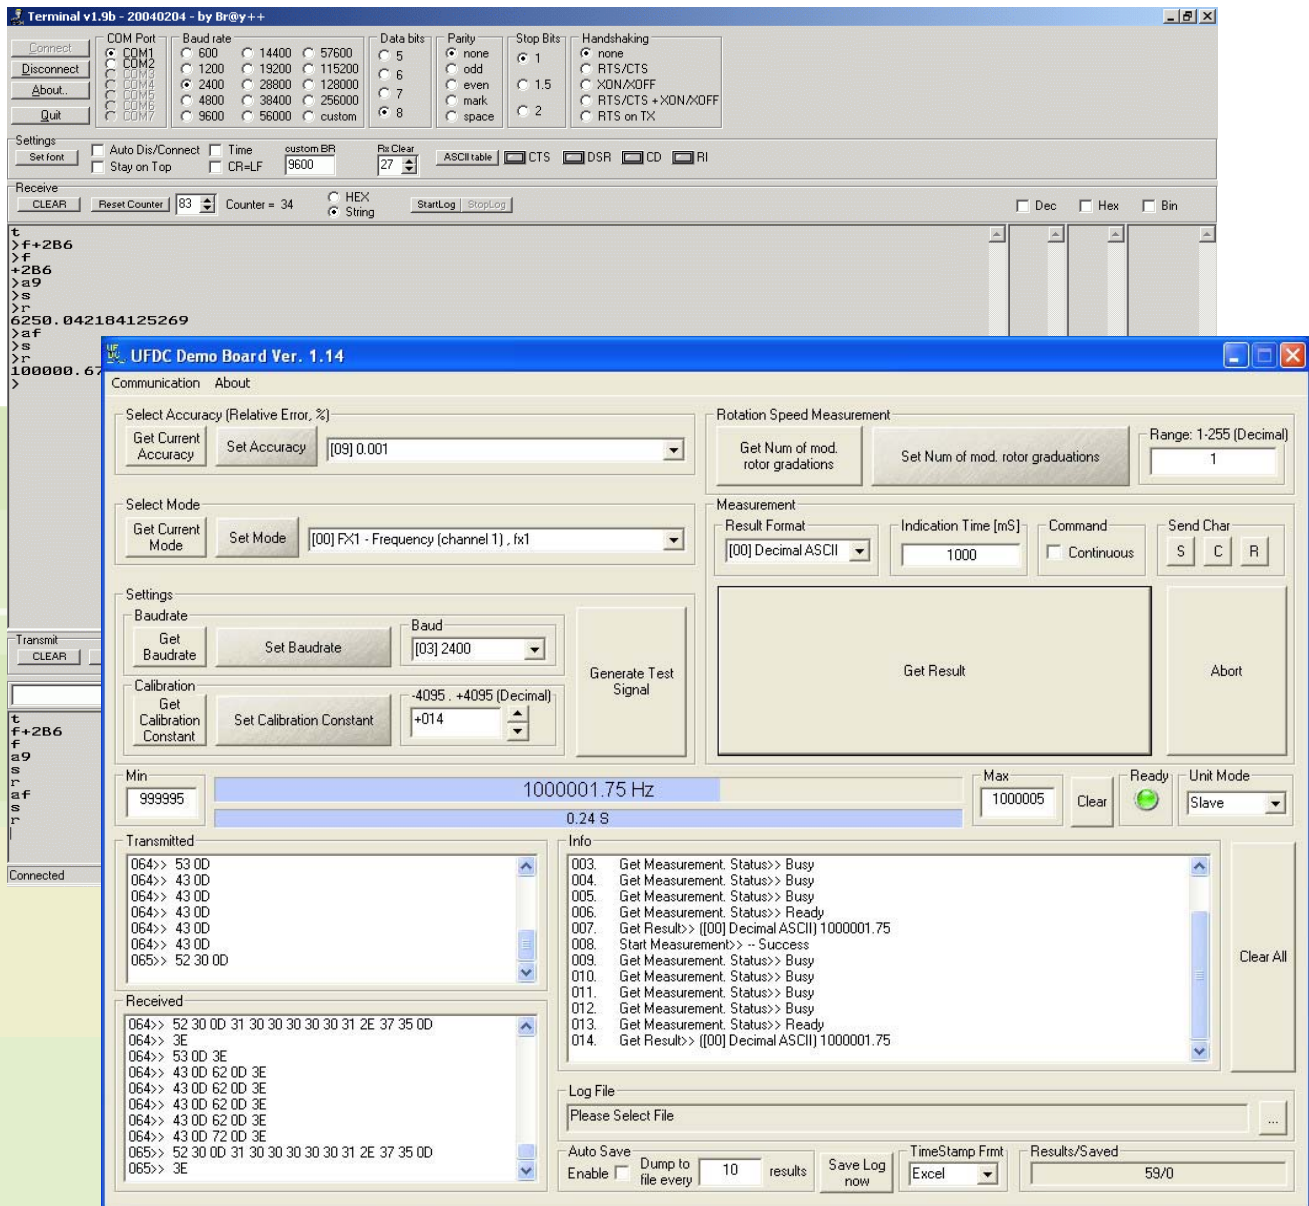

# Universal Sensors and Transducers Interface (USTI)

## General Description

The awards-winning Universal Sensors and Transducers Interface (USTI) is the next generation of F2D's ICs. Higher accuracy and wide functionalities make it ideal for various sensor and measuring applications. With special function blocks like resistance-, capacitance and resistive bridge-to time-to-digital converters it is perfectly suited for different sensors and transducers.

The USTI is a fully digital CMOS integrated circuit of universal, 2-channel, high precision, multifunctional converter based on novel, advanced methods for frequency, period, its ratio, duty-cycle and phase-shift measurements. It is perfectly suited to any applications where frequency-time parameters but also sensors output signal, have to be measured with highest resolution and programmable accuracy during the non-redundant conversion time.

The USTI covers a wide range of frequencies and accuracies for modern frequency-time domain sensors. In addition, the USTI provides interfacing for resistive (including platinum, cuprum resistors and thermistors), capacitive sensing elements and resistive bridges.

By using this IC it is possible to build a wide variety of digital, smart sensors and intelligent sensor systems. The device represents a high-resolution conversion and designed to support

all range of frequency-time domain and digital sensor applications. It offers high performances with flexibility and requires minimum possible number of external components.


The USTI can be easily included into digital environment, controlled by an external microcontroller (slave mode) or work independently as a separate measuring unit without an external control (master mode). The function selection can be configured in both software and hardware.

The IC converts frequency-time domain signals, resistance and capacitance of sensing elements and resistance of sensor bridges into digital and provides digital, bus interface to microcontroller, DAQ or sensor system to read these digital results. Sensing elements can be directly connected to the USTI without the need for extra electronics. Only a single reference element, of the same kind as the sensor, is required.

## General

- Single power supply, V: 4.5 – 5.5
- External reference frequency, MHz: 20
- Internal reference frequency, kHz: 625
- Conversion time, s: 0.00016 to 0.32
- Supply current (at 20 MHz, 4.5 V, 25°C), mA: < 9.5
- Operating temperature range -40 °C to +85 °C
- Storage temperature range -65 °C to +150 °C

## Block Diagram

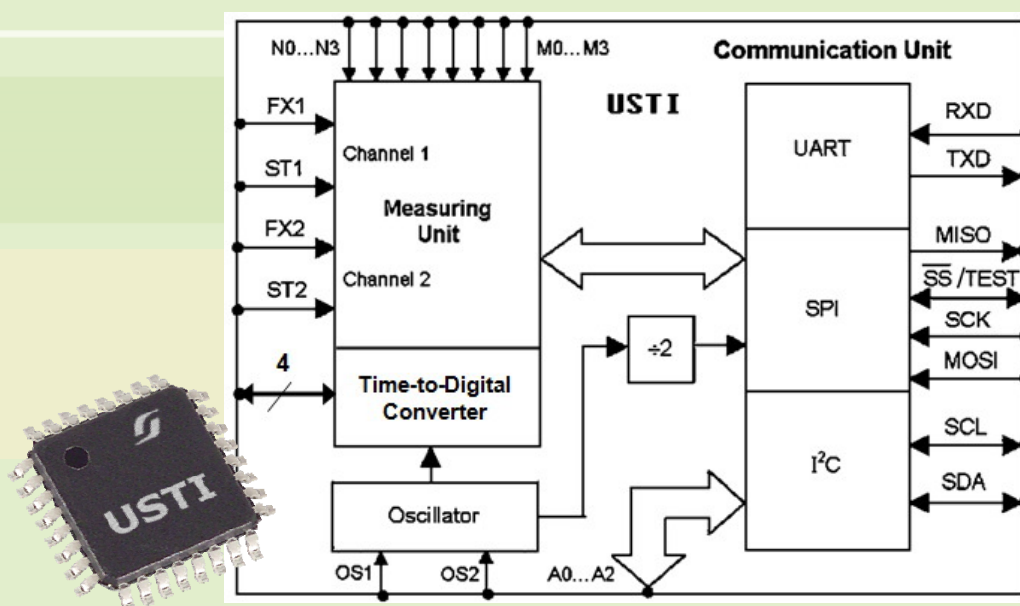



## Features

- 29 measuring modes and one generator mode
- 2 channels for all frequency-time parameters
- Provides frequency (time)-to-digital conversion for many types of sensors and transducers
- Frequency range from 0.05 Hz up to 9 MHz without prescaling and 144 MHz with prescaling;
- Programmable accuracy (relative error) for frequency (period) conversion from 1 % to 0.0005 %
- Relative quantization error is constant in all specified frequency range
- Non-redundant conversion time
- Scalable resolution
- Internal reference clock 625 kHz @ 20 MHz quartz oscillator
- Simplified and improved quartz-accurate automated calibration


## Measuring Modes

- Frequency,  $f_x$  0.05 Hz – 9 MHz directly and up to 144 MHz with prescaling
- Period,  $T_x$  110 ns – 20 s
- Phase shift,  $\varphi_x$  0 - 360° at  $f_{x\max}=625$  kHz at 50 % duty-cycle
- Time interval between start – and stop-pulse,  $\tau_x$  1.5  $\mu$ s – 250 s
- Duty-cycle, DC 0 – 1 at  $f_{x\max} \leq 625$  kHz
- Duty-off factor,  $Q_1$   $10^{-8}$  –  $8 \cdot 10^6$  at  $f_{x\max} \leq 625$  kHz

- Frequency difference,  $f_{x1} - f_{x2}$  with sign recognition, 0 – 9 MHz
- Period difference,  $T_{x1} - T_{x2}$  with sign recognition, 0 – 20 s
- Frequency ratio,  $f_{x1}/f_{x2}$   $5.5 \cdot 10^{-9}$  –  $1.8 \cdot 10^8$
- Period ratio,  $T_{x1}/T_{x2}$   $4.0 \cdot 10^{-9}$  –  $2 \cdot 10^8$
- Rotation speed,  $n_x = (f_x \cdot 60)/Z$ , where  $Z$  is the number of encoder teeth
- Pulse width,  $t_P$  1.5  $\mu$ s – 250 s
- Space interval,  $t_S$  1.5  $\mu$ s – 250 s
- Pulse number (events) counting,  $N_x$  0 –  $4 \cdot 10^9$
- Frequency deviation absolute  $DA1$ , 0-9 MHz
- Frequency deviation relative  $DR1$ , 0-100 %
- Resistance,  $R_x$  10  $\Omega$  to 10 M $\Omega$  with average relative error  $\pm 0.47$  % and  $\pm 0.01$  % error at splitting of the range into sub ranges
- Capacitance,  $C_x$  50 pF to 100  $\mu$ F with average relative error  $\pm 0.036$  % and  $\pm 0.7$  % the worst case relative error
- Resistive bridges,  $B_x$  must not include any internal components other than 4 arms forming a bridge

The USTI can also work with any voltage and current output sensors. In this case, any voltage-to-frequency converter (VFC) can be used. The accuracy of such system will be determined by sensor accuracy as well as by VFC accuracy.

The UFDC-1 is available as IP for the use in various microelectronic design. This device can be supplied also in wafer form.

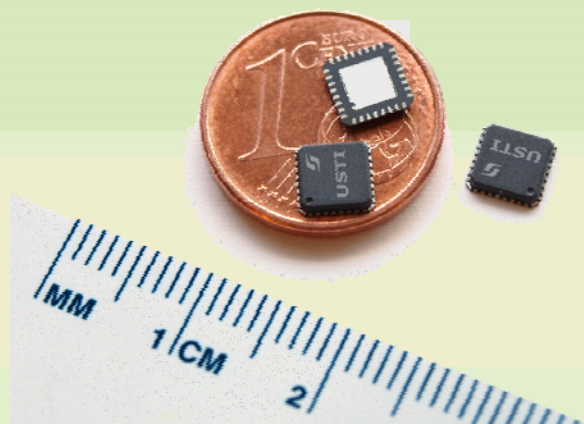

## Communication Modes

The USTI can work as an independent measuring unit (master mode), controlled by any external microcontroller (or embedded into a sensor), DAQ board or PC (slave mode). In the master mode, the conversion accuracy and measurement mode should be selected by external switches. In this mode the USTI works only through the RS232 interface in a unidirectional mode. In the slave mode (with an external microcontroller), all measuring modes and programmed accuracy can be set up by a data bus or through communication I/O ports of master microcontroller. This allows us use the USTI as a simple peripheral circuit for a microcontroller.

A bidirectional data exchange is possible with any of three interfaces RS232, SPI or I<sup>2</sup>C. The USTI works as a standard element in different systems with I<sup>2</sup>C bus architecture, or can be controlled through the RS232 or SPI interfaces. The choice of interface can be performed automatically depend on the circuit connections.


## Applications



The USTI has many applications. Some typical applications are the following:

- Sensor systems with any frequency, period, duty-cycle, time interval, phase-shift, pulse

- number output sensors and transducers;
- Physical, chemical, bio- and immunosensors; quartz crystal microbalance (QCM) based sensors, BioMEMS, Lab-on-Chip;
- Digital sensors design, SoC, SiP;
- ADCs based on intermediate voltage-to-frequency conversion;
- Smart, intelligent (self-adaptive) sensors and sensor systems due to programmable accuracy and non-redundant conversion time - adaptive possibilities of USTI automatically choice the conversion time depending on the given error of measurement and opposite;
- Multifunctional and multiparameters sensors for simultaneous detection various parameters proportional to frequency and duty-cycle carrying the information provided by sensing elements;
- Data acquisition (DAQ) boards and measuring systems for frequency-time parameters of electric signal;
- Virtual instruments;
- Desktop multifunctional frequency counters;
- Tachometers and tachometric systems;
- Handheld multimeters for frequency-time parameters of electric signals;
- High-end, mid- and low-range ABS;
- High accuracy programmable frequency-time parameters – to – digital converters for various measuring and communication applications.

## Packages

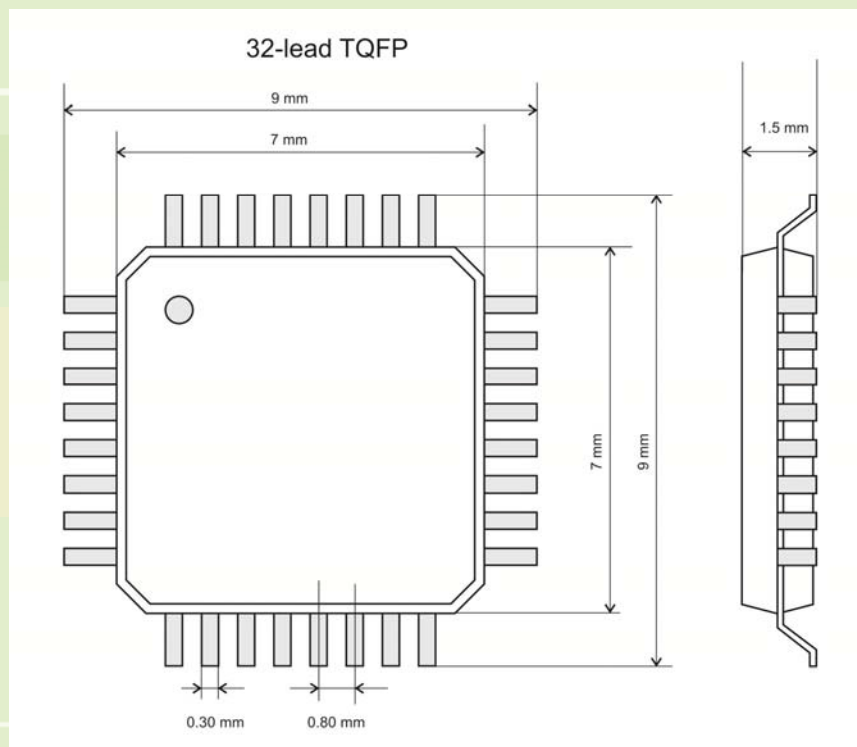

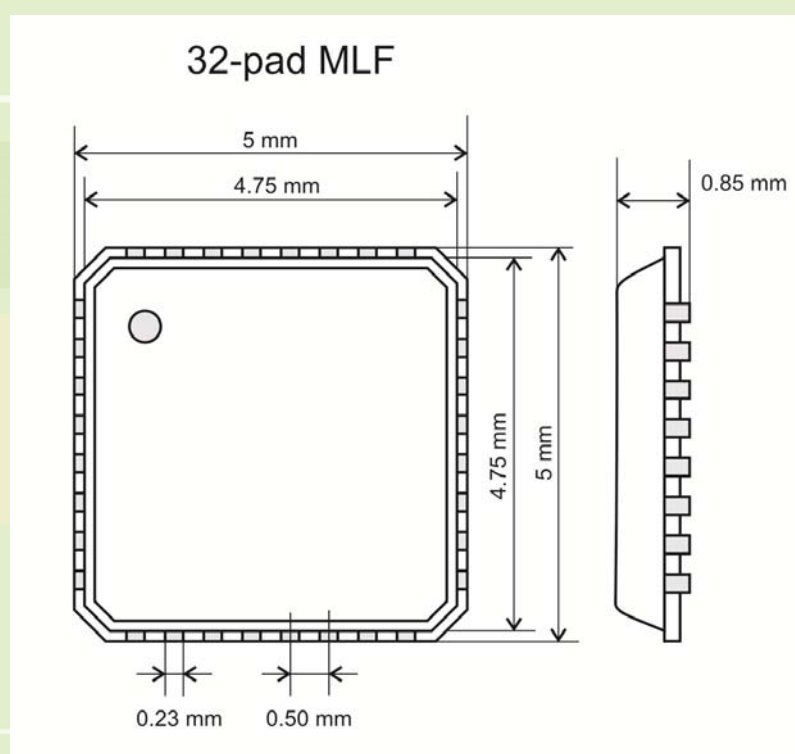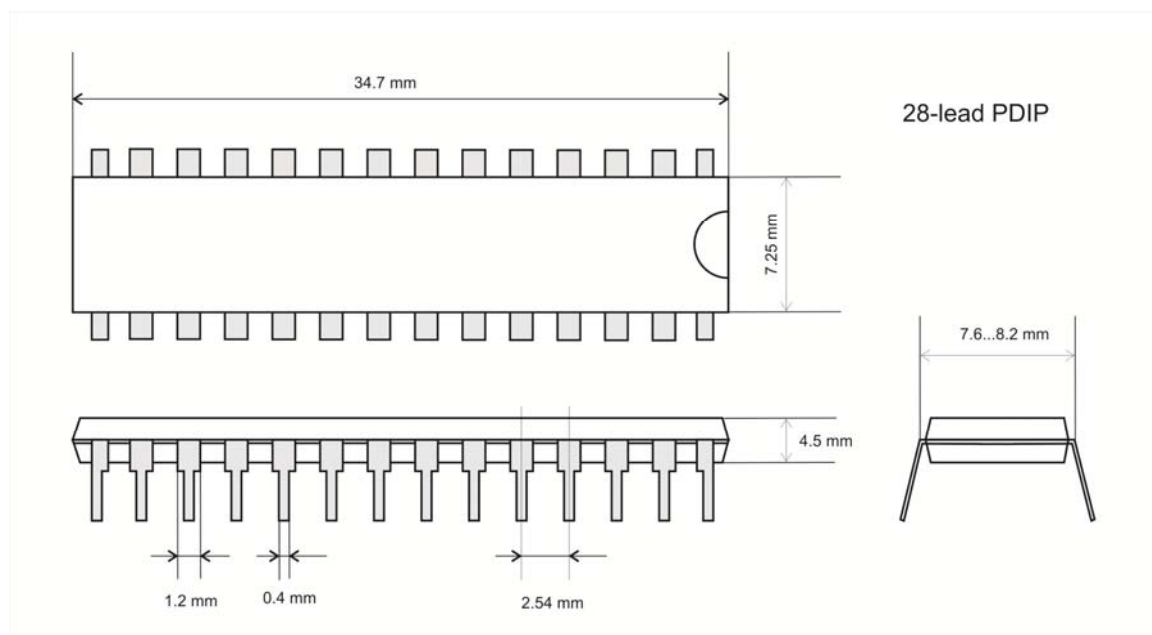

## Universal Sensors and Transducers Interface (USTI-EXT)

### General Description

The Universal Sensors and Transducers Interface (USTI-EXT) is an integrated circuit with extended temperature range. The new IC has similar metrological performance as the Excelera's integrated Universal Frequency-to-Digital Converter (UFDC-1M-16) and the same functionalities as the USTI IC but can work in extended operation temperature range from - 55 °C to +150 °C (AEC-Q100 Grade0).


In comparison with the basic USTI, the USTI-EXT has the reduced external clock frequency 16 MHz, but increased internal reference frequency from 625 kHz to 16 MHz, and as consequence, the reduced conversion speeds from 6.25  $\mu$ s to 12.5 ms for relative errors from 1 % to 0.0005 % respectively.

The IC has also increased baud rate for the RS232 serial interface: up to 76 800. Active supply current does not exceed 12 mA. The IC is available in two packages: 32-lead, 7x7 mm, Thin Profile Plastic Quad Flat Package (TQFP)

and 32-pad, 5 x 5 mm, Quad Flat No-Lead/Micro Lead Frame Package (QFN/MLF).

### Applications

The USTI-EXT IC is suitable for various applications including automotive, avionics, space and military. In all such applications, high metrological performances, reliability, robustness, high speed of measurement and operating efficiency will be achieved. This device enables designers to distribute intelligence and control functions directly into or near gearboxes, transfer cases, engine sensors actuators, turbochargers and exhaust systems. The ICs can be used for various quasi-digital (frequency, PWM, duty-cycle, etc. output) vehicle's sensors such as wheel speed sensor, vehicle speed sensor, turbine speed sensors, pressure sensors, fuel level sensors, mass air flow sensor, torque sensor, etc. In addition, the USTI-EXT IC is well suited for capacitance, resistance and resistive bridge types of sensors, which are also widely used in cars. Three different sensors can be connected directly to one IC.





## Universal Sensors and Transducers Interface (USTI-MOB)

### General Description

The Universal Sensors and Transducers Interface (USTI-MOB) is an integrated circuit with a reduced power consumption. The new IC has the same functionalities and main metrological performance (for frequency and period measurements) as the USTI IC.

In comparison with the basic USTI, the USTI-MOB has the reduced supply voltage and reduced external clock frequency 4 MHz, but increased internal reference frequency from 625 kHz to 4 MHz, and as consequence, the reduced conversion speed. In addition, the maximal possible baud rate for the RS232 interface has increased from 1/38400 to 1/76800 bps.

Active supply current does not exceed 12 mA. The IC is available in four packages: 32-lead, 7×7 mm, Thin Profile Plastic Quad Flat Package (TQFP) and 32-pad, 5 × 5 mm, Quad Flat No-

Lead/Micro Lead Frame Package (QFN/MLF) and 4 × 4 mm, QFN/MLF (coming soon).

### Applications

The USTI-MOB IC is suitable for various smartphones, tablets and IoT sensor systems. In all such applications, high metrological performances, reliability, robustness, high speed of measurement and operating efficiency will be achieved. The ICs can be used for various quasi-digital (frequency, period, PWM, duty-cycle, etc. output). In addition, the USTI-MOB IC is well suited for capacitance, resistance and resistive bridge types of sensors, which are also widely used in smartphones and tablets. Three different sensors can be connected directly to one IC.

The USTI-MOB is can be used also for various low power consumption digital sensors and sensor systems: autonomous sensor systems, sensor nodes in Wireless Sensor Networks, etc.

### Main Differences Between USTI and USTI-MOB ICs

Parameter	USTI	USTI-MOB
Internal/external reference frequency, MHz	0.625/16	4/4
Frequency measuring range	0.05 Hz ... 7.5 (120) MHz	0.25 Hz ... 2 (32) MHz
Relative error, %	0.0005	0.0009
Supply Voltage, V	5.0	1.8
Current consumption (active mode), mA	11	< 0.85

\* - coming soon



## Frequency-to-Digital Converter with Parallel Interface (FDCP)

### General Description

The Frequency-to-Digital Converter (FDCP) is a low power integrated circuit with a parallel communication interface (32-bit), compatible with standard microcontrollers and DSP microprocessors. The conversion time is non-redundant from 6.7  $\mu$ s to 1.6 ms depending on the programmable relative error. The external clock oscillator frequency is 16 MHz, and internal clock frequency is 32 MHz.

Supply voltage is 3.3 V. Current consumption less than 12 mA in active mode.

The FDCP IC is available in two packages: the 64-lead, 14 × 14 mm body size, 1.0 mm body thickness, 0.8 mm lead pitch, Thin Profile Plastic Quad Flat Package (TQFP) and 64-pad, 9 × 9 × 1.0 mm body, lead pitch 0.50 mm 7.65 mm exposed pad, Micro Lead Frame Package (MLF).


Operating temperature range - 40 to +85 °C.

### Features

- Provides frequency (period)-to-digital conversion for many types of sensors and transducers
- Frequency range from 500 Hz to 16 MHz  
Programmable accuracy (relative error) 1; 0.1; 0.01; 0.002 %
- Relative quantization error is constant in all specified frequency range
- Non-redundant conversion time
- Scalable resolution
- Quartz-accurate automated calibration

### Applications

Applications of FDCP are numerous: from digital, smart and intelligent sensors and sensor systems to real-time control systems. It provides the technologies that both reduce the cost and time of sensor application development and improve digital sensors' and systems' performances.

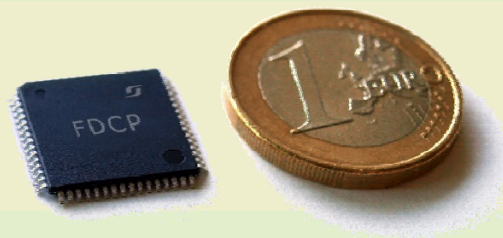

## ICs Comparison

Relative error, %	UFDC-1	UFDC-1M-16	USTI	USTI-EXT
	$t_{conv}, s$			
1	0.0002	0.00000625	0.00016	0.00000625
0.5	0.0004	0.0000125	0.00032	0.0000125
0.25	0.0008	0.000025	0.00064	0.000025
0.1	0.002	0.0000625	0.0016	0.0000625
0.05	0.004	0.000125	0.0032	0.000125
0.025	0.008	0.00025	0.0064	0.00025
0.01	0.02	0.000625	0.016	0.000625
0.005	0.04	0.00125	0.032	0.00125
0.0025	0.08	0.0025	0.064	0.0025
0.001	0.2	0.00625	0.16	0.00625
0.0005	-	-	0.32	0.0125


## Custom Designed ICs

Custom design is available. The possibility of additional functions include but not restricted to:

- Additional measuring modes (for example, measuring mode with non-redundant reference frequency for low power applications, etc.)
- Additional mathematical operations for on-chip data and signal processing

- Various interfaces including parallel interface
- Increased accuracy, reduced conversion time and expanded frequency range
- IEEE 1451 standard support

Most of necessary functions can be implemented on a single circuit and so to provide a system-on-chip and system-in-package solutions.

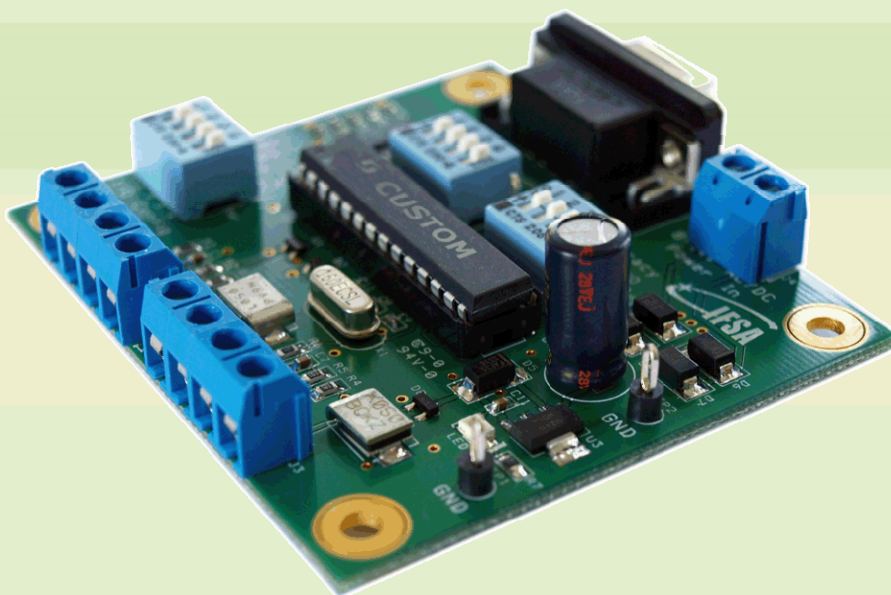


## Price List for ICs

Package			IC \ Qty	Price, EUR		
28-lead PDIP	32-lead TQFP	32-pad MLF		1-49	50-999	1000
✓	✓	✓	UFDC-1	14.95	12.95	11.95
✓	✓	✓	UFDC-1M-16	17.95	15.95	12.95
✓	✓	✓	USTI	18.95	17.95	16.95
-	✓	✓	USTI-EXT	19.95	18.95	17.95
✓	✓	✓	USTI-MOB	18.95	17.95	16.95

## Price List for Evaluation Boards EVAL UFDC-1/1M-16

Type /Price, EUR \ Qty	1-49	50-999	1000
EVAL UFDC-1	125.00	115.00	95.00
EVAL UFDC-1M-16	127.00	117.00	97.00

Distributors are welcome.

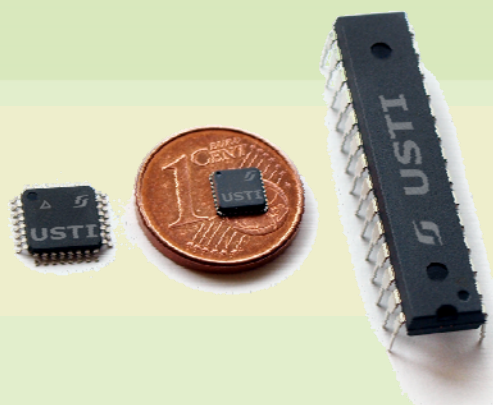

## Contacts



### Canada

Sensors Web Portal, Inc.,  
14 Lynnwood, Ave.  
Grimsby, ON, L3M 2X8, Canada  
E-mail: [info@sensorsportal.com](mailto:info@sensorsportal.com)  
Web: <http://www.sensorsportal.com>



### India

Brilliant Electr-Sys. P vt. Ltd.,  
4 Chiplunkar Bldg.,  
Tara Temple Lane,  
Lamington Road,  
Mumbai - 400 007, India  
E-mail: [besimpex@vsnl.net](mailto:besimpex@vsnl.net)  
Web: <http://www.brilliantelectronics.com>



### China & Taiwan

SHOKY ELECTRONICS  
6G05 No. 5, Sec.5, Sinjy Rd.  
11011 TAIPEI  
TAIWAN R.O.C.  
Taiwan  
E-mail: [shoky@shoky.com.tw](mailto:shoky@shoky.com.tw)



### UK & Ireland

MMS Electronics Ltd  
Unit 3, Whiteley Court  
Pool Road  
Pool in Wharfedale  
Leeds LS21 1FR  
Tel.: +44(0)1943 877 668  
Fax: +44(0)1943 870 237  
E-mail: [sales@mmselectronics.co.uk](mailto:sales@mmselectronics.co.uk)  
Web: <http://www.mmselectronics.com>



### France

C.Dis,  
Immeuble Le Versailles  
Place Lamothe-Cadillac  
82100 CASTELSARRASIN, France  
Tel.: +33 6 84 78 44 23  
E-mail: [sales@c-dis.com](mailto:sales@c-dis.com)  
Web: <http://www.c-dis.com>

## Notice

IFSA reserves the right to make changes to the products contained in this document to improve performance or for any other purpose, or to discontinue them without notice. Customers are advised to contact the company to obtain the latest product information before placing orders or designing products into systems.

The IFSA assumes no responsibility for the use of any products or circuits described in this document or customer product design, conveys no license, either expressed or implied, under any patent or other right, and makes no representation that the circuits are free of patent infringement. IFSA further makes no claim as to the suitability of its products for any particular purpose, nor does IFSA assume any liability arising out of the use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages.



**IFSA**

Parc UPC-PMT, Edif. RDIT-K2M, C/Esteve Terradas, 1  
08860, Castelldefels, Barcelona, Spain  
+(34) 696 06 77 16  
E-mail: [info@sensorsportal.com](mailto:info@sensorsportal.com)  
Web: [www.sensorsportal.com](http://www.sensorsportal.com)