

ISSN 1726-5479

SENSORS & TRANSDUCERS

3^{vol. 126}
/11



Smart Sensors and Systems

International Frequency Sensor Association Publishing



Editors-in-Chief: professor Sergey Y. Yurish, tel.: +34 696067716, fax: +34 93 4011989, e-mail: editor@sensorsportal.com

Editors for Western Europe

Meijer, Gerard C.M., Delft University of Technology, The Netherlands
Ferrari, Vittorio, Università di Brescia, Italy

Editor South America

Costa-Felix, Rodrigo, Inmetro, Brazil

Editor for Eastern Europe

Sachenko, Anatoly, Ternopil State Economic University, Ukraine

Editors for North America

Datskos, Panos G., Oak Ridge National Laboratory, USA
Fabien, J. Josse, Marquette University, USA
Katz, Evgeny, Clarkson University, USA

Editor for Asia

Ohyama, Shinji, Tokyo Institute of Technology, Japan

Editor for Asia-Pacific

Mukhopadhyay, Subhas, Massey University, New Zealand

Editorial Advisory Board

- Abdul Rahim, Ruzairi, Universiti Teknologi, Malaysia
Ahmad, Mohd Noor, Northern University of Engineering, Malaysia
Annamalai, Karthigeyan, National Institute of Advanced Industrial Science and Technology, Japan
Arcega, Francisco, University of Zaragoza, Spain
Arguel, Philippe, CNRS, France
Ahn, Jae-Pyoung, Korea Institute of Science and Technology, Korea
Arndt, Michael, Robert Bosch GmbH, Germany
Ascoli, Giorgio, George Mason University, USA
Atalay, Selcuk, Inonu University, Turkey
Atghiaee, Ahmad, University of Tehran, Iran
Augutis, Vyngantas, Kaunas University of Technology, Lithuania
Avachit, Patil Lalchand, North Maharashtra University, India
Ayesha, Aladdin, De Montfort University, UK
Azamimi, Azian binti Abdullah, Universiti Malaysia Perlis, Malaysia
Bahreyni, Behraad, University of Manitoba, Canada
Baliga, Shankar, B., General Motors Transnational, USA
Baolian, Ye, Zhengzhou University, China
Barford, Lee, Agilent Laboratories, USA
Barlingay, Ravindra, RF Arrays Systems, India
Basu, Sukumar, Jadavpur University, India
Beck, Stephen, University of Sheffield, UK
Ben Bouzid, Sihem, Institut National de Recherche Scientifique, Tunisia
Benachiba, Chellali, Universitaire de Bechar, Algeria
Binnie, T. David, Napier University, UK
Bischoff, Gerlinde, Inst. Analytical Chemistry, Germany
Bodas, Dhananjay, IMTEK, Germany
Borges Carval, Nuno, Universidade de Aveiro, Portugal
Bousbia-Salah, Mounir, University of Annaba, Algeria
Bouvet, Marcel, CNRS – UPMC, France
Brudzewski, Kazimierz, Warsaw University of Technology, Poland
Cai, Chenxin, Nanjing Normal University, China
Cai, Qingyun, Hunan University, China
Campanella, Luigi, University La Sapienza, Italy
Carvalho, Vitor, Minho University, Portugal
Cecelja, Franjo, Brunel University, London, UK
Cerdà Belmonte, Judith, Imperial College London, UK
Chakrabarty, Chandan Kumar, Universiti Tenaga Nasional, Malaysia
Chakravorty, Dipankar, Association for the Cultivation of Science, India
Changhai, Ru, Harbin Engineering University, China
Chaudhari, Gajanan, Shri Shivaji Science College, India
Chavali, Murthy, N.I. Center for Higher Education, (N.I. University), India
Chen, Jiming, Zhejiang University, China
Chen, Rongshun, National Tsing Hua University, Taiwan
Cheng, Kuo-Sheng, National Cheng Kung University, Taiwan
Chiang, Jeffrey (Cheng-Ta), Industrial Technol. Research Institute, Taiwan
Chiriac, Horia, National Institute of Research and Development, Romania
Chowdhuri, Arijit, University of Delhi, India
Chung, Wen-Yaw, Chung Yuan Christian University, Taiwan
Corres, Jesus, Universidad Publica de Navarra, Spain
Cortes, Camilo A., Universidad Nacional de Colombia, Colombia
Courtois, Christian, Université de Valenciennes, France
Cusano, Andrea, University of Sannio, Italy
D'Amico, Arnaldo, Università di Tor Vergata, Italy
De Stefano, Luca, Institute for Microelectronics and Microsystem, Italy
Deshmukh, Kiran, Shri Shivaji Mahavidyalaya, Barshi, India
Dickert, Franz L., Vienna University, Austria
Diegue, Angel, University of Barcelona, Spain
Dimitropoulos, Panos, University of Thessaly, Greece
Ding, Jianning, Jiangsu Polytechnic University, China
Djordjevic, Alexandar, City University of Hong Kong, Hong Kong
Donato, Nicola, University of Messina, Italy
Donato, Patricio, Universidad de Mar del Plata, Argentina
Dong, Feng, Tianjin University, China
Drljaca, Predrag, Intersema Sensoric SA, Switzerland
Dubey, Venketesh, Bournemouth University, UK
Enderle, Stefan, Univ. of Ulm and KTB Mechatronics GmbH, Germany
Erdem, Gursan K. Arzum, Ege University, Turkey
Erkmen, Aydan M., Middle East Technical University, Turkey
Estelle, Patrice, Insa Rennes, France
Estrada, Horacio, University of North Carolina, USA
Faiz, Adil, INSA Lyon, France
Fericean, Sorin, Balluff GmbH, Germany
Fernandes, Joana M., University of Porto, Portugal
Francioso, Luca, CNR-IMM Institute for Microelectronics and Microsystems, Italy
Francis, Laurent, University Catholique de Louvain, Belgium
Fu, Weiling, South-Western Hospital, Chongqing, China
Gaura, Elena, Coventry University, UK
Geng, Yanfeng, China University of Petroleum, China
Gole, James, Georgia Institute of Technology, USA
Gong, Hao, National University of Singapore, Singapore
Gonzalez de la Rosa, Juan Jose, University of Cadiz, Spain
Granel, Annette, Goteborg University, Sweden
Graff, Mason, The University of Texas at Arlington, USA
Guan, Shan, Eastman Kodak, USA
Guillet, Bruno, University of Caen, France
Guo, Zhen, New Jersey Institute of Technology, USA
Gupta, Narendra Kumar, Napier University, UK
Hadjiloucas, Sillas, The University of Reading, UK
Haider, Mohammad R., Sonoma State University, USA
Hashsham, Syed, Michigan State University, USA
Hasni, Abdelhafid, Bechar University, Algeria
Hernandez, Alvaro, University of Alcalá, Spain
Hernandez, Wilmar, Universidad Politécnica de Madrid, Spain
Homencovschi, Dorel, SUNY Binghamton, USA
Horstman, Tom, U.S. Automation Group, LLC, USA
Hsiai, Tzung (John), University of Southern California, USA
Huang, Jeng-Sheng, Chung Yuan Christian University, Taiwan
Huang, Star, National Tsing Hua University, Taiwan
Huang, Wei, PSG Design Center, USA
Hui, David, University of New Orleans, USA
Jaffrezic-Renault, Nicole, Ecole Centrale de Lyon, France
Jaime Calvo-Galleg, Jaime, Universidad de Salamanca, Spain
James, Daniel, Griffith University, Australia
Janting, Jakob, DELTA Danish Electronics, Denmark
Jiang, Liudi, University of Southampton, UK
Jiang, Wei, University of Virginia, USA
Jiao, Zheng, Shanghai University, China
John, Joachim, IMEC, Belgium
Kalach, Andrew, Voronezh Institute of Ministry of Interior, Russia
Kang, Moonho, Sunmoon University, Korea South
Kaniusas, Eugenijus, Vienna University of Technology, Austria
Katake, Anup, Texas A&M University, USA
Kausel, Wilfried, University of Music, Vienna, Austria
Kavasoglu, Nese, Mugla University, Turkey
Ke, Cathy, Tyndall National Institute, Ireland
Khelfaoui, Rachid, Université de Bechar, Algeria
Khan, Asif, Aligarh Muslim University, Aligarh, India
Kim, Min Young, Kyungpook National University, Korea South
Ko, Sang Choon, Electronics. and Telecom. Research Inst., Korea South
Kockar, Hakan, Balikesir University, Turkey
Kong, Ing, RMIT University, Australia
Kotulska, Malgorzata, Wroclaw University of Technology, Poland
Kratz, Henrik, Uppsala University, Sweden

Kumar, Arun, University of South Florida, USA
Kumar, Subodh, National Physical Laboratory, India
Kung, Chih-Hsien, Chang-Jung Christian University, Taiwan
Lacnjevac, Caslav, University of Belgrade, Serbia
Lay-Ekuakille, Aime, University of Lecce, Italy
Lee, Jang Myung, Pusan National University, Korea South
Lee, Jun Su, Amkor Technology, Inc. South Korea
Lei, Hua, National Starch and Chemical Company, USA
Li, Genxi, Nanjing University, China
Li, Hui, Shanghai Jiaotong University, China
Li, Xian-Fang, Central South University, China
Li, Yuefa, Wayne State University, USA
Liang, Yuanchang, University of Washington, USA
Liawruangrath, Saisunee, Chiang Mai University, Thailand
Liew, Kim Meow, City University of Hong Kong, Hong Kong
Lin, Hermann, National Kaohsiung University, Taiwan
Lin, Paul, Cleveland State University, USA
Linderholm, Pontus, EPFL - Microsystems Laboratory, Switzerland
Liu, Aihua, University of Oklahoma, USA
Liu Changgeng, Louisiana State University, USA
Liu, Cheng-Hsien, National Tsing Hua University, Taiwan
Liu, Songqin, Southeast University, China
Lodeiro, Carlos, University of Vigo, Spain
Lorenzo, Maria Encarnacio, Universidad Autonoma de Madrid, Spain
Lukaszewicz, Jerzy Pawel, Nicholas Copernicus University, Poland
Ma, Zhanfang, Northeast Normal University, China
Majstorovic, Vidosav, University of Belgrade, Serbia
Marquez, Alfredo, Centro de Investigacion en Materiales Avanzados, Mexico
Matay, Ladislav, Slovak Academy of Sciences, Slovakia
Mathur, Prafull, National Physical Laboratory, India
Maurya, D.K., Institute of Materials Research and Engineering, Singapore
Mekid, Samir, University of Manchester, UK
Melnik, Ivan, Photon Control Inc., Canada
Mendes, Paulo, University of Minho, Portugal
Mennell, Julie, Northumbria University, UK
Mi, Bin, Boston Scientific Corporation, USA
Minas, Graca, University of Minho, Portugal
Moghavvemi, Mahmoud, University of Malaya, Malaysia
Mohammadi, Mohammad-Reza, University of Cambridge, UK
Molina Flores, Esteban, Benemérita Universidad Autónoma de Puebla, Mexico
Moradi, Majid, University of Kerman, Iran
Morello, Rosario, University "Mediterranea" of Reggio Calabria, Italy
Mounir, Ben Ali, University of Sousse, Tunisia
Mulla, Imtiaz Sirajuddin, National Chemical Laboratory, Pune, India
Nabok, Aleksey, Sheffield Hallam University, UK
Neelamegam, Periasamy, Sastra Deemed University, India
Neshkova, Milka, Bulgarian Academy of Sciences, Bulgaria
Oberhammer, Joachim, Royal Institute of Technology, Sweden
Ould Lahoucine, Cherif, University of Guelma, Algeria
Pamidighanta, Sayanu, Bharat Electronics Limited (BEL), India
Pan, Jisheng, Institute of Materials Research & Engineering, Singapore
Park, Joon-Shik, Korea Electronics Technology Institute, Korea South
Penza, Michele, ENEA C.R., Italy
Pereira, Jose Miguel, Instituto Politecnico de Seteбал, Portugal
Petsev, Dimitar, University of New Mexico, USA
Pogacnik, Lea, University of Ljubljana, Slovenia
Post, Michael, National Research Council, Canada
Prance, Robert, University of Sussex, UK
Prasad, Ambika, Gulbarga University, India
Prateepasen, Asa, Kingmoungut's University of Technology, Thailand
Pullini, Daniele, Centro Ricerche FIAT, Italy
Pumera, Martin, National Institute for Materials Science, Japan
Radhakrishnan, S., National Chemical Laboratory, Pune, India
Rajanna, K., Indian Institute of Science, India
Ramadan, Qasem, Institute of Microelectronics, Singapore
Rao, Basuthkar, Tata Inst. of Fundamental Research, India
Raoof, Kosai, Joseph Fourier University of Grenoble, France
Reig, Candid, University of Valencia, Spain
Restivo, Maria Teresa, University of Porto, Portugal
Robert, Michel, University Henri Poincare, France
Rezazadeh, Ghader, Urmia University, Iran
Royo, Santiago, Universitat Politècnica de Catalunya, Spain
Rodriguez, Angel, Universidad Politécnica de Catalunya, Spain
Rothberg, Steve, Loughborough University, UK
Sadana, Ajit, University of Mississippi, USA
Sadeghian Marnani, Hamed, TU Delft, The Netherlands
Sandacci, Serghei, Sensor Technology Ltd., UK
Schneider, John K., Ultra-Scan Corporation, USA
Sengupta, Deepak, Advance Bio-Photonics, India
Shah, Kriyang, La Trobe University, Australia
Sapozhnikova, Ksenia, D.I.Mendeleyev Institute for Metrology, Russia
Saxena, Vibha, Bhabha Atomic Research Centre, Mumbai, India
Seif, Selemeni, Alabama A & M University, USA
Seifter, Achim, Los Alamos National Laboratory, USA
Silva Girao, Pedro, Technical University of Lisbon, Portugal
Singh, V. R., National Physical Laboratory, India
Slomovitz, Daniel, UTE, Uruguay
Smith, Martin, Open University, UK
Soleymanpour, Ahmad, Damghan Basic Science University, Iran
Somani, Prakash R., Centre for Materials for Electronics Technol., India
Srinivas, Talabattula, Indian Institute of Science, Bangalore, India
Srivastava, Arvind K., NanoSonix Inc., USA
Stefan-van Staden, Raluca-Ioana, University of Pretoria, South Africa
Sumriddetchka, Sarun, National Electronics and Computer Technology Center, Thailand
Sun, Chengliang, Polytechnic University, Hong-Kong
Sun, Dongming, Jilin University, China
Sun, Junhua, Beijing University of Aeronautics and Astronautics, China
Sun, Zhiqiang, Central South University, China
Suri, C. Raman, Institute of Microbial Technology, India
Sysoev, Victor, Saratov State Technical University, Russia
Szewczyk, Roman, Industrial Research Inst. for Automation and Measurement, Poland
Tan, Ooi Kiang, Nanyang Technological University, Singapore
Tang, Dianping, Southwest University, China
Tang, Jaw-Luen, National Chung Cheng University, Taiwan
Teker, Kasif, Frostburg State University, USA
Thirunavukkarasu, I., Manipal University Karnataka, India
Thumbavanam Pad, Kartik, Carnegie Mellon University, USA
Tian, Gui Yun, University of Newcastle, UK
Tsiantos, Vassilios, Technological Educational Institute of Kaval, Greece
Tsigara, Anna, National Hellenic Research Foundation, Greece
Twomey, Karen, University College Cork, Ireland
Valente, Antonio, University, Vila Real, - U.T.A.D., Portugal
Vanga, Raghav Rao, Summit Technology Services, Inc., USA
Vaseashta, Ashok, Marshall University, USA
Vazquez, Carmen, Carlos III University in Madrid, Spain
Vieira, Manuela, Instituto Superior de Engenharia de Lisboa, Portugal
Vigna, Benedetto, STMicroelectronics, Italy
Vrba, Radimir, Brno University of Technology, Czech Republic
Wandelt, Barbara, Technical University of Lodz, Poland
Wang, Jiangping, Xi'an Shiyou University, China
Wang, Kedong, Beihang University, China
Wang, Liang, Pacific Northwest National Laboratory, USA
Wang, Mi, University of Leeds, UK
Wang, Shinn-Fwu, Ching Yun University, Taiwan
Wang, Wei-Chih, University of Washington, USA
Wang, Wensheng, University of Pennsylvania, USA
Watson, Steven, Center for NanoSpace Technologies Inc., USA
Weiping, Yan, Dalian University of Technology, China
Wells, Stephen, Southern Company Services, USA
Wolkenberg, Andrzej, Institute of Electron Technology, Poland
Woods, R. Clive, Louisiana State University, USA
Wu, DerHo, National Pingtung Univ. of Science and Technology, Taiwan
Wu, Zhaoyang, Hunan University, China
Xiu Tao, Ge, Chuzhou University, China
Xu, Lisheng, The Chinese University of Hong Kong, Hong Kong
Xu, Sen, Drexel University, USA
Xu, Tao, University of California, Irvine, USA
Yang, Dongfang, National Research Council, Canada
Yang, Shuang-Hua, Loughborough University, UK
Yang, Wuqiang, The University of Manchester, UK
Yang, Xiaoling, University of Georgia, Athens, GA, USA
Yaping Dan, Harvard University, USA
Ymeti, Aurel, University of Twente, Netherlands
Yong Zhao, Northeastern University, China
Yu, Haihu, Wuhan University of Technology, China
Yuan, Yong, Massey University, New Zealand
Yufra Garcia, Alberto, Seville University, Spain
Zakaria, Zulkarnay, University Malaysia Perlis, Malaysia
Zagnoni, Michele, University of Southampton, UK
Zamani, Cyrus, Universitat de Barcelona, Spain
Zeni, Luigi, Second University of Naples, Italy
Zhang, Minglong, Shanghai University, China
Zhang, Quintao, University of California at Berkeley, USA
Zhang, Weiping, Shanghai Jiao Tong University, China
Zhang, Wenming, Shanghai Jiao Tong University, China
Zhang, Xueji, World Precision Instruments, Inc., USA
Zhong, Haoxiang, Henan Normal University, China
Zhu, Qing, Fujifilm Dimatix, Inc., USA
Zorzano, Luis, Universidad de La Rioja, Spain
Zourob, Mohammed, University of Cambridge, UK

Contents

Volume 126
Issue 3
March 2011

www.sensorsportal.com

ISSN 1726-5479

Research Articles

Human Heat Generator for Energy Scavenging with Wearable Thermopiles <i>Vladimir Leonov</i>	1
Fabrication of a Highly-sensitive Acetylcholine Sensor Based on AChOx Immobilized Smart-chips <i>M. M. Rahman</i>	11
Development of Pressure-Temperature Integrated Multifunction Sensor Using Piezo-Resistive Element <i>Palash K. Kundu, Gautam Sarkar and Chandan Dutta</i>	19
Prototype for Managing the Wheelchair Movements by Accelerometry <i>Daniel Alves Fusco, Alexandre Balbinot</i>	31
Design of an Automatic Path Finding Wheelchair with Intelligent Guidance System <i>Apratim Majumder, Niladri Banerjee, Shikha Nayak and B. Chakraborty</i>	42
Design and Manufacture an Ultrasonic Dispersion System with Automatic Frequency Adjusting Property <i>Herlina Abdul Rahim, Javad Abbaszadeh Bargoshadi, Sahar Sarrafi Ruzairi Abdul Rahim</i>	52
A Fusion Approach to Feature Extraction by Wavelet Decomposition and Principal Component Analysis in Transient Signal Processing of SAW Odor Sensor Array <i>Prashant Singh and R. D. S. Yadava</i>	64
Development of a Simple Traffic Sensor and System with Vehicle Classification Based on PVDF Film Element <i>D. R. Santoso, Abdurrouf, L. Nurriyah</i>	74
Practical Investigation of an Acoustic Encoder <i>Mohammad A. Alia, Mohammad Al-Khedher, Mazouz Salahat</i>	85
A Novel Method to Balance Inverted Pendulum by Angle Sensing Using Fuzzy Logic Supervised PID Controller <i>Sanjeev Kumar, Ashutosh K. Agarwal, Arpita Gupta, Himanshu Tripathi, Prachi Mohan Kulshrestha</i>	92
An Integrated Expert Controller for the Oven Temperature Control System <i>Nagabhushana Katte, Nagabhushan Raju Konduru, Bhaskar Pobbathi, and Parvathi Sidaraddi</i>	101
Implementation of PID Controller in MATLAB for Real Time DC Motor Speed Control System <i>Manjunatha Reddy H. K., Immanuel J., Parvathi C. S., P. Bhaskar and L. S. Sudheer</i>	110
Applying Time Series Analysis Model to Temperature Data in Greenhouses <i>Abdelhafid Hasni, Zouaoui Chikr-el-Mezouar, Belkacem Draoui and Thierry Boulard</i>	119

Growth Factor Inhibiting PKC Sensor in E-coli Environment Using Classification Technique and ANN Method

T. K. Basak, T.Ramanujam, S. Jeybalan, Madhubala Bhatt, Deepali Garg, Richa Garg

125

Authors are encouraged to submit article in MS Word (doc) and Acrobat (pdf) formats by e-mail: editor@sensorsportal.com
Please visit journal's webpage with preparation instructions: <http://www.sensorsportal.com/HTML/DIGEST/Submission.htm>

International Frequency Sensor Association (IFSA).

Call for Books Proposals

Sensors, MEMS, Measuring instrumentation, etc.

International Frequency Sensor Association Publishing



Benefits and rewards of being an IFSA author:

1) Royalties.

Today IFSA offers most high royalty in the world: you will receive 50 % of each book sold in comparison with 8-11 % from other publishers, and get payment on monthly basis compared with other publishers' yearly basis.

2) Quick Publication.

IFSA recognizes the value to our customers of timely information, so we produce your book quickly: 2 months publishing schedule compared with other publishers' 5-18-month schedule.

3) The Best Targeted Marketing and Promotion.

As a leading online publisher in sensors related fields, IFSA and its Sensors Web Portal has a great expertise and experience to market and promote your book worldwide. An extensive marketing plan will be developed for each new book, including intensive promotions in IFSA's media: journal, magazine, newsletter and online bookstore at Sensors Web Portal.

4) Published Format: pdf (Acrobat).


When you publish with IFSA your book will never go out of print and can be delivered to customers in a few minutes.

You are invited kindly to share in the benefits of being an IFSA author and to submit your book proposal or/and a sample chapter for review by e-mail to editor@sensorsportal.com These proposals may include technical references, application engineering handbooks, monographs, guides and textbooks. Also edited survey books, state-of-the art or state-of-the-technology, are of interest to us.

Mobile Advertising Solutions for Sensor Industry: How to reach 80,000+ addressable mobile audiences?



An industry first Smartphone mobile advertising solution for sensors manufacturers and distributors



50% OFF

for limited time interval



Create your account today and use a **discount coupon code ls10001** to start advertising your sensors now:

https://www.lesensor.com/sensor/Profiles/CreateNewAccount.aspx?sensor_portal=ls10001

Design of an Automatic Path Finding Wheelchair with Intelligent Guidance System

**¹Apratim MAJUMDER, ²Niladri BANERJEE, ³Shikha NAYAK
and ⁴B. CHAKRABORTY**

^{1,2}Department of Electronics and Communication Engineering
Techno India College of Technology, Kolkata, India

³Department of computer Science & Technology, Meghnath Saha Institute of Technology

⁴Faculty of Agricultural Engineering, BCKV, Kalyani, India.

E-mail: ¹apratim88@gmail.com, ²niladribanerjeehere@gmail.com, ³nayak.shikha@gmail.com

Received: 15 February 2011 /Accepted: 17 March 2011 /Published: 29 March 2011

Abstract: A conventional motorized wheelchair has been fitted with sensors and programmed with an intelligent guidance system to efficiently maneuver itself automatically from one point to another in a facility equipped with a grid of sensors that provide the wheelchair with the basic map of its course. The device described in this paper has been conceptualized such that once the wheelchair is given information regarding the starting and stopping point in a controlled facility, the wheelchair with this pre programmed information can efficiently construct a path towards its destination and automatically drive to that point from its present position while avoiding obstacles in its path and negotiating any turns and bends that it encounters in its course. This is achieved by means of sensors (IR and sonic) located at strategic points on the chair, circuits that control the speed of the motors, and a set of microcontrollers programmed to execute the different functions of the wheelchair. The facility in which the wheelchair works has been fitted with a set of sensors that form the basis of the network which is used by the program governing the wheelchair's automated movement to provide guidance to it by means of a course map. *Copyright © 2011 IFSA.*

Keywords: Wheelchair, Automatic, Sensor aided, Path finding, Motorized.

1.Introduction

A wheelchair is a chair with wheels, designed to be a replacement for walking, which can be propelled manually and also driven by motors. Wheelchairs are used by people for whom walking is difficult or

impossible due to illness (physiological or physical), injury, or disability. Medically a loss of mobility can be broadly attributed to two reasons- Musculoskeletal disorders such as paralysis, paresis, ataxia, fibromyalgia, etc. and neuropsychiatric disorders such as posttraumatic stress disorder, cognitive dysfunction etc. Motorized wheelchairs have gone through enormous modifications and technological enhancements over the last few decades. Over the years scientists have developed [1-13] various kinds of motorized-wheelchairs, some are verbally controlled by the user while some are user's mind-controlled. The most widely available ones are computer-driven. Most of these motorized-wheelchairs available in market need human intervention to guide the chair. Either the user uses steering/handle to maneuver the chair or uses digital/computer controls [1] to do the same. But for the people who are very old and hence unable to move their limbs systematically to guide the chair along the desired direction or people who due to illness would fail to do so, these motorized wheelchairs [2] do not suffice their requirements efficiently. Hence, our endeavor in this paper was to make such a system that will overcome this impediment effectively and can help the old and ailing or the injured to find their way from their present location to a given destination within a given closed system with minimal human interference. In the case, once the user sets the chair's present location and the desired destination onto the system, the chair with the help of a unique sensor-aided automatic path-finding algorithm finds its way through all turns and avoids collision to eventually reach the destination successfully. Unlike the other intelligent motorized-wheelchairs [3-5], this system uses an effective but simplistic design and simple mechanical and electronic components and hence is largely affordable to all people, thus providing mobility-aid to all.

2.Method of Approach

The device that has been designed is a Sensor Aided Automatic Path Finding Wheelchair. It is a motorized wheelchair designed to carry one occupant at a time. It moves on its own and requires no assistance for steering from the occupant of the wheelchair or from any outside individual. It just requires information regarding the starting and stopping points of its course. Using the supplied information it can decide upon the path to take in order to complete its journey. It can detect and avoid obstructions in its path.

Since this is a motorized wheelchair whose locomotion is automatic and the course that it takes is decided by the programming that governs the movement of the chair, the entire device can be described as consisting of the sections shown by Fig. 1.

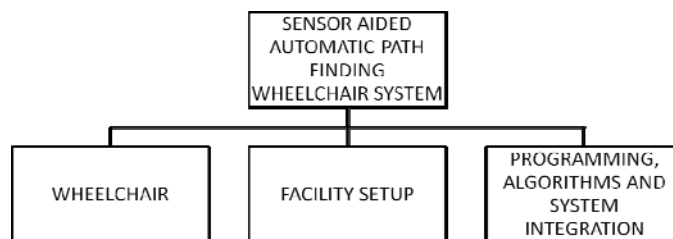


Fig. 1. Block Diagram showing sections of the sensor aided automatic path finding wheelchair system.

The system has been designed properly such that it can run and control the total system smoothly. The wheelchair with its facility setup and the other important part of the system, programming, algorithm and system integration has been taken up individually and designed properly. The basic part of the wheelchair consists of following parts as shown in Fig. 2:

- a) **The Seat:** This is the seat of the wheelchair where the occupant sits.
- b) **The Backrest:** This is the backrest of the wheelchair
- c) **Primary Wheels:** A pair of large wheels on either side of the chair that are primarily responsible for movement
- d) **Secondary Wheels:** A pair of secondary wheels that are responsible for changing the orientation and directing the movement of the chair
- e) **Sensor Panels:** Panels fitted with IR and sonic sensors that help in the movement of the wheelchair
 - **Panel 1:** This is the top most panel located above the head of the passenger and consists of a set of sensors used to detect and avoid collision
 - **Panel 2:** This is the middle most panel located at the waist region of the passenger and consists of a set of sensors used to detect and avoid collision
 - **Panel 3:** This is the 3rd panel located below Panel 2 at the footboard of the chair and consists of a set of sensors used to detect and avoid collision
 - **Panel 4:** This is the bottom most panel consisting of the sensors that help the chair to deduce its position in the facility while moving
 - **Panels 5 and 6:** Located on either side of the wheelchair and used in aiding its locomotion
- f) **Footboard**

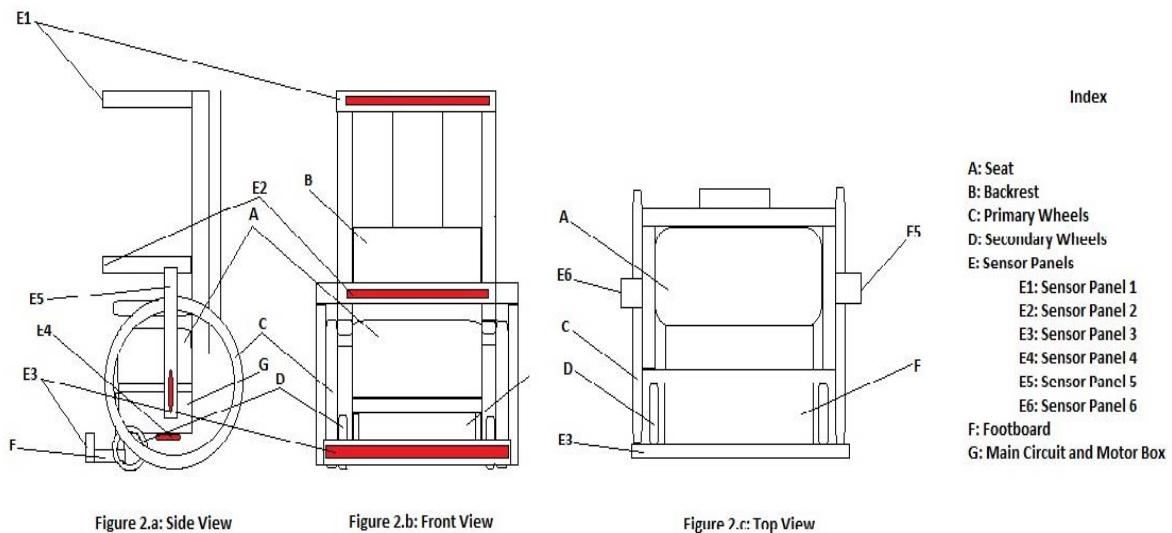


Fig. 2. The Wheelchair.

- g) **Main Circuit and Motor Box:** This box houses the motors, their concerned circuits, the microcontrollers (PIC18F252) and mother board, the memory devices and other electronic circuits used to assist the movement of the wheelchair. The Microcontroller PIC18F252 is ideal for our purpose because of its enhanced flash which will be useful in processing the inputs from sensors and other peripherals. It also has 23 I/O lines to further assist the entire process. It has 1536 bytes of RAM which is again suitable for this system. There are several other microcontrollers of similar specifications are available of different makes which can also be applied.

- h) **User Interface:** A screen and a keypad used to put in course related information into the wheelchair. Since the movements of the wheelchair are automated, it requires a guidance system to govern its movement to its destination from its starting point with efficiency and accuracy. In order to achieve this inside a closed facility, a guidance system has been constructed since common mapping technology like the GPS cannot function efficiently within a concise region. The entire facility has been broken up into a number of small points named “Bases” as shown in Figure 3. The bases are the

places at which the wheelchair can stop or commence its locomotion. The wheelchair cannot stop (except upon encountering an obstacle) in the region between two successive bases under normal circumstances. It can move from one base to the next, i.e. in other words its movement has been quantized between the different bases. The bases are designated by IR emitters embedded on the floor of the facility and that once switched on emit a steady beam of IR upwards from them up towards the ceiling. Each base emits an IR beam with a different wavelength and no two are the same. Now the facility setups are integrated to make the system perform successfully when a passenger is seated on the wheelchair. In the user interface the two points, the present position of the wheelchair and the destination of the wheelchair are keyed in using the keypad and screen. The present position of the wheelchair will always be the Base number of the base that it has last crossed. The destination of the wheelchair will always be the Base number of the base that it has to reach. Once the data has been punched in, the wheelchair commences its movement forward.

For a safe journey, the wheelchair can accelerate at 0.14 m/s^2 and can achieve a constant speed of 0.73152 m/s (i.e. 2.4 ft/s) in 5s. This is similar to the statistics of a wheelchair pushed by hand. As it moves forward, it moves over the IR emitters of each base. Only when it detects the IR emitter corresponding to its destination, it decelerates to a halt.

3. Analysis

The base point IR emitters continuously emit an IR beam in wall-to-wall direction, i.e. cutting through the line of movement of the chair. The Base Detection circuit of the wheelchair consists of the blocks shown in Fig. 3.

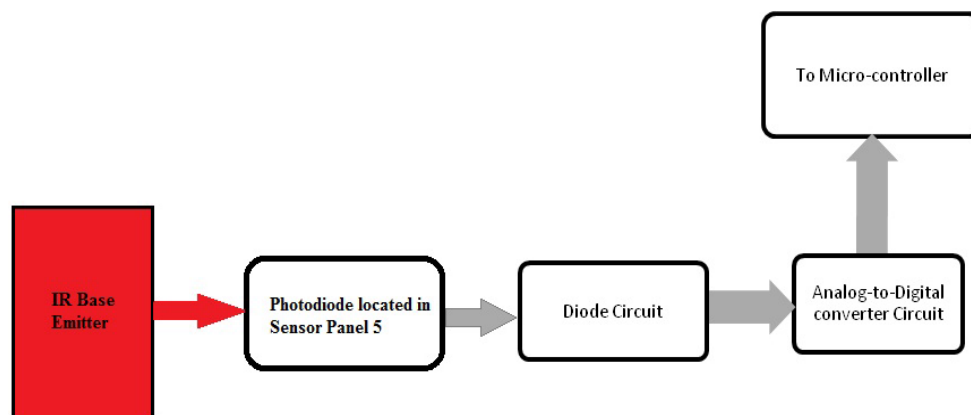


Fig. 3. Base Wheelchair Interaction.

Let the wheelchair crosses the Base with Base number 6. As soon as either (or both) of the Sensor Panel 5 or 6 located at the sides of the chair crosses directly over the IR emitter of the base, the IR beams strikes the photodiode. The photodiode produces a voltage signal by photovoltaic effect particular to the wavelength of the emitter. This signal is processed through an ADC circuit and is converted to the binary value 110 corresponding to the base number 6. This value is fed to the microcontroller. The microcontroller runs a program to compare this number with the number corresponding to the destination point punched in at the time of initiating the journey. If they match, the microcontroller instructs the chair to decelerate to a halt. Otherwise, the chair moves forward. Since each base has a unique number identifying it, the IR wavelengths of the corresponding emitters should be uniquely determined by this base number. The UPD-300 IR 1 photodiode from Alphalas GmbH Company or a photodiode of similar capability can be utilized. This photodiode has a response time of less than 1ns.

Considering the constant travel speed of the wheelchair to be somewhere around 0.73152 m/s (i.e. approximately 2.4 ft/s or 73 cm/s), and considering the size of the IR emitter to be of a diameter of 0.12 m approximately, the response time of the UPD-300 IR 1 is sufficient to detect the base. Additionally, the processing of the detected signal and corresponding notification for the deceleration to begin takes approximately a few more nanoseconds using high-end MPUs [7, 8]. This means that the chair motor will be almost instantly notified of a halt once it goes over the base, if required.

Once it is detected that the base number matches the destination base number, the motor is cut off and brakes are applied. Considering the wheelchair to be moving at a rather slow speed of about 0.73152 m/s (i.e. 2.4 ft/s), or it will require about 4 seconds and 0.6m (i.e. 2 ft) for the chair to come to a complete stop with a deceleration of 0.18 m/s^2 .

Upon commencement of the journey, the wheelchair moves forward. It acts otherwise only when it encounters an obstruction in its path. Let the wheelchair be negotiating a 90° right turn as shown in Fig. 4. When it was moving forward, it was steadily approaching Wall A. At the same time the sensors in Panels 5 and 6 kept track of the walls on either side of the chair. For the chair to encounter a turn, it must come face to face with a wall like that shown by Wall 'A' detected by Obstruction Detector (OD). At the same time there is usually a wall on one of its sides like that shown by Wall B. Here walls A and B form the corner of the bend. The wall on the other side (Wall C) ends at a certain point and bends to the right.

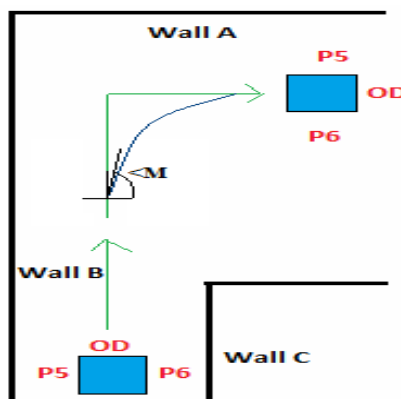








Fig. 4. Illustration of a 90 degrees right turn.

Hence, the wheelchair will negotiate the bend and perform a turn by following the rules as shown in Table 1.

When an obstacle comes in the path of wheelchair movements the obstructions has been detected by means of the three panels of sensors Panels 1, 2 and 3. It is obvious that the wheelchair can avoid the collisions that Panels 2 and 3 can detect but not the ones that are detected only by Panel 1 since it cannot duck under them.

In such a case it comes to a halt and sends a message to the control centre informing of the situation. Additionally, if all the three panels pick up the obstructions simultaneously, then the obstruction may be a wall or a human being standing in front of the chair. In such a case, it will sound a horn and wait for a certain period of time. If the obstruction does not move away (such a case as when the obstruction is a man) the chair notes it to be a wall and moves according to its bend negotiating algorithm. If the obstruction is determined by computation to be of a size navigable by the chair, the chair executes a collision avoidance method [9] to move past it.

Table 1. Wheelchair bend-turning conditions.

Obstruction Sensor Detection	Side Wall Sensor 1 Detection	Side Wall Sensor 2 Detection	Movement	Diagram
No	Yes	Yes	Forward	
No	No	No	Forward	
Yes	Yes	Yes	Forward till obstruction proximity is reached then halt	
Yes	Yes	No	Turn to wall side not being sensed by Sensor 2	
Yes	No	Yes	Turn to wall side not being sensed by Sensor 1	
Yes	No	No	Turn either way according to pre programmed directions	

The path-finding algorithm of the wheelchair has to work in conjunction with an effective collision avoidance system in order to negotiate with obstructions on its way [9]. This concept is very appropriate to our perspective and readily applicable in our system. Accordingly, the panels have been made wider than the width of the chair (taking into account the wheels) so that the peripheral sensors can make full use of their position and perform collision avoidance with full efficiency as shown in Fig. 5.

The sensors used for detecting collision are of the Ultrasonic type. The Ultrasonic Range Finder SRF08 is an ultrasonic sensor that has a detection range of 1" – 18'. Let the safe distance for the chair to turn or come to a stop be about 4 ft or 1.2 m. Then it has 14ft or 4.27 m to decelerate and travel over before reaching this point. Decelerating at a safe 0.06 m/s², it will take 11.7 s to come to a stop.

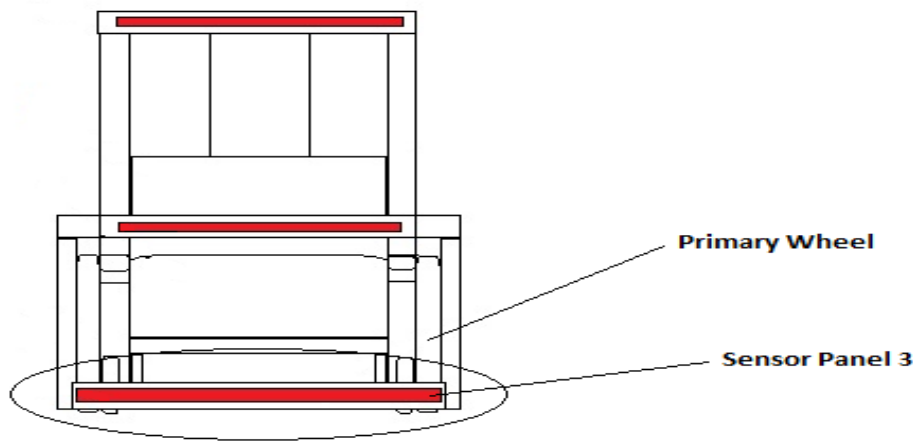


Fig. 5. Sensor Panel Width.

4. Map Construction and Development of Algorithm

The wheelchair is just provided with the starting point base number and the destination point base number. Using these two pieces of information and the map of the floor of the facility in which it operates, it generates a path between these two points and makes a list of the base numbers in between the starting and destination point base numbers [10]. These numbers are stored in an array and are popped out one by one as the chair travels over them. This method also allows the chair to correct its course if it strays. For that action, the chair keeps a list of the turns it performs in a separate array. When it comes over a base point that it should not have crossed in its path, i.e. it has gone off course, it retraces its path to the last turn and takes the turn in the opposite direction, thereby rectifying its course. The algorithm has been developed considering the certain conditions of the total system. The links between two base points are allocated a particular value (a weight) preferably the distance or the shortest distance between the two points. Each of these values is pre-stored in the memory of the wheelchair's computer. Using these values, the chair is able to calculate the most efficient route between two points as follows:

- A list of links made up by the base points immediately following the source point (present position base point) is made.
- If the destination base point is not one of them, then a sub list is made with the links between the last base points and their immediately following base points.
- This continues until one of the base points in the list is the destination point.
- If the destination point occurs twice in one end list, then the path with the smallest cumulative weight value is chosen.

Let us the map of base points shown in Fig. 6 is considered. Let the source and base points be A and 10 respectively. The path is constructed as follows.

The wheelchair can thus store the base point IDs in the sequence A-B-C and thus keep popping them one after the other as it crosses them and come to a halt once it pops C. The wheelchair will also decide upon which direction to move initially so that it does not travel excessive erroneous distances (i.e. according to the above example, moving right from A, towards D even after constructing the correct path because of it initially facing right from A) by the following method:

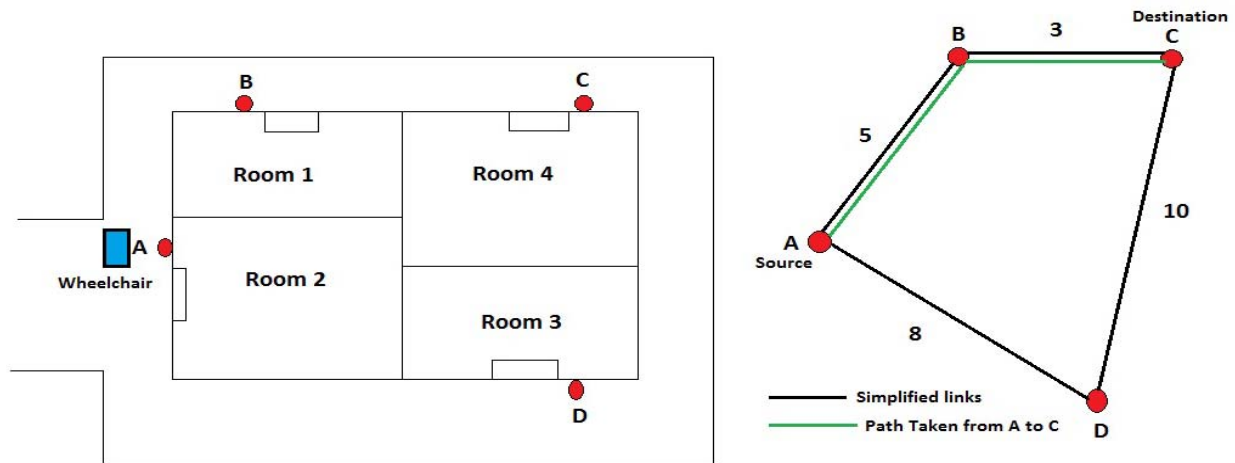


Fig. 6. Map Construction.

List 1: $AB = 5$, $AD = 8$

Sub-list 1: $BC = 3$, $DC = 10$

Final Path: A-B-C (since $AB + BC (= 8) < AD + DC (=18)$)

The base point sensors located on either walls or on one wall as mentioned before have two parts. These two parts emit two unique signals that the IR receptors in the Panels 5 and 6 of the chair pick up. Owing to the fact that the IR bases are a bit elongated and the command processing take a few nanoseconds with the chair moving very slowly at the onset of the journey, the chair is capable of picking up either of these two signals. The interpretation of the signals by the chair, give it the base IDs of the immediately next base and it can judge whether the course it has set is correct or not. In that way, according to the above example, even if it starts moving towards D initially, once it gets notified of this, it turns around and moves towards C. The Master Algorithm responsible for the automatic locomotion of the wheelchair is as shown in Fig. 7.

5. Discussion and Conclusion

This newly designed motorized wheelchair needs minimal human intervention unlike its predecessors. It does not need any human guidance to find its way from the starting point to the destination set initially by the user. Basic electronic and mechanical component and devices have been used in the making which makes it suitable for large-scale industrial production. Its simplistic design and optimized utilization of all its components effectively makes it a lot cheaper than other similar motor-driven wheelchairs and hence it may be affordable to all. This system has immense leverage for further enhancements and modifications and may be readily implemented inside closed systems like hospitals; rehabilitation centers etc. and hence may be highly useful for the sick people. Detailed research on this system is under progress and only the preliminary results have been reported in the paper.

Acknowledgements

The authors are thankful to the Techno India Group for their financial assistance in the present research and the Faculty of Agricultural Engineering, BCKV for providing the facilities to carry out this work.

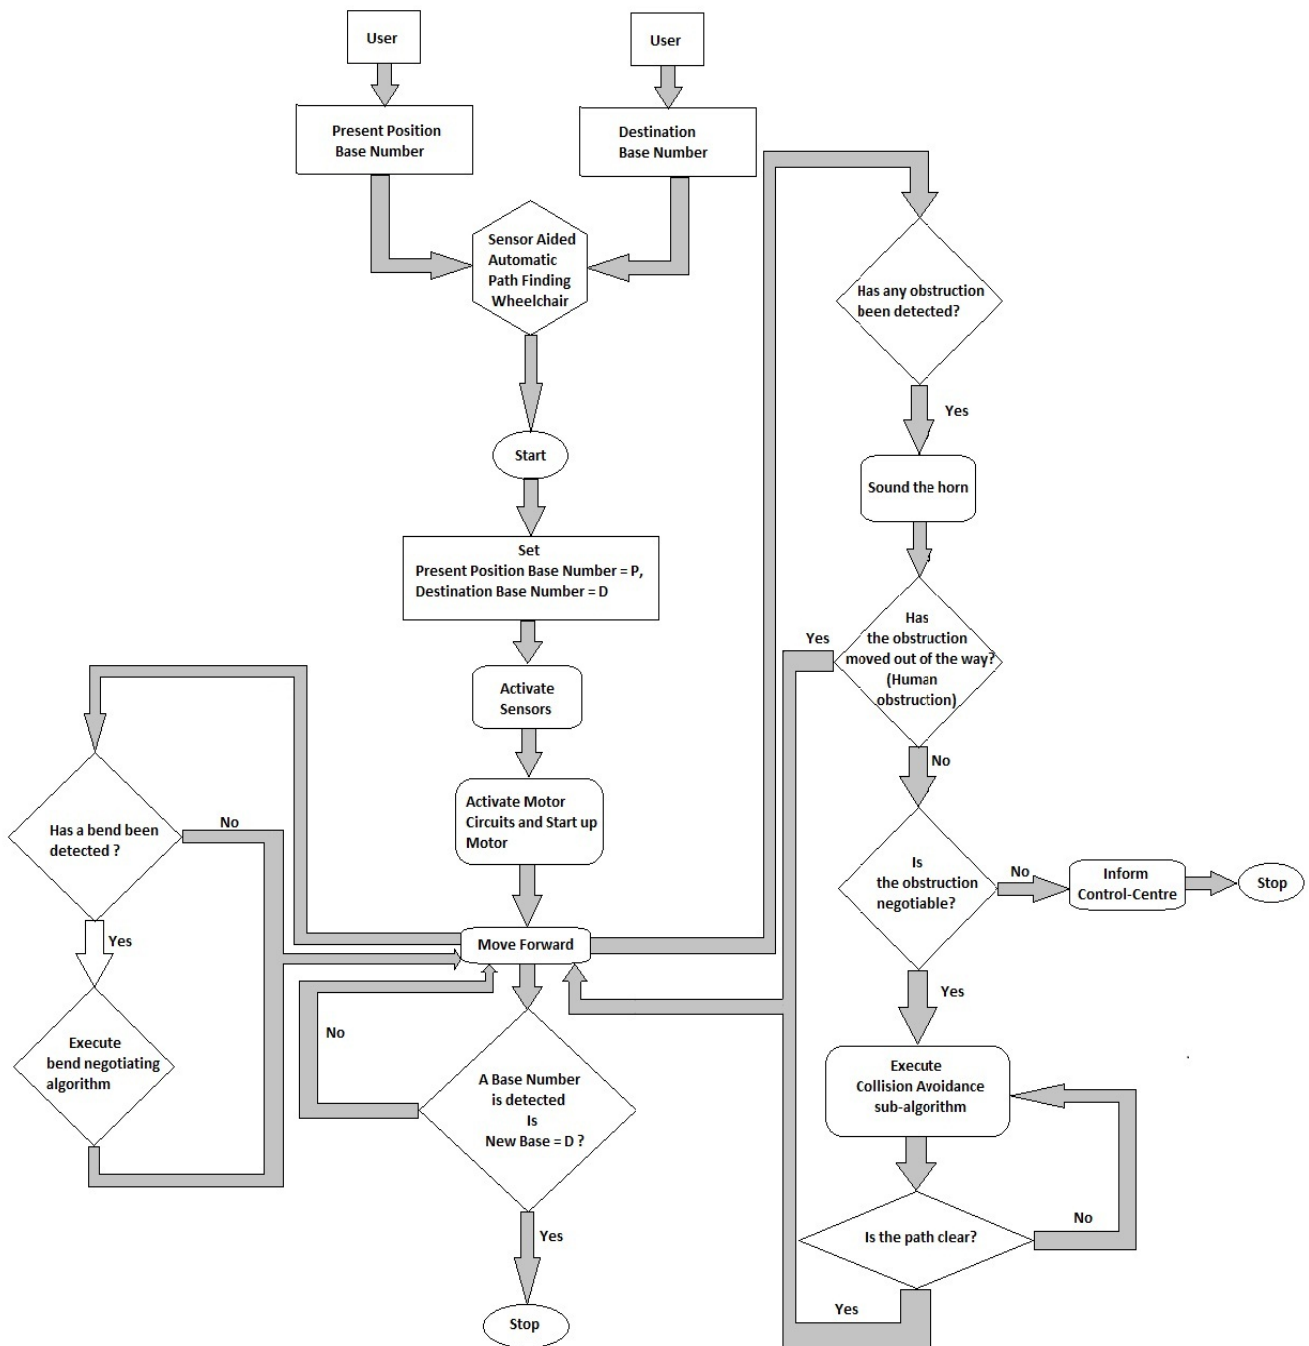


Fig. 7. Master Algorithm for chair motion control.

References

- [1]. Linda Fehr, Steven B. Skaar, Guillermo Del Castillo, Computer controlled power wheelchair navigation system, *United States Patent*, Patent No: US 6842, 692 B2, January 2005, pp. 1-16.
- [2]. Robert G. Klimo, Electric wheelchair with improved controlled circuit, *United States Patent*, Patent No: 4634, 941, January 1987, pp. 1-16.
- [3]. I. Iturrate, J. Antelis and J. Minguéz, Synchronous EEG brain-actuated wheelchair with automated navigation, in Proc. of the IEEE International Conference on Robotics and Automation, ICRA'09, Kobe, Japan, 2009.
- [4]. Raquel Coleman, Multi-feature automated wheelchair, *United States Patent*, Patent No: 6154, 690, November 2000, pp. 1-15.

- [5]. Jerome K. Kurtzberg, John Stephen Lew, Voice controlled motorized wheelchair with sensors and displays, *United States Patent*, Patent No: 6108, 592, August 2000, pp. 1–6.
- [6]. Mohamed Fezari, New Speech processor and ultrasonic sensor based embedded system to improve the control of the motorized wheelchair, *Journal of Applied Sciences*, 5, 10, 2009, pp. 1750-1755.
- [7]. Ervin Weisz, Electric wheelchair drive system, *United States Patent*, Patent No: 6863, 141 B2, March 2005, pp. 1-14.
- [8]. Raquel Coleman, Multi-feature automated wheelchair, *United States Patent*, Patent No: 6154, 690, November 2000, pp. 1-15.
- [9]. Sabyasachi Ghoshray, K. K Yen, A Comprehensive Robot Collision Avoidance Scheme by Two-Dimensional Geometric Modeling, *Proceedings of the International Conference on Robotics and Automation*, 1996, pp. 1087-1093.
- [10]. Hiroo Wakaumi, Koichi Nakamura, Takayoshi Matsumara, Development of an automatic wheelchair guided by a magnetic ferrite marker line, *Journal of Rehabilitation Research and Development*, Vol. 29, No. 1, April 1992, pp. 27-34.
- [11]. Eunjeong Ko, Jin Sun Ju, Eun Yi Kim, Nam Seo Goo, An Intelligent Wheelchair to enable mobility of severely disabled and elder people, *ICCE*, pp. 1-2, 2009, Digest of Technical Papers of International Conference on Consumer Electronics, 2009.
- [12]. Raciél Poot, Victor Chi, Lizzie Narváez, Erika Llanes, Maximiliano Canché, Design and Construction of a Prototype of an Electronic Wheelchair Drive for People with Motor Disabilities, *IJCSNS International Journal of Computer Science and Network Security*, Vol. 10, No. 7, July 2010, pp. 84-90.
- [13]. Sho Yokota, Hiroshi Hashimoto, Yasuhiro Ohyama, and Jinhua She, Electric Wheelchair Controlled by Human Body Motion, *Journal of Robotics and Mechatronics*, Vol. 22, No. 4, 2010, pp. 439-440.

2011 Copyright ©, International Frequency Sensor Association (IFSA). All rights reserved.
(<http://www.sensorsportal.com>)



**Sensors Industry
News**

**FREE Monthly
IFSA Newsletter**

ISSN 1726-6017

SUBSCRIBE NOW
subscribe@sensorsportal.com



The Second International Conference
on Sensor Device Technologies and Applications

SENSORDEVICES 2011

August 21-27, 2011 - French Riviera, France



Important deadlines:

Submission deadline	March 23, 2011
Notification	April 30, 2011
Registration	May 15, 2011
Camera ready	May 22, 2011

Tracks:

- Sensor devices
- Photonics
- Infrared
- Ultrasonic and Piezosensors
- Sensor device technologies
- Sensors signal conditioning and interfacing circuits
- Medical devices and sensors applications
- Sensors domain-oriented devices, technologies, and applications
- Sensor-based localization and tracking technologies

<http://www.iaria.org/conferences2011/SENSORDEVICES11.html>



The Fifth International Conference on Sensor
Technologies and Applications

SENSORCOMM 2011

August 21-27, 2011 - French Riviera, France



Important deadlines:

Submission deadline	March 23, 2011
Notification	April 30, 2011
Registration	May 15, 2011
Camera ready	May 22, 2011

Tracks:

- APASN: Architectures, protocols and algorithms of sensor networks
- MECSN: Energy, management and control of sensor networks
- RASQOFT: Resource allocation, services, QoS and fault tolerance in sensor networks
- PESMOSN: Performance, simulation and modelling of sensor networks
- SEMOSN: Security and monitoring of sensor networks
- SECSN: Sensor circuits and sensor devices
- RIWISN: Radio issues in wireless sensor networks
- SAPSN: Software, applications and programming of sensor networks
- DAIPSN: Data allocation and information in sensor networks
- DISN: Deployments and implementations of sensor networks
- UNWAT: Under water sensors and systems
- ENOPT: Energy optimization in wireless sensor networks

<http://www.iaria.org/conferences2011/SENSORCOMM11.html>



The Fourth International Conference on Advances
in Circuits, Electronics and Micro-electronics

CENICS 2011

August 21-27, 2011 - French Riviera, France



Important deadlines:

Submission deadline	March 23, 2011
Notification	April 30, 2011
Registration	May 15, 2011
Camera ready	May 22, 2011

Tracks:

- Semiconductors and applications
- Design, models and languages
- Signal processing circuits
- Arithmetic computational circuits
- Microelectronics
- Electronics technologies
- Special circuits
- Consumer electronics
- Application-oriented electronics

<http://www.iaria.org/conferences2011/CENICS11.html>

Guide for Contributors

Aims and Scope

Sensors & Transducers Journal (ISSN 1726-5479) provides an advanced forum for the science and technology of physical, chemical sensors and biosensors. It publishes state-of-the-art reviews, regular research and application specific papers, short notes, letters to Editor and sensors related books reviews as well as academic, practical and commercial information of interest to its readership. Because of it is a peer reviewed international journal, papers rapidly published in *Sensors & Transducers Journal* will receive a very high publicity. The journal is published monthly as twelve issues per year by International Frequency Sensor Association (IFSA). In addition, some special sponsored and conference issues published annually. *Sensors & Transducers Journal* is indexed and abstracted very quickly by Chemical Abstracts, IndexCopernicus Journals Master List, Open J-Gate, Google Scholar, etc. Since 2011 the journal is covered and indexed (including a Scopus, Embase, Engineering Village and Reaxys) in Elsevier products.

Topics Covered

Contributions are invited on all aspects of research, development and application of the science and technology of sensors, transducers and sensor instrumentations. Topics include, but are not restricted to:


- Physical, chemical and biosensors;
- Digital, frequency, period, duty-cycle, time interval, PWM, pulse number output sensors and transducers;
- Theory, principles, effects, design, standardization and modeling;
- Smart sensors and systems;
- Sensor instrumentation;
- Virtual instruments;
- Sensors interfaces, buses and networks;
- Signal processing;
- Frequency (period, duty-cycle)-to-digital converters, ADC;
- Technologies and materials;
- Nanosensors;
- Microsystems;
- Applications.

Submission of papers

Articles should be written in English. Authors are invited to submit by e-mail editor@sensorsportal.com 8-14 pages article (including abstract, illustrations (color or grayscale), photos and references) in both: MS Word (doc) and Acrobat (pdf) formats. Detailed preparation instructions, paper example and template of manuscript are available from the journal's webpage: <http://www.sensorsportal.com/HTML/DIGEST/Submission.htm> Authors must follow the instructions strictly when submitting their manuscripts.

Advertising Information

Advertising orders and enquires may be sent to sales@sensorsportal.com Please download also our media kit: http://www.sensorsportal.com/DOWNLOADS/Media_Kit_2011.pdf

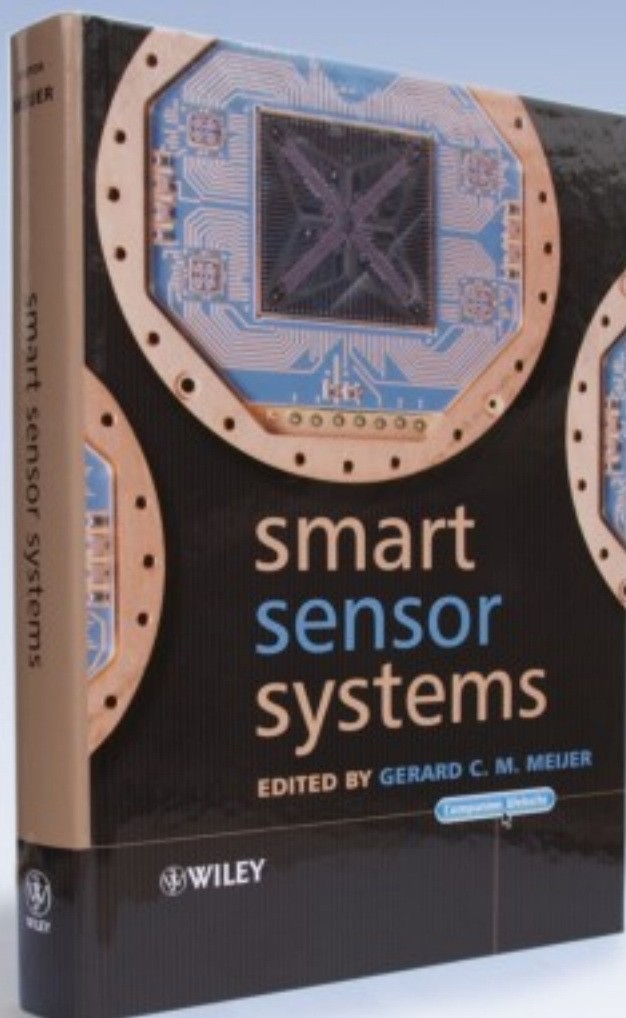

'Written by an internationally-recognized team of experts, this book reviews recent developments in the field of smart sensors systems, providing complete coverage of all important systems aspects. It takes a multidisciplinary approach to the understanding, design and use of smart sensor systems, their building blocks and methods of signal processing.'



Order online:

http://www.sensorsportal.com/HTML/BOOKSTORE/Smart_Sensor_Systems.htm

www.sensorsportal.com