

ISSN 1726-5479

SENSORS & TRANSDUCERS

7 vol. 130
/ 11



Sensor Networks and Wireless Sensor Networks

International Frequency Sensor Association Publishing



Editors-in-Chief: professor Sergey Y. Yurish, tel.: +34 696067716, e-mail: editor@sensorsportal.com

Editors for Western Europe

Meijer, Gerard C.M., Delft University of Technology, The Netherlands
Ferrari, Vittorio, Università di Brescia, Italy

Editor South America

Costa-Felix, Rodrigo, Inmetro, Brazil

Editor for Eastern Europe

Sachenko, Anatoly, Ternopil State Economic University, Ukraine

Editors for North America

Datskos, Panos G., Oak Ridge National Laboratory, USA
Fabien, J. Josse, Marquette University, USA
Katz, Evgeny, Clarkson University, USA

Editor for Asia

Ohshima, Shinji, Tokyo Institute of Technology, Japan

Editor for Asia-Pacific

Mukhopadhyay, Subhas, Massey University, New Zealand

Editorial Advisory Board

Abdul Rahim, Ruzairi, Universiti Teknologi, Malaysia
Ahmad, Mohd Noor, Northern University of Engineering, Malaysia
Annamalai, Karthikeyan, National Institute of Advanced Industrial Science and Technology, Japan
Arcega, Francisco, University of Zaragoza, Spain
Arguel, Philippe, CNRS, France
Ahn, Jae-Pyoung, Korea Institute of Science and Technology, Korea
Arndt, Michael, Robert Bosch GmbH, Germany
Ascoli, Giorgio, George Mason University, USA
Atalay, Selcuk, Inonu University, Turkey
Atghiaee, Ahmad, University of Tehran, Iran
Augutis, Vygtantas, Kaunas University of Technology, Lithuania
Avachit, Patil Lalchand, North Maharashtra University, India
Ayesh, Aladdin, De Montfort University, UK
Azamimi, Azian binti Abdullah, Universiti Malaysia Perlis, Malaysia
Bahreyni, Behraad, University of Manitoba, Canada
Baliga, Shankar, B., General Motors Transnational, USA
Baoxian, Ye, Zhengzhou University, China
Barford, Lee, Agilent Laboratories, USA
Barlingay, Ravindra, RF Arrays Systems, India
Basu, Sukumar, Jadavpur University, India
Beck, Stephen, University of Sheffield, UK
Ben Bouzid, Sihem, Institut National de Recherche Scientifique, Tunisia
Benachaiba, Chellali, Universitaire de Bechar, Algeria
Binnie, T. David, Napier University, UK
Bischoff, Gerlinde, Inst. Analytical Chemistry, Germany
Bodas, Dhananjay, IMTEK, Germany
Borges Carval, Nuno, Universidade de Aveiro, Portugal
Bousbia-Salah, Mounir, University of Annaba, Algeria
Bouvet, Marcel, CNRS – UPMC, France
Brudzewski, Kazimierz, Warsaw University of Technology, Poland
Cai, Chenxin, Nanjing Normal University, China
Cai, Qingyun, Hunan University, China
Campanella, Luigi, University La Sapienza, Italy
Carvalho, Vitor, Minho University, Portugal
Cecelja, Franjo, Brunel University, London, UK
Cerda Belmonte, Judith, Imperial College London, UK
Chakrabarty, Chandan Kumar, Universiti Tenaga Nasional, Malaysia
Chakravorty, Dipankar, Association for the Cultivation of Science, India
Changhai, Ru, Harbin Engineering University, China
Chaudhari, Gajanan, Shri Shivaji Science College, India
Chavali, Murthy, N.I. Center for Higher Education, (N.I. University), India
Chen, Jiming, Zhejiang University, China
Chen, Rongshun, National Tsing Hua University, Taiwan
Cheng, Kuo-Sheng, National Cheng Kung University, Taiwan
Chiang, Jeffrey (Cheng-Ta), Industrial Technol. Research Institute, Taiwan
Chiriac, Horia, National Institute of Research and Development, Romania
Chowdhuri, Arijit, University of Delhi, India
Chung, Wen-Yaw, Chung Yuan Christian University, Taiwan
Corres, Jesus, Universidad Publica de Navarra, Spain
Cortes, Camilo A., Universidad Nacional de Colombia, Colombia
Courtois, Christian, Universite de Valenciennes, France
Cusano, Andrea, University of Sannio, Italy
D'Amico, Arnaldo, Università di Tor Vergata, Italy
De Stefano, Luca, Institute for Microelectronics and Microsystem, Italy
Deshmukh, Kiran, Shri Shivaji Mahavidyalaya, Barshi, India
Dickert, Franz L., Vienna University, Austria
Dieguez, Angel, University of Barcelona, Spain
Dighavkar, C. G., M.G. Vidyamandir's L. V.H. College, India
Dimitropoulos, Panos, University of Thessaly, Greece
Ding, Jianning, Jiangsu Polytechnic University, China
Djordjevic, Alexander, City University of Hong Kong, Hong Kong

Donato, Nicola, University of Messina, Italy
Donato, Patricio, Universidad de Mar del Plata, Argentina
Dong, Feng, Tianjin University, China
Driljaca, Predrag, Intersema Sensoric SA, Switzerland
Dubey, Venkatesh, Bournemouth University, UK
Enderle, Stefan, Univ. of Ulm and KTB Mechatronics GmbH, Germany
Erdem, Gursan K. Arzum, Ege University, Turkey
Erkmen, Aydan M., Middle East Technical University, Turkey
Estelle, Patrice, Insa Rennes, France
Estrada, Horacio, University of North Carolina, USA
Faiz, Adil, INSA Lyon, France
Fericean, Sorin, Balluff GmbH, Germany
Fernandes, Joana M., University of Porto, Portugal
Francioso, Luca, CNR-IMM Institute for Microelectronics and Microsystems, Italy
Francis, Laurent, University Catholique de Louvain, Belgium
Fu, Weiling, South-Western Hospital, Chongqing, China
Gaura, Elena, Coventry University, UK
Geng, Yanfeng, China University of Petroleum, China
Gole, James, Georgia Institute of Technology, USA
Gong, Hao, National University of Singapore, Singapore
Gonzalez de la Rosa, Juan Jose, University of Cadiz, Spain
Grael, Annette, Goteborg University, Sweden
Graff, Mason, The University of Texas at Arlington, USA
Guan, Shan, Eastman Kodak, USA
Guillet, Bruno, University of Caen, France
Guo, Zhen, New Jersey Institute of Technology, USA
Gupta, Narendra Kumar, Napier University, UK
Hadjiloucas, Sillas, The University of Reading, UK
Haider, Mohammad R., Sonoma State University, USA
Hashsham, Syed, Michigan State University, USA
Hasni, Abdelhafid, Bechar University, Algeria
Hernandez, Alvaro, University of Alcalá, Spain
Hernandez, Wilmar, Universidad Politecnica de Madrid, Spain
Homentcovschi, Dorel, SUNY Binghamton, USA
Horstman, Tom, U.S. Automation Group, LLC, USA
Hsiai, Tzung (John), University of Southern California, USA
Huang, Jeng-Sheng, Chung Yuan Christian University, Taiwan
Huang, Star, National Tsing Hua University, Taiwan
Huang, Wei, PSG Design Center, USA
Hui, David, University of New Orleans, USA
Jaffrezic-Renault, Nicole, Ecole Centrale de Lyon, France
Jaime Calvo-Galleg, Jaime, Universidad de Salamanca, Spain
James, Daniel, Griffith University, Australia
Janting, Jakob, DELTA Danish Electronics, Denmark
Jiang, Liudi, University of Southampton, UK
Jiang, Wei, University of Virginia, USA
Jiao, Zheng, Shanghai University, China
John, Joachim, IMEC, Belgium
Kalach, Andrew, Voronezh Institute of Ministry of Interior, Russia
Kang, Moonho, Sunmoon University, Korea South
Kaniusas, Eugenijus, Vienna University of Technology, Austria
Katake, Anup, Texas A&M University, USA
Kausel, Wilfried, University of Music, Vienna, Austria
Kavasoglu, Nese, Mugla University, Turkey
Ke, Cathy, Tyndall National Institute, Ireland
Khelfaoui, Rachid, Université de Bechar, Algeria
Khan, Asif, Aligarh Muslim University, Aligarh, India
Kim, Min Young, Kyungpook National University, Korea South
Ko, Sang Choon, Electronics. and Telecom. Research Inst., Korea South
Kotulska, Malgorzata, Wroclaw University of Technology, Poland
Kratz, Henrik, Uppsala University, Sweden
Kockar, Hakan, Balikesir University, Turkey

Kong, Ing, RMIT University, Australia
Kumar, Arun, University of South Florida, USA
Kumar, Subodh, National Physical Laboratory, India
Kung, Chih-Hsien, Chang-Jung Christian University, Taiwan
Lacnjevac, Caslav, University of Belgrade, Serbia
Lay-Ekuakille, Aime, University of Lecce, Italy
Lee, Jang Myung, Pusan National University, Korea South
Lee, Jun Su, Amkor Technology, Inc. South Korea
Lei, Hua, National Starch and Chemical Company, USA
Li, Genxi, Nanjing University, China
Li, Hui, Shanghai Jiaotong University, China
Li, Xian-Fang, Central South University, China
Li, Yuefa, Wayne State University, USA
Liang, Yuanchang, University of Washington, USA
Liawruangrath, Saisunee, Chiang Mai University, Thailand
Liew, Kim Meow, City University of Hong Kong, Hong Kong
Lin, Hermann, National Kaohsiung University, Taiwan
Lin, Paul, Cleveland State University, USA
Linderholm, Pontus, EPFL - Microsystems Laboratory, Switzerland
Liu, Aihua, University of Oklahoma, USA
Liu Changgeng, Louisiana State University, USA
Liu, Cheng-Hsien, National Tsing Hua University, Taiwan
Liu, Songqin, Southeast University, China
Lodeiro, Carlos, University of Vigo, Spain
Lorenzo, Maria Encarnacio, Universidad Autonoma de Madrid, Spain
Lukaszewicz, Jerzy Pawel, Nicholas Copernicus University, Poland
Ma, Zhanfang, Northeast Normal University, China
Majstorovic, Vidosav, University of Belgrade, Serbia
Malyshev, V.V., National Research Centre 'Kurchatov Institute', Russia
Marquez, Alfredo, Centro de Investigacion en Materiales Avanzados, Mexico
Matay, Ladislav, Slovak Academy of Sciences, Slovakia
Mathur, Prafull, National Physical Laboratory, India
Maurya, D.K., Institute of Materials Research and Engineering, Singapore
Mekid, Samir, University of Manchester, UK
Melnyk, Ivan, Photon Control Inc., Canada
Mendes, Paulo, University of Minho, Portugal
Mennell, Julie, Northumbria University, UK
Mi, Bin, Boston Scientific Corporation, USA
Minas, Graca, University of Minho, Portugal
Moghavvemi, Mahmoud, University of Malaya, Malaysia
Mohammadi, Mohammad-Reza, University of Cambridge, UK
Molina Flores, Esteban, Benemérita Universidad Autónoma de Puebla, Mexico
Moradi, Majid, University of Kerman, Iran
Morello, Rosario, University "Mediterranea" of Reggio Calabria, Italy
Mounir, Ben Ali, University of Sousse, Tunisia
Mulla, Imtiaz Sirajuddin, National Chemical Laboratory, Pune, India
Nabok, Aleksey, Sheffield Hallam University, UK
Neelamegam, Periasamy, Sastra Deemed University, India
Neshkova, Milka, Bulgarian Academy of Sciences, Bulgaria
Oberhammer, Joachim, Royal Institute of Technology, Sweden
Ould Lahoucine, Cherif, University of Guelma, Algeria
Pamidighanta, Sayanu, Bharat Electronics Limited (BEL), India
Pan, Jisheng, Institute of Materials Research & Engineering, Singapore
Park, Joon-Shik, Korea Electronics Technology Institute, Korea South
Penza, Michele, ENEA C.R., Italy
Pereira, Jose Miguel, Instituto Politecnico de Seteбал, Portugal
Petsev, Dimitar, University of New Mexico, USA
Pogacnik, Lea, University of Ljubljana, Slovenia
Post, Michael, National Research Council, Canada
Prance, Robert, University of Sussex, UK
Prasad, Ambika, Gulbarga University, India
Prateepsen, Asa, Kingmoungut's University of Technology, Thailand
Pullini, Daniele, Centro Ricerche FIAT, Italy
Pumera, Martin, National Institute for Materials Science, Japan
Radhakrishnan, S., National Chemical Laboratory, Pune, India
Rajanna, K., Indian Institute of Science, India
Ramadan, Qasem, Institute of Microelectronics, Singapore
Rao, Basuthkar, Tata Inst. of Fundamental Research, India
Raouf, Kosai, Joseph Fourier University of Grenoble, France
Rastogi Shiva, K., University of Idaho, USA
Reig, Candid, University of Valencia, Spain
Restivo, Maria Teresa, University of Porto, Portugal
Robert, Michel, University Henri Poincare, France
Rezazadeh, Ghader, Urmia University, Iran
Royo, Santiago, Universitat Politècnica de Catalunya, Spain
Rodriguez, Angel, Universidad Politécnica de Catalunya, Spain
Rothberg, Steve, Loughborough University, UK
Sadana, Ajit, University of Mississippi, USA
Sadeghian Marnani, Hamed, TU Delft, The Netherlands
Sandacci, Serghei, Sensor Technology Ltd., UK
Sapozhnikova, Ksenia, D.I.Mendeleyev Institute for Metrology, Russia
Saxena, Vibha, Bhabha Atomic Research Centre, Mumbai, India
Schneider, John K., Ultra-Scan Corporation, USA
Sengupta, Deepak, Advance Bio-Photonics, India
Seif, Selemeni, Alabama A & M University, USA
Seifter, Achim, Los Alamos National Laboratory, USA
Shah, Kriyang, La Trobe University, Australia
Silva Girao, Pedro, Technical University of Lisbon, Portugal
Singh, V. R., National Physical Laboratory, India
Slomovitz, Daniel, UTE, Uruguay
Smith, Martin, Open University, UK
Soleymanpour, Ahmad, Damghan Basic Science University, Iran
Somani, Prakash R., Centre for Materials for Electronics Technol., India
Srinivas, Talabattula, Indian Institute of Science, Bangalore, India
Srivastava, Arvind K., NanoSonix Inc., USA
Stefan-van Staden, Raluca-Ioana, University of Pretoria, South Africa
Sumriddetchka, Sarun, National Electronics and Computer Technology Center, Thailand
Sun, Chengliang, Polytechnic University, Hong-Kong
Sun, Dongming, Jilin University, China
Sun, Junhua, Beijing University of Aeronautics and Astronautics, China
Sun, Zhiqiang, Central South University, China
Suri, C. Raman, Institute of Microbial Technology, India
Sysoev, Victor, Saratov State Technical University, Russia
Szewczyk, Roman, Industrial Research Inst. for Automation and Measurement, Poland
Tan, Ooi Kiang, Nanyang Technological University, Singapore
Tang, Dianping, Southwest University, China
Tang, Jaw-Luen, National Chung Cheng University, Taiwan
Teker, Kasif, Frostburg State University, USA
Thirunavukkarasu, I., Manipal University Karnataka, India
Thumbavanam Pad, Kartik, Carnegie Mellon University, USA
Tian, Gui Yun, University of Newcastle, UK
Tsiantos, Vassilios, Technological Educational Institute of Kaval, Greece
Tsigara, Anna, National Hellenic Research Foundation, Greece
Twomey, Karen, University College Cork, Ireland
Valente, Antonio, University, Vila Real, - U.T.A.D., Portugal
Vanga, Raghav Rao, Summit Technology Services, Inc., USA
Vaseashta, Ashok, Marshall University, USA
Vazquez, Carmen, Carlos III University in Madrid, Spain
Vieira, Manuela, Instituto Superior de Engenharia de Lisboa, Portugal
Vigna, Benedetto, STMicroelectronics, Italy
Vrba, Radimir, Brno University of Technology, Czech Republic
Wandelt, Barbara, Technical University of Lodz, Poland
Wang, Jiangping, Xi'an Shiyong University, China
Wang, Kedong, Beihang University, China
Wang, Liang, Pacific Northwest National Laboratory, USA
Wang, Mi, University of Leeds, UK
Wang, Shinn-Fwu, Ching Yun University, Taiwan
Wang, Wei-Chih, University of Washington, USA
Wang, Wensheng, University of Pennsylvania, USA
Watson, Steven, Center for NanoSpace Technologies Inc., USA
Weiping, Yan, Dalian University of Technology, China
Wells, Stephen, Southern Company Services, USA
Wolkenberg, Andrzej, Institute of Electron Technology, Poland
Woods, R. Clive, Louisiana State University, USA
Wu, DerHo, National Pingtung Univ. of Science and Technology, Taiwan
Wu, Zhaoyang, Hunan University, China
Xiu Tao, Ge, Chuzhou University, China
Xu, Lisheng, The Chinese University of Hong Kong, Hong Kong
Xu, Sen, Drexel University, USA
Xu, Tao, University of California, Irvine, USA
Yang, Dongfang, National Research Council, Canada
Yang, Shuang-Hua, Loughborough University, UK
Yang, Wuqiang, The University of Manchester, UK
Yang, Xiaoling, University of Georgia, Athens, GA, USA
Yaping Dan, Harvard University, USA
Ymeti, Aurel, University of Twente, Netherlands
Yong Zhao, Northeastern University, China
Yu, Haihu, Wuhan University of Technology, China
Yuan, Yong, Massey University, New Zealand
Yufera Garcia, Alberto, Seville University, Spain
Zakaria, Zulkarnay, University Malaysia Perlis, Malaysia
Zagnoni, Michele, University of Southampton, UK
Zamani, Cyrus, Universitat de Barcelona, Spain
Zeni, Luigi, Second University of Naples, Italy
Zhang, Minglong, Shanghai University, China
Zhang, Qintao, University of California at Berkeley, USA
Zhang, Weiping, Shanghai Jiao Tong University, China
Zhang, Wenming, Shanghai Jiao Tong University, China
Zhang, Xueji, World Precision Instruments, Inc., USA
Zhong, Haoxiang, Henan Normal University, China
Zhu, Qing, Fujifilm Dimatix, Inc., USA
Zorzano, Luis, Universidad de La Rioja, Spain
Zourob, Mohammed, University of Cambridge, UK

Contents

Volume 130
Issue 7
July 2011

www.sensorsportal.com

ISSN 1726-5479

Research Articles

Effects of Rayleigh Fading on Energy Level Performance of Adaptive Power Based WSN <i>Arnab Nandi and Sumit Kundu</i>	1
Interfacing SAW Resonators for Wireless High Temperature Applications <i>Mohammad Javadian Sarraf, M. N. Hamidon, Maryam Mohd. Isa, Alyani Ismail, Amir Reza Zarabi</i>	11
Outage and Energy Performance of Layered CDMA Wireless Sensor Network with Space Diversity <i>U. Datta, P. K. Sahu, Sumit Kundu</i>	23
Optimization of Energy Consumption of Rain Gauge Network Using MSG Infrared Image <i>Mourad Lahdir, Mohand Tahanout, Mourad Laghrouche, Soltane Ameur</i>	38
Application of Swarm Intelligence Based Routing protocols for Wireless Adhoc Sensor Network <i>Mrutyunjaya Panda</i>	48
Extending Coverage and Lifetime of K-coverage Wireless Sensor Networks Using Improved Harmony Search <i>Shohreh Ebrahimnezhad, Hoda Jalal Kamali and Mohsen Ebrahimi Moghaddam</i>	61
Switching and Release Time Analysis of Electrostatically Actuated Capacitive RF MEMS Switches <i>S. Shekhar, K. J. Vinoy, G. K. Ananthasuresh</i>	77
Calibration Model for Industrial Load Cells <i>"Moh'd Sami" Ashhab</i>	91
A New Shape Memory Alloy Based Smart Encoder for Sensing of Direction and Angular Motion <i>Bishakh Bhattacharya and Om Prakash Patel</i>	103
An Analytical Method to Determine the Response of a Micro Capacitive Pressure Sensor <i>Ashwin Simha, S. M. Kulkarni and S. Meenatchisundaram</i>	118
Thickness Effect of Micro Speaker Copper Coil Fabrication Process <i>F. L. Ayat, M. Moghavvemi, A. Attaran</i>	127
Design, Simulation and Analysis of Cantilever Sensor for in-Vitro LDL Detection <i>Dr. S. Hosimin Thilagar, A. R. Kalaiarasi</i>	136
Improvement on the Lifetime of the WSN Using Energy Efficiency Saving of Leach Protocol (New Improved LEACH) <i>Muneer Bani Yassein, Hassan Mistareehi</i>	142

Application of Swarm Intelligence Based Routing protocols for Wireless Adhoc Sensor Network

Mrutyunjaya PANDA

Department of Electronics and Communication Engineering
Gandhi Institute for Technological Advancement, Bhubaneswar
Odisha, India

E-mail: mrutyunjaya.2007@rediffmail.com

Received: 25 June 2011 / Accepted: 26 July 2011 / Published: 29 July 2011

Abstract: The enormous growth of wireless sensor network (WSN) research has opined challenges about their ease in implementation and performance evaluation. Efficient swarm intelligence based routing protocols that can be used to obtain the application specific service guarantee are the key design issues in designing a WSN model. In this paper, an experimental testbed is designed with 100 sensor nodes deployed in a dense environment to address the scalability and performance issues of WSN. In this paper, we use Flooded Piggyback (FP) and SC-MCBR ant colony based routing along with AODV and MCBR Tree in order to design an efficient WSN model. Finally, simulation results are presented with various performance measures to understand the efficacy of the proposed WSN design. *Copyright © 2011 IFSA.*

Keywords: Wireless sensor network, Ant-colony, Swarm intelligence, Energy, Latency, Throughput.

1. Introduction

Wireless Sensor Network (WSN) consists of large number of small nodes with sensing, computation and communication capabilities [1] which are deployed in such a manner that they can satisfy the phenomena of interest [2]. Recent developments in wireless communication networks and with the invent of MEMS (Micro Electro Mechanical Systems) technology [3] make it possible to obtain tiny sensors with low power consumption and short range communication capabilities with less production costs for a wide range of applications. The areas of application behind the WSN research are military, medical, intrusion detection and environmental applications.

The main working principle of the sensor node (also called as motes) is to sense and collect the valuable information from the domain of interest, process them and then finally transmit it to the sink for necessary application at the end. So, various routing protocols are designed for the efficient data managements amongst the various sensor nodes deployed in an environment with maximum energy efficiency and to incur minimum connection errors [4]. To move in this line, various social insect colonies based WSN protocols are proposed in [5-6]. The main motivation of this paper is to design and implement various sensor network protocols based on Ant colonies and power aware routing protocols are proposed in the experimental testbed. A generalized framework for the wireless sensor network is shown in Fig. 1.

It can be seen from the Fig. 1 that the sensor nodes are deployed largely in a network for its low cost and can communicate with each other either directly or through other nodes and thus form an autonomous intelligent network. The information gathered by the sensor nodes must be transmitted to a control center called the Base Station (BS) either directly or through other sensor nodes. The base station is fixed and located far away from the sensors. The base station can then communicate with the end users either directly or through the existing wired network.

The rest of the paper is organized as follows. Section 2 discusses about the literature review in this area of research followed by the factors of the routing protocol design in Section 3. Section 4 discusses about our experimental testbed with various proposed routing protocols. The experimental results with discussion are provided in Section 5. Finally, we conclude with future scope in Section 6.

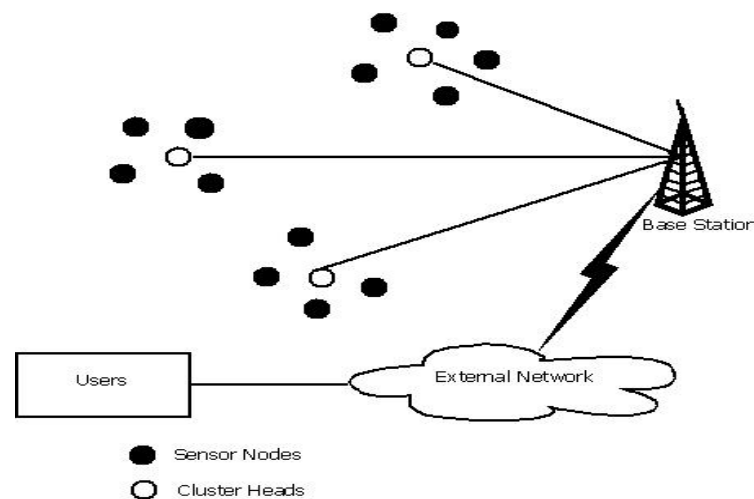


Fig. 1. Wireless sensor network architecture [7].

2. Literature Search

In this section, we provide a brief overview of the literature available in WSN research.

The authors have evaluated the performance of various routing protocols in NS-2 environment using AODV, DSR, DSDV, and TORA [8]. A modified routing algorithm for reducing congestion in wireless sensor network is proposed in [9]. In [10], the authors presented a novel routing protocol based on ant colony optimization to design a WSN and discuss its effectiveness to achieve a dynamic and adaptive routing in order to compensate the nodes power consumption and increase the network life time as far as possible. Performance evaluation of CSMA-MAC based WSN by considering various radio channels are discussed in [11]. The authors presented a cross layer design based self-optimized ant colony routing protocol for WSN in order to improve the overall data delivery ratio [12].

In [13], the authors analyze the performance of distributed energy efficient clustering protocol in context to network life time, and energy balancing. In [7], a new power aware, adaptive, hierarchical and chain based protocol (CCPAR) is proposed for ensuring the power dissipation evenly amongst all the nodes.

3. Design Factors for Routing Protocols

Since a distributed network has multiple nodes and services many messages, and each node is a shared resource, many decisions must be made. The following are some of the important factors affected by routing protocols that should be considered with great attention for an efficient WSN design.

3.1. Latency

Latency of a packet is a measure of the time delay of the packet to reach the base station (sink node) from its source node. For any sink, latency is obtained after arrival of n packets as $\sum_i \frac{d_i}{n}$, where d_i is the latency of the i^{th} packet and the latency of the network is then averaged by the total number of sinks. We use latency rather than the number of hops as the metric because of its relation not only with the number of hops traversed, but also with the length of the transmission queues and delays introduced randomly at the MAC layer including delays that is introduced to minimize the collision errors thereof.

3.2. Energy Consumption

It is defined as sum of energy of all nodes, where the energy used for a node is the sum total of the energy used for the communication, that includes transmitting, receiving and idling [14]. As sensor nodes are having the limited energy, routing strategies need to be processed dynamically for obtaining the highest efficiency of the sensor nodes.

3.3. Throughput

Throughput is used to measure the number of data packets received at the sink node per second [15]. This counts only the desired data packets for obtaining the effectiveness of the WSN model.

3.4. Scalability

Scalability depends upon the total number of sensor nodes that are deployed in a wireless sensor network, in terms of hundreds and thousands etc. Hence, it is desirable that the proposed routing algorithms must be scalable enough to respond all the events for efficient data handling in such a dense environment.

3.5. Quality of Service (QoS)

The quality of service is a measure of excellence while designing a particular application in terms of network life span, energy efficiency, collaborative processing and location awareness that are highly affected by the proper selection of the routing protocols [16].

3.6. Success Rate

The success rate is obtained by looking at the total number of packets received at all the destinations vs. the total number of packets sent from all the sources.

3.7. Loss Rate

It is defined as the number of lost packets vs. the total expected number of packets for that destination.

4. Methodologies and Experimental Setup

In this section, we discuss about the proposed routing protocols followed by the experimental set up for WSN design. We use swarm intelligence based routing protocols for WSN that falls under three categories. First one is Ant-Colony based (ACO) consists of SC-ant, FF-ant and FP-ant routing; secondly bee colony based (for example beesensor routing) and third one slim mold based.

4.1. Flooded Piggybacked Ant Routing (FP Routing)

Flooded piggybacked routing approach provides a new ant species to forward ants such as data ants carrying the forward list, where as control of the flooded forward ants are treated same as in case of flooded forward ant routing [17]. This is found suitable in designing a complex, dynamic and highly distributed wireless sensor network. Single path routing tends to have high loss rates, due to dynamic and asymmetric properties of sensor networks. Multi-path routing such as flooding is very robust and has high success rate. In FP, we combine forward ants and data ants, using constrained flooding in the previous algorithm to route the data and to discover good paths at the same time.

4.2. MCBR Tree Routing

The term MCBR is used to indicate the term message-initiated Constrained based Routing for routing mechanism with constraint-based destinations and objectives specified in messages [18]. One advantage of the MCBR routing is its accurate initial objective estimate based on its specifications. The objective functions are used to estimate the minimum cost along the path, while the destination constraints are basically used to estimate the minimum number of hops to the destinations. With the separation of routing specification from routing strategies, general purpose Meta routing strategies can be thought of for MCBR routing tree implementation with QoS support, in comparison to the most existing ad-hoc routing strategies, which do not support QoS to their account.

4.3. Sensor-driven and Cost-aware Ant Routing (SC)

One of the problems of the basic ant-routing algorithm is that the forward ants normally take a long time to find the destination, even when a Tabu list is used (i.e., no repeating nodes if possible). That happens because ants initially have no idea where the destination is. Only after one ant finds the destination and traverses back along the links will the link probabilities of those links change. In SC, we assume that ants have sensors so that they can smell where the food is even at the beginning [19]. That is not an unrealistic assumption for sensor networks, since feature-based routing dominates address-based routing in that space. Some features, such as geographic location, have a natural potential. If the destination does not have a clear hint, pre-building the feature potential is sometimes

still efficient. Cost awareness generalizes the objective of shortest path length so that ants can apply other routing metrics as well, e.g., energy-aware routing.

4.4. AODV Routing

The AODV (Adhoc on-demand distance vector routing) [20] is a reactive routing protocol, where routes are determined only on demand. AODV avoids problems similar to count-to-infinity. For this, AODV uses a technique of assigning sequence numbers to all the updates. AODV is also found suitable in restrictive environments because of its ability to intercommunicate with the end points which cannot be accessed directly. It finds the route through which the message can be forwarded and also find the shortest path to the end point.

4.5. Experimental Setup

We implemented several routing protocols simulation using Prowler [21] and Rmase [22] in MATLAB 7.0 environment to evaluate the performance of the wireless sensor network.

In this, we used a square sensor field of 10 x 10 square unit areas. Initially, all the nodes are placed in a grid placed uniformly, where the coordinates of each node were shifted by a uniform random distribution with range [-0.5, +0.5]. In this, a node which is closest to the center of the sensor field was referred to as the base station.

4.6. Radio Channel Modeling

The radio model used by Prowler provides a radio propagation model with CSMA –MAC protocol using MICA motes. In this, we use a simple deterministic radio channel, where a packet is received successfully only when the received signal strength is greater than a pre-defined threshold limit. In situations, when two simultaneous transmission are received with signal strength satisfy the above conditions at one node of consideration, collision occurs. A packet is lost only when there is some collision occurs. In all our simulations, the data rate of wireless links is set to be 40 Kbps with maximum length of a packet as 960 bits.

4.6.1. Propagation and Fading Models

The current implementation uses a basic model for radio propagation with two different fading models. In both cases the signal propagation is modeled by an ideal propagation function, and disturbing components. The ideal propagation function defines the signal strength vs. the distance between the transmitter and receiver. The disturbance components model the fading effect. The $f(x)$ is the ideal propagation function. The ideal received signal strength is $P_{rec_id} = P_{transmit} * f(x)$, where x is the distance.

4.6.2. Fading Model 1 (Line of Sight)

This model describes scenarios where the motes have direct line of sight. The fading is modeled by adding noise components to the ideal received signal strength .The received signal strength is: $P_{rec} = P_{rec_id} * (1 + \alpha(x)) * (1 + \beta(t))$, where α and β are random variables with normal distributions $N(0, s_{\alpha})$ and $N(0, s_{\beta})$, respectively. Here, P_{rec} is forced to be non-negative. In

this, alpha models location-dependent effects, while beta models time-dependent effects. The magnitude of the fading effect modeled by alpha remains constant during the simulation (unless location of the node changes, when it is recalculated), while the magnitude of the effect modeled by beta changes in time.

4.6.3. Fading Model 2 (Rayleigh Fading)

This model describes scenarios where the nodes do not have direct line of sight. The fading is modeled by randomly modulating P_{rec_id} : $P_{rec} = P_{rec_id} * R$, where R is a random variable with exponential distribution (mean = 1). There is a consistency time parameter (τ) defining the time while the fading can be considered constant. P_{rec} is recalculated for every transmitter node in every τ time period. If the position of a node changes, the corresponding P_{rec} values are recalculated. An additional transmission error p_error is defined for both models. It models all other sources/effects that may lead to an unsuccessful transmission.

4.6.4. Radio Channel Models

The simulator contains two different models to describe radio transmissions, receptions, and collision avoidance.

Channel Model 1 (simple)

This simple model is fast, although not very accurate. Transmitters check the channel before starting transmission. The channel is considered idle if $MRP < RECEPTION_LIMIT$, where MRP is the maximum received power at the time of the idle check.

Channel Model 2 (more detailed)

This model provides more accurate results at a somewhat slower speed. The Signal to Noise and Interference Ratio (SINR) is defined by $SINR = P_{rec} / (P_{noise} + P_{int})$, where P_{rec} is the power of the received (useful) signal, P_{noise} is the receiver's noise variance (RNV), and P_{int} is the total (summed) interference from all the undesired transmitters. The signal is successfully received if $SINR > SINR_LIMIT$, during the time of the reception. Transmitters check the channel before starting transmission. The channel is considered idle if $TRP < P_{noise} * IDLE_LIMIT_CONSTANT$, where TRP is the total received power (TRP) at the time of the idle check.


5. Experimental Results and Discussion

We perform all our simulations with a simulation time of 50 seconds. The radio connectivity obtained from different routing protocols and radio channel under our investigation are presented in Fig. 3 below, in order to have an understanding about the simulation environment. Fig. 2 (a) shows the radio connectivity for MCBR ant routing with Rayleigh fading followed by the MCBR ant routing with SINR in Fig. 2 (b). Further, Fig. 2 (c) and Fig. 2 (d) presents the radio connectivity scenario for FP based ant routing with SINR and Rayleigh fading taken into consideration.

Various performance evaluations such as Latency, energy and throughput with respect to simulation time in seconds for the proposed routing protocols are obtained and presented in Fig. 3, Fig. 4, and Fig. 5 respectively. From Fig. 3(a), it can be observed that MCBR tree routing provides better latency in comparison to others; where as in all other case as is evident from Fig. 3 (b) and Fig. 3 (c) that Flooded piggybacked routing (FP) performs better and AODV routing is at the bottom, need some enhancement for a suitable WSN design.




(a) Radio connectivity for SC-MCBB Ant routing with Rayleigh Fading.

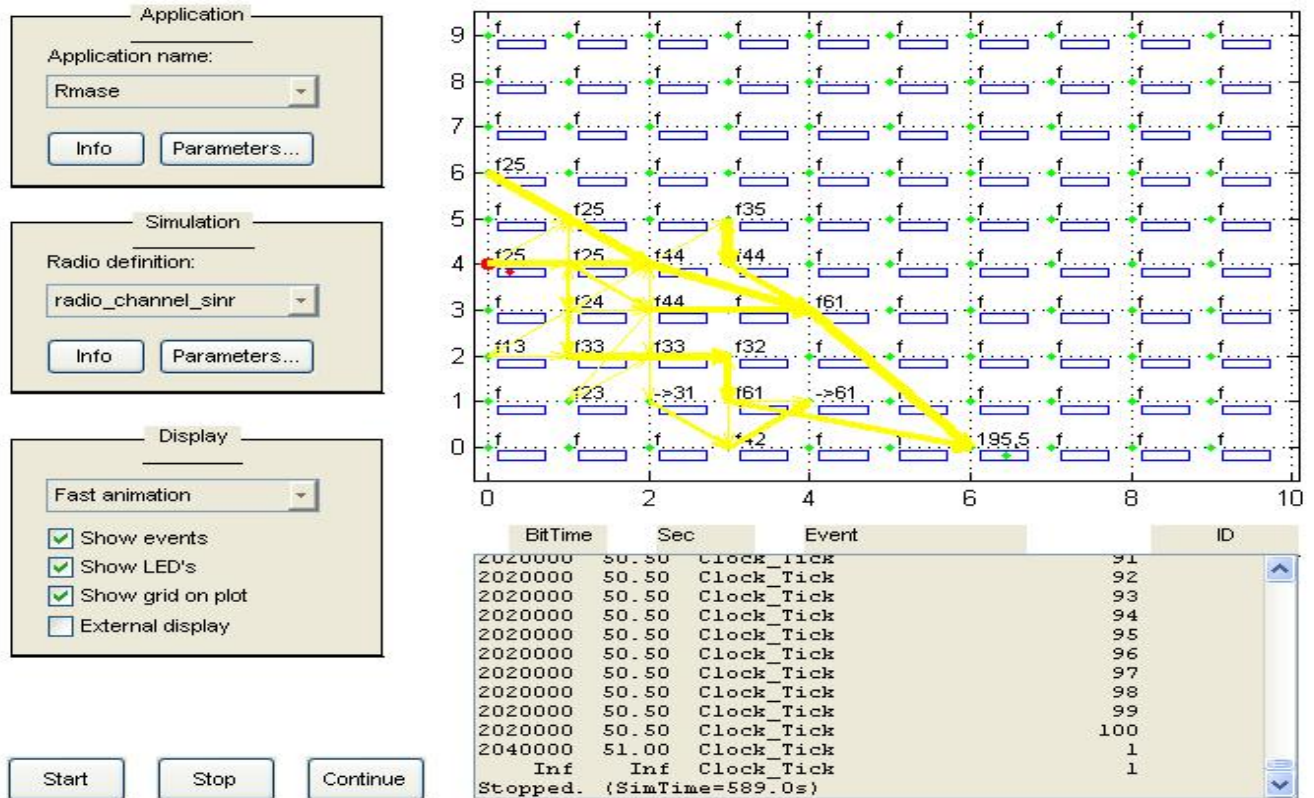


(b) Radio connectivity for SC-MCBB Ant routing with SINR.

Fig. 2 (a-b). Instances of radio connectivity for swarm based routing with fading.

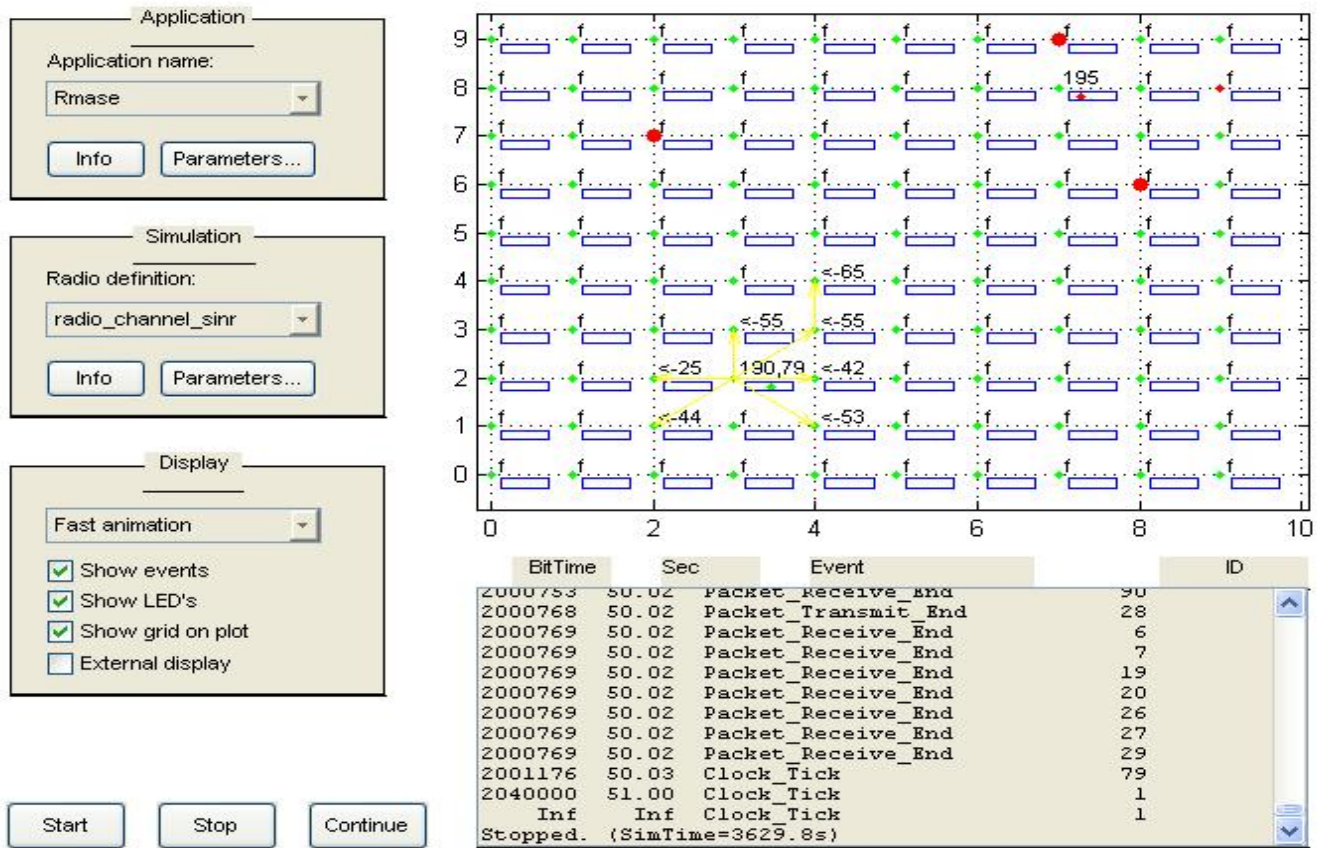


(c) Radio connectivity for FP Ant routing with SINR.

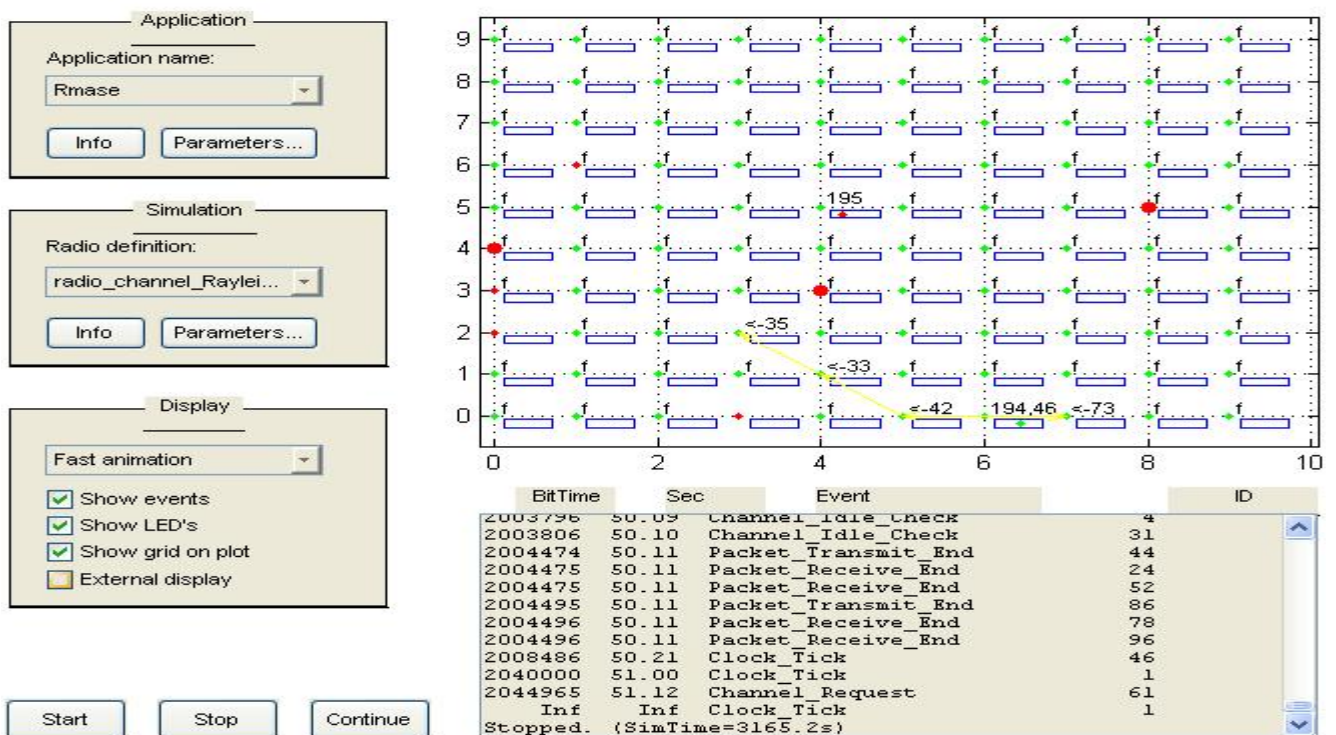

(d) Radio connectivity for FP Ant routing with Rayleigh Fading.


Fig. 2 (c-d). Instances of radio connectivity for swarm based routing with fading.

Wireless Sensor Network Simulation -1

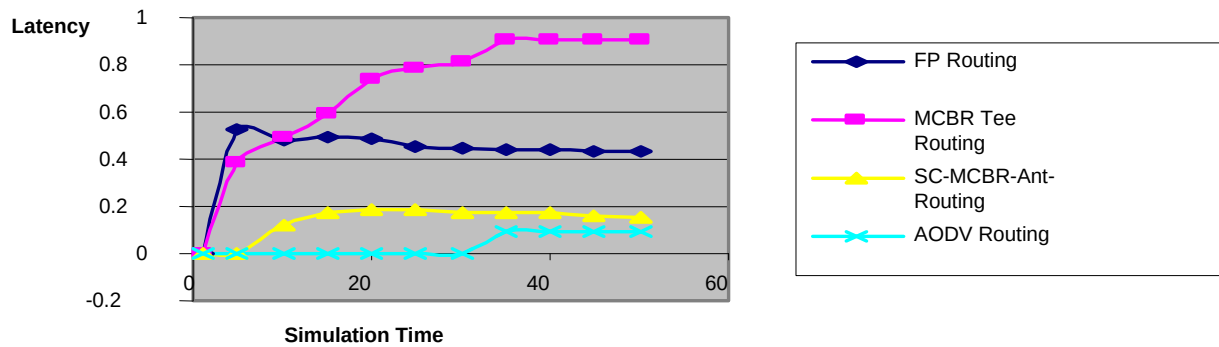


(a) Comparison of latency.

Wireless Sensor Network Simulation-2

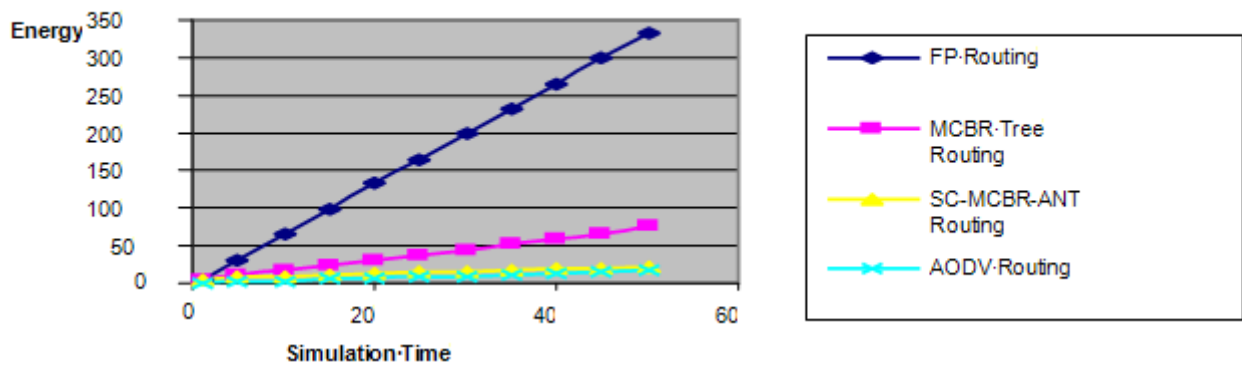

(b) Energy consumption comparison.

Wireless Sensor Network Simulation-3'

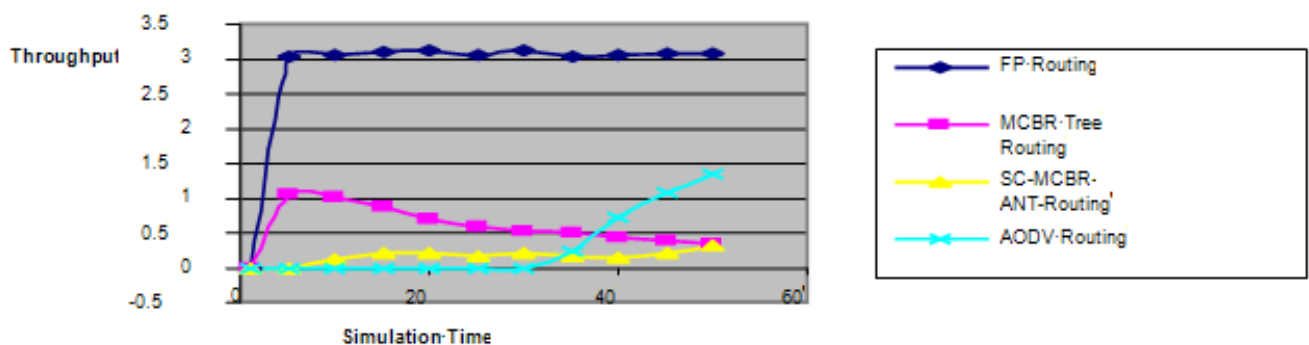

(c) Throughput Analysis.

Fig. 3. Comparison of different routing algorithms in case of a normal radio channel.

From Fig. 4, it can be observed that MCBR tree with Rayleigh fading has high latency in comparison to categories. It suddenly rises from zero to 1.0256 and then reduced to 0.751 for many and then finally settled at 0.7719 seconds. However, in case of MCBR ant routing with SINR, the constant latency achieved.

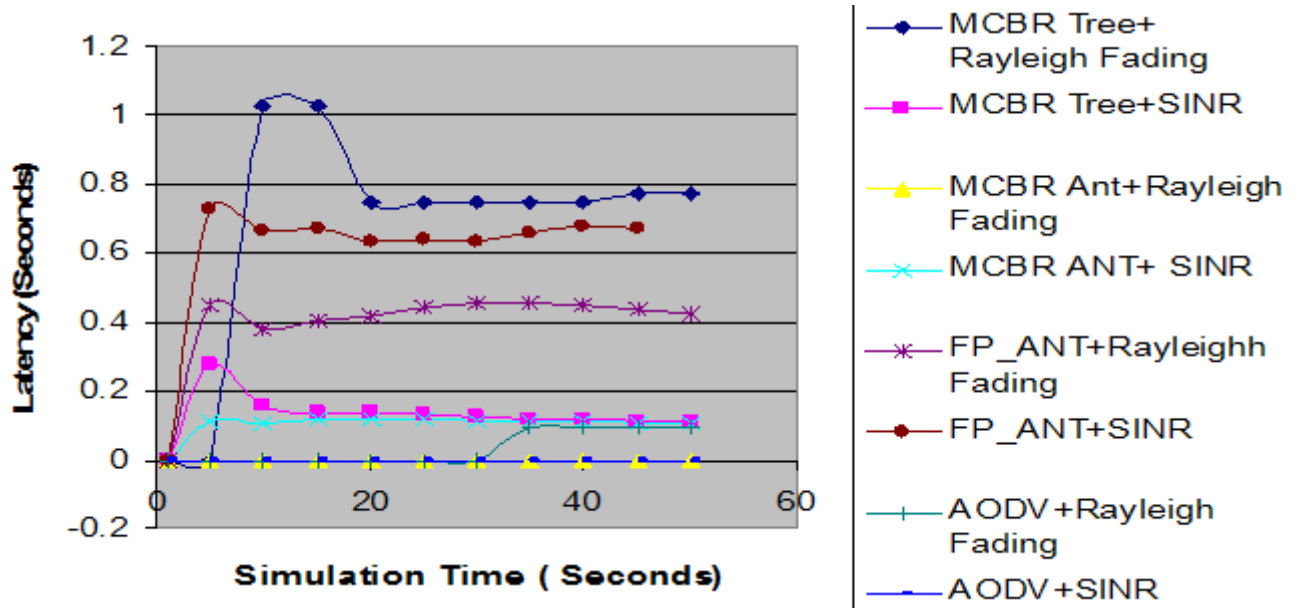


Fig. 4. Latency comparison in channel fading environment.

It is quite evident from Fig. 5 that MCBR ant routing with Rayleigh fading consumes more energy in Joules per packet in comparison to all other types. It consumes 3.456 joules per packet initially and then finally consumes 48.864 joules per packet at the simulation time of 50 seconds. However, AODV routing with Rayleigh fading and with SINR provides lowest energy consumption varying from 0 joules per packet to 15.072 and 11.88 joules per packet respectively.

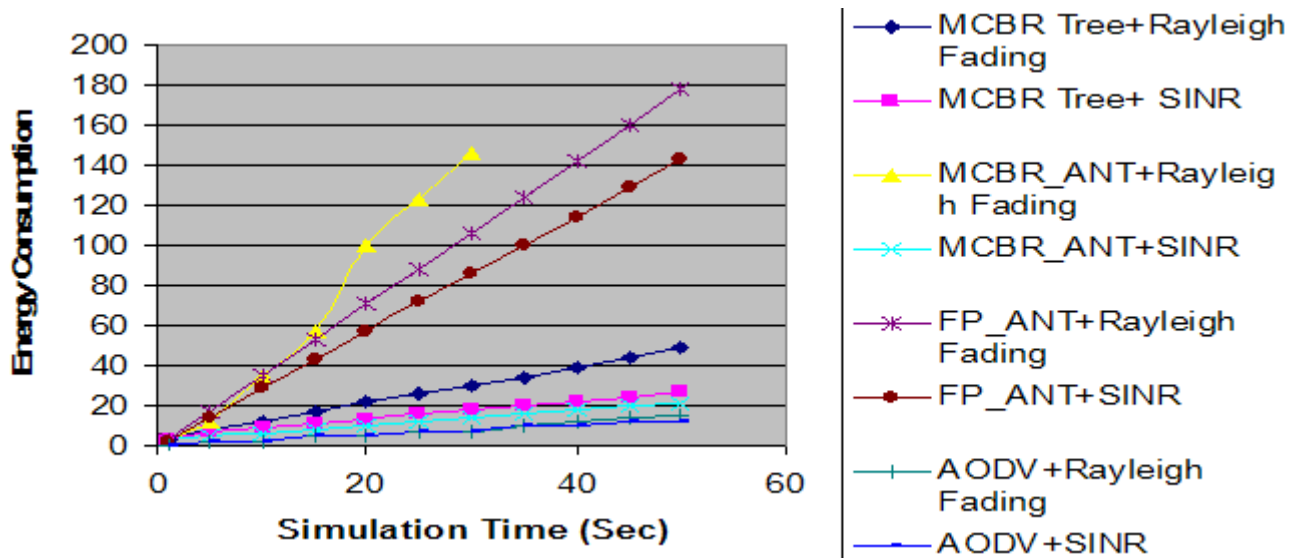


Fig. 5. Energy consumption.

Fig. 6 shows that in case of MCBR ant routing with Rayleigh fading, throughput remains unchanged throughout the simulation period, whereas on case of MCBR tree with SINR, it rises from 0 to 2.9467 data packets per seconds. The FP ant routing with both Rayleigh fading and SINR cases, provides better throughput finally of 1.5529 and 1.1874 respectively.

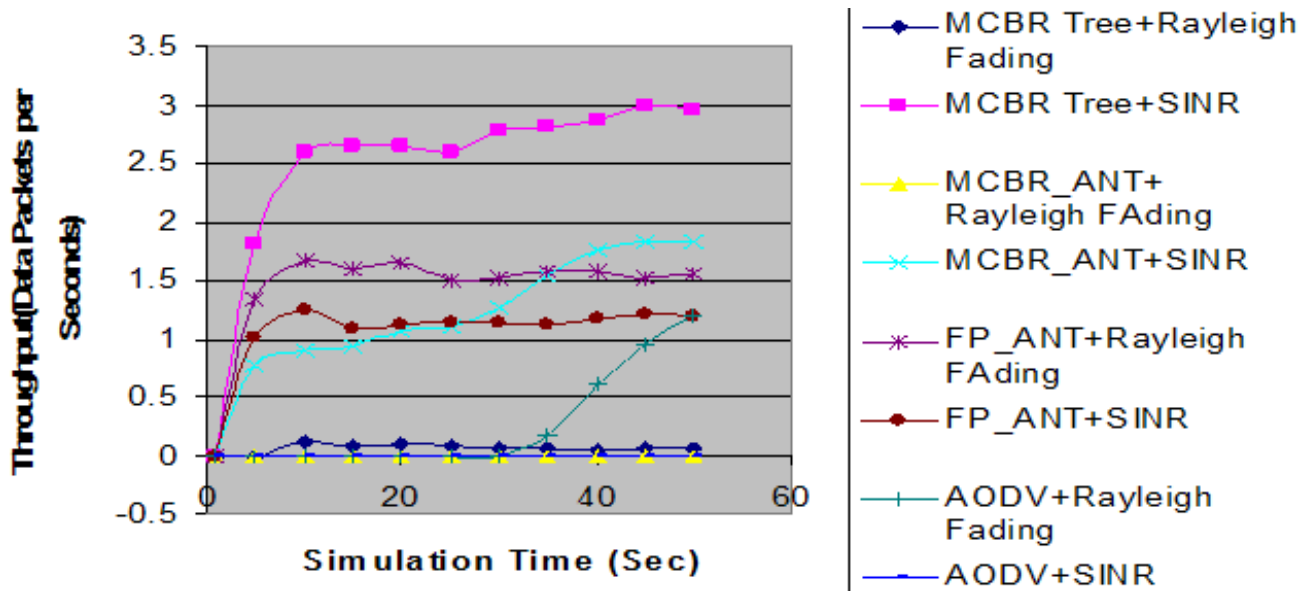


Fig. 6. Throughput.

As can be seen from Fig. 7, loss rate in case of MCBR tree with Rayleigh fading is high, ranges from 0 to 0.9807 through 0.9718. However, in case of MCBR ant routing with Rayleigh fading and AODV routing with SINR maintains the constant loss rate. FP ant routing with Rayleigh fading and SINR provides loss rate ranging from 0 to 0.610 and 0 to 0.696 respectively.

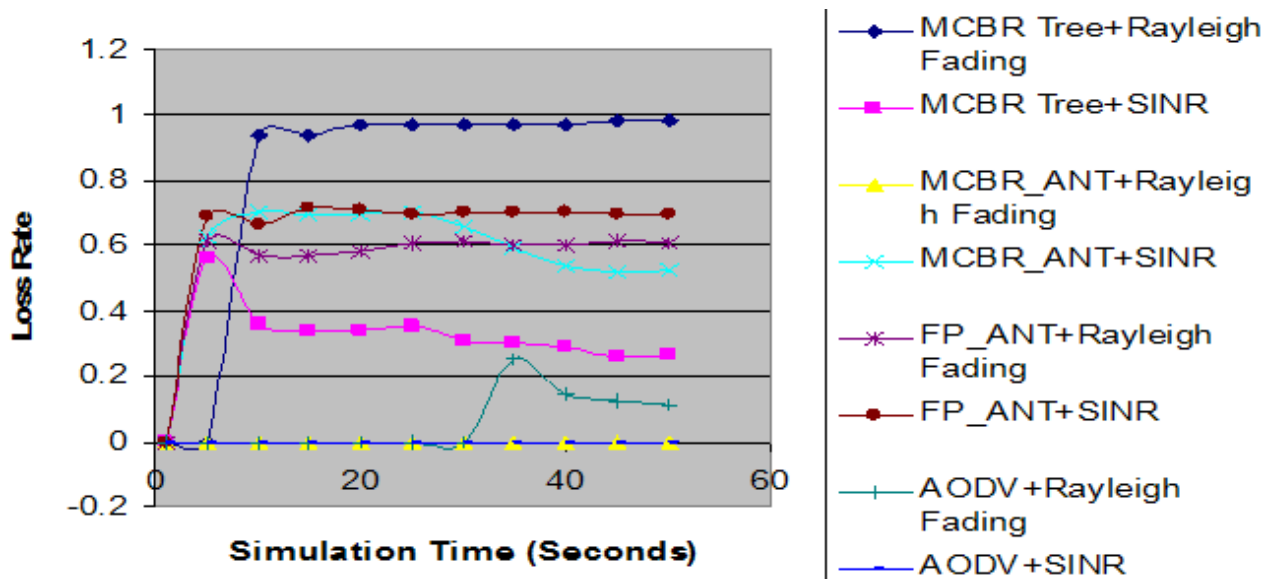


Fig. 7. Loss rate.

The success rate for MCBR tree with SINR is the highest among all ranging starting 0 to 0.7347 finally, as can be seen from Fig. 8. Further, this shows that AODV with SINR and MCBR ant routing with Rayleigh fading provides the constant success rate. In this case, FP ant routing with Rayleigh fading rises from 0 to 0.4167 and then finally settled at 0.3877. Similarly FP ant routing with SINR provides success rate varying from 0 during first simulation time to 0.301 at 45th simulation time and finally at 0.296 in 50th simulation time.

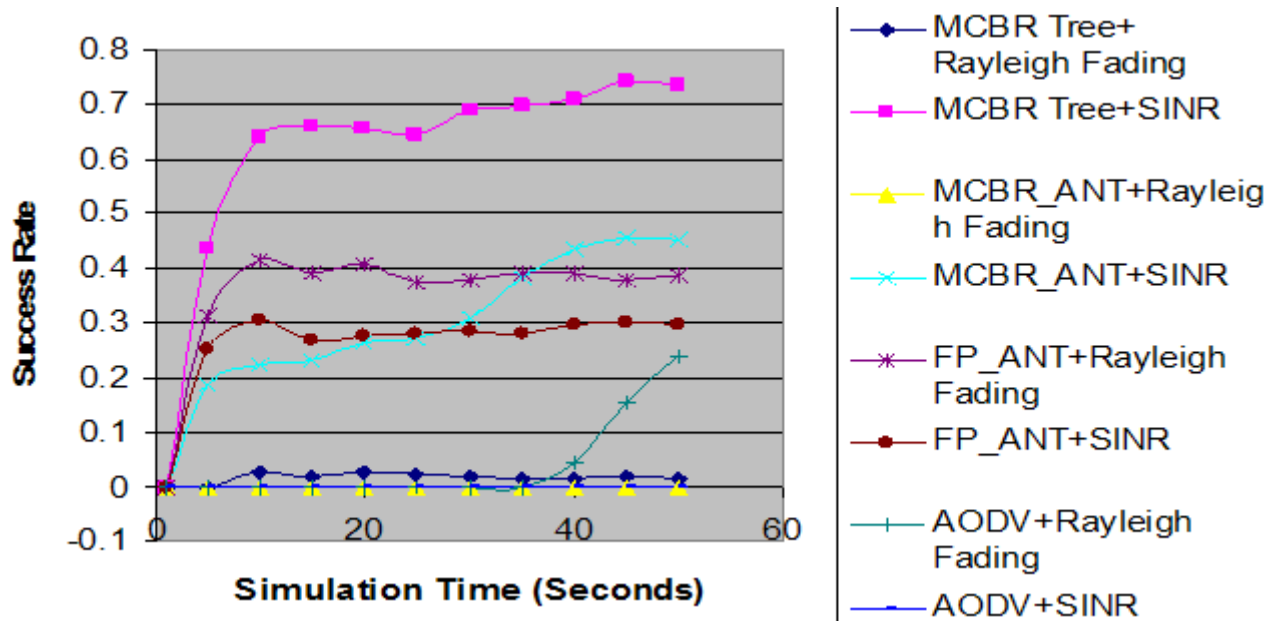


Fig. 8. Success rate.

5. Conclusion and Future Scope

Wireless sensor networks are an emerging area of research that finds many applications in every walk of life. Researches are going on to either developing the new or enhance the existing technologies for making the WSN application more viable to the people. However, before implementation and actual production, all these techniques are to be properly tested and verified. As the real world implementation and test-beds are some what difficult to obtain, the modeling and simulation is the only solution to achieve such a WSN design.

In this paper, we have concentrated on to implement various routing protocols based on ant routing and power aware routing in order to model an efficient wireless sensor network in terms of their latency, energy consumption, throughput, loss rate and success rate. Through the simulation experiments conducted in this research, we conclude that in case of normal radio channel, power aware routing MCBR tree is better in case of latency comparison to ant based routing where as in case of the other scenarios; the reverse has been true for designing a WSN. Similarly, while considering radio channels with Rayleigh fading and SINR for WSN design, MCBR tree with Rayleigh fading provides high latency, MCBR ant routing with Rayleigh fading consumes more energy, MCBR tree with SINR with highest throughput, loss rate in case of MCBR tree with Rayleigh fading is high and finally MCBR tree with SINR has the highest success rate, in comparison to all others. Our future work is to define some new protocols for efficient WSN design and then to formulate an anomaly detection framework.

References

- [1]. K. Akkaya and M. Younis, A survey of routing protocols in wireless sensor networks, *Ad Hoc Networks*, 2005, pp. 325-349.
- [2]. Akylidiz, W. Su, S. Subramaniam, and E. Cayirci, A survey on sensor networks, *IEEE Communication Magazine*, Vol. 40, No. 8, August 2002, pp. 102-114.
- [3]. B. Warnke, K. S. J. Pister, MEMS for distributed wireless sensor networks, in *Proc. of the 9th Intl. Conf. on electronics, circuits and systems*, Dubrovnik, Croatia, September 2002.

- [4]. S. Okdem, K. Dervis, routing in wireless sensor networks using an ant colony optimization router chip, *Sensors*, Vol. 9, No. 2, 2009, pp. 909-921.
- [5]. K. Saleem, N. Fisal, S. hafizah, S. Kamilah, and R. A. Rashid, A self optimized multipath routing protocol, *International Journal of Recent Trends in Engineering*, Vol. 2, No. 1, November 2009.
- [6]. G. Di Caro, Ant colonies for adaptive routing in packet switched telephone networks, In: *parallel problem solving from nature-PPSN, Lecture notes in computer science*, Vol. 1498, 1998, pp. 673-682.
- [7]. K. Majumdar and S. K. Subir, Cluster chain based power aware routing (CCPAR) scheme for wireless sensor network, *International Journal of Computer Science and Engineering*, Vol. 2, No. 9, 2010, pp. 2953-2963.
- [8]. F. Ullah, M. Amin, and H. ul Ghaffar, Simulating AODV and DSDV for adynamic wireless sensor networks, *International Journal of Computer Science and Security*, Vol. 10, No. 7, July 2010, pp. 219-223.
- [9]. N. Sengottaiyan, Rm Somasundaram and S. Arumugan, A modified routing algorithm for reducing congestion in wireless sensor networks, *European Journal of Scientific Research*, Vol. 35, No. 4, 2009, pp. 529-536.
- [10]. X. Hui, Z Zhi-Gang and N. Feng, A novel routing protocol in wireless sensor network based on ant colony optimization, *International Journal of Intelligent Information Technology Application*, Vol. 3, No. 1, 2010, pp. 1-5.
- [11]. M. Panda and M. R. Patra, Modelling CSMA-Mac based radio channel for wireless sensor network, *International Journal of Computer Applications*, 2010.
- [12]. K. Saleem, N. Fisal, M. A. Baharudin, A. Ali Ahmed, S. Hafizah and S. Kamilah, Ant colony inspired self-optimized routing protocol based on crosslayer architecture for wireless sensor networks, *WSEAS Transactions on Communications*, Vol. 9, No. 10, 2010, pp. 669-678.
- [13]. R. Meelu and R. Anand, Performance evaluation of cluster based routing protocols used in heterogeneous wireless sensor networks, *International Journal of Information Technology and Decision Making*, Vol. 4, No. 1, 2011, pp. 227-231.
- [14]. K. Konstantinos, X. Apostolos and K. Panagiotis, Topology optimization in Wireless Sensor Network for precision agriculture, in *Proc. of the IEEE International Conference on Sensor Technologies and Applications*, 2007, pp. 526-530.
- [15]. S. Gandham, Y. Zhang and Q. Huang, Distributed time-optimal scheduling for convergecast in wireless sensor networks, *Computer Network*, Vol. 52, 2008, pp. 610-629.
- [16]. J. N. Al-Karaki and A. E. Kamal, Routing techniques in wireless sensor networks-A Survey, *IEEE Wireless Communications*, Vol. 11, 2004, pp. 6-28.
- [17]. Y. Zhang, L. D. Kuhn and MPJ Fromherz, Improvements on Antrouting for sensor networks, Ant colony optimization and swarm intelligence, *Lecture Notes in Computer Science*, Vol. 3172, 2004, pp. 89-313.
- [18]. Y. Zhang and M. Fromherz, Message initiated constrained based routing for wireless adhoc sensor networks, in *Proc. of the IEEE Consumer Communication and Networking Conference*, 2004.
- [19]. M. Younis, P. Munshi, G. Gupta and S. M. Elsharkawy, On efficient clustering of wireless sensor networks, in *Proceedings of the IEEE Workshop on Dependability and Security in Sensor Networks and Systems*, 2006, pp. 78-91.
- [20]. C.-K. Toh, Maximum battery life routing to support ubiquitous mobile computing in wireless sensor networks, *IEEE Communication Magazine*, Vol. 39, No. 6, 2001, pp. 138-147.
- [21]. G. Simon, Probabilistic wireless sensor network simulator, <http://www.isis.vanderbilt.edu/projects/nest/prowler/>
- [22]. Y. Zhang, M. Farmherz, L. Kuhn, Rmase: routing modelling application simulation environment, <http://www.parc.com/era/nest/Rmase/>

Authors are encouraged to submit article in MS Word (doc) and Acrobat (pdf) formats by e-mail: editor@sensorsportal.com
Please visit journal's webpage with preparation instructions: <http://www.sensorsportal.com/HTML/DIGEST/Submission.htm>

International Frequency Sensor Association (IFSA).

Call for Books Proposals

Sensors, MEMS, Measuring instrumentation, etc.

International Frequency Sensor Association Publishing



Benefits and rewards of being an IFSA author:

1) Royalties.

Today IFSA offers most high royalty in the world: you will receive 50 % of each book sold in comparison with 8-11 % from other publishers, and get payment on monthly basis compared with other publishers' yearly basis.

2) Quick Publication.

IFSA recognizes the value to our customers of timely information, so we produce your book quickly: 2 months publishing schedule compared with other publishers' 5-18-month schedule.

3) The Best Targeted Marketing and Promotion.

As a leading online publisher in sensors related fields, IFSA and its Sensors Web Portal has a great expertise and experience to market and promote your book worldwide. An extensive marketing plan will be developed for each new book, including intensive promotions in IFSA's media: journal, magazine, newsletter and online bookstore at Sensors Web Portal.

4) Published Format: pdf (Acrobat).

When you publish with IFSA your book will never go out of print and can be delivered to customers in a few minutes.

You are invited kindly to share in the benefits of being an IFSA author and to submit your book proposal or/and a sample chapter for review by e-mail to editor@sensorsportal.com. These proposals may include technical references, application engineering handbooks, monographs, guides and textbooks. Also edited survey books, state-of-the art or state-of-the-technology, are of interest to us.

Mobile Advertising Solutions for Sensor Industry: How to reach 80,000+ addressable mobile audiences?



An industry first Smartphone mobile advertising solution for sensors manufacturers and distributors



50% OFF
for limited time interval



Create your account today and use a **discount coupon code ls10001** to start advertising your sensors now:

https://www.lesensor.com/sensor/Profiles/CreateNewAccount.aspx?sensor_portal=ls10001

MEMS & Sensors for Smartphones


TECHNOLOGY & MARKET REPORT - JULY 2010

**IFSA offers
a SPECIAL PRICE**

Report provides:

- market data on MEMS & sensors for mobile phones: key market metrics & dynamics
- application focus on key sensors that are changing the mobile phone industry: new features, technical roadmap, insight about future technology trends & challenges
- a deep understanding of MEMS & sensors value chain, infrastructure & players for the handset business

http://www.sensorsportal.com/HTML/MEMS_and_Sensors_for_smartphones.htm

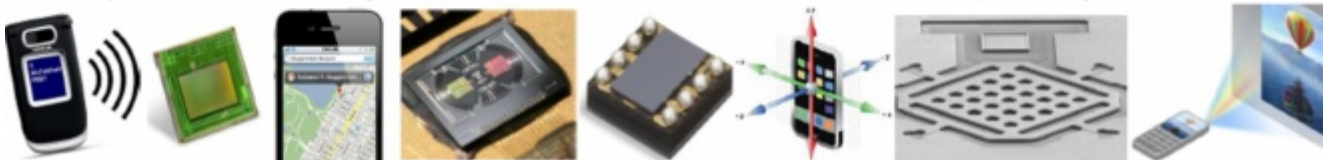

Uncooled Infrared Cameras and Detectors Thermography and Vision Markets 2010 – 2015

**IFSA offers
a SPECIAL PRICE**

MEMS Micro-Bolometers Drive Growth

This report provides market data on both camera and detector; IR camera supply chain levels and main technological trends for detector/microbolometer.

http://www.sensorsportal.com/HTML/Detectors_for_Thermography.htm




CMOS Image Sensors Technologies & Markets - 2010 Report

**Disruptive technologies are paving the way
to the future of digital imaging industry !**

**IFSA offers
a SPECIAL PRICE**

Image sensors have come a long way since the first introduction of CCD sensor technology in the 1990's. They made a big jump in the 2000's with the introduction of CMOS sensor technology which gave birth to the low-cost, high volume camera phone market. Image sensors are now part of our everyday life: from cell-phone cameras, to notebook webcams, digital cameras, video camcorders to security & surveillance systems. In the future, new markets are also emerging such as sensors for medical applications, automotive security features, but also gaming and home TV webcams ... The reason why we are now releasing our first report on the CMOS image sensor industry is that we feel that we are at an historic turning point for this young, but still maturing industry.

http://www.sensorsportal.com/HTML/CMOS_Image_Sensors.htm

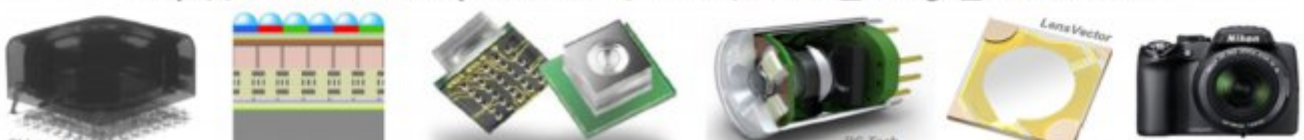

Guide for Contributors

Aims and Scope

Sensors & Transducers Journal (ISSN 1726-5479) provides an advanced forum for the science and technology of physical, chemical sensors and biosensors. It publishes state-of-the-art reviews, regular research and application specific papers, short notes, letters to Editor and sensors related books reviews as well as academic, practical and commercial information of interest to its readership. Because of it is a peer reviewed international journal, papers rapidly published in *Sensors & Transducers Journal* will receive a very high publicity. The journal is published monthly as twelve issues per year by International Frequency Sensor Association (IFSA). In addition, some special sponsored and conference issues published annually. *Sensors & Transducers Journal* is indexed and abstracted very quickly by Chemical Abstracts, IndexCopernicus Journals Master List, Open J-Gate, Google Scholar, etc. Since 2011 the journal is covered and indexed (including a Scopus, Embase, Engineering Village and Reaxys) in Elsevier products.

Topics Covered

Contributions are invited on all aspects of research, development and application of the science and technology of sensors, transducers and sensor instrumentations. Topics include, but are not restricted to:

- Physical, chemical and biosensors;
- Digital, frequency, period, duty-cycle, time interval, PWM, pulse number output sensors and transducers;
- Theory, principles, effects, design, standardization and modeling;
- Smart sensors and systems;
- Sensor instrumentation;
- Virtual instruments;
- Sensors interfaces, buses and networks;
- Signal processing;
- Frequency (period, duty-cycle)-to-digital converters, ADC;
- Technologies and materials;
- Nanosensors;
- Microsystems;
- Applications.

Submission of papers

Articles should be written in English. Authors are invited to submit by e-mail editor@sensorsportal.com 8-14 pages article (including abstract, illustrations (color or grayscale), photos and references) in both: MS Word (doc) and Acrobat (pdf) formats. Detailed preparation instructions, paper example and template of manuscript are available from the journal's webpage: <http://www.sensorsportal.com/HTML/DIGEST/Submission.htm> Authors must follow the instructions strictly when submitting their manuscripts.

Advertising Information

Advertising orders and enquires may be sent to sales@sensorsportal.com Please download also our media kit: http://www.sensorsportal.com/DOWNLOADS/Media_Kit_2011.pdf

The Handbook of Laboratory Measurements and Instrumentation presents experimental and laboratory activities with an approach as close as possible to reality, even offering remote access to experiments, providing to the reader an excellent tool for learning laboratory techniques and methodologies. Book includes dozens videos, animations and simulations following each of chapters. It makes the title very valued and different from existing books on measurements and instrumentation.



This unique methodological book comprises 13 chapters. Each one presents a clearly defined learning objective, the essential concepts and a step-by-step guide for performing the experimental activity, various complementary multimedia contents and a final synthesis. The set of open questions that closes each module is intended to provide formative assessment.

The Handbook of Laboratory Measurements and Instrumentation significantly contributes to the dissemination of experimental activity in engineering education and to facilitate the conception, tuning and exploration of experimental systems for laboratory training. The full technical description of the equipment is provided to make the setups easily reproducible. Engineers, technicians and students who are working in measuring laboratories will find plenty of practical information here for solving daily problems.

Order online:

http://www.sensorsportal.com/HTML/BOOKSTORE/Handbook_of_Measurements.htm



www.sensorsportal.com