


ISSN 1726-5479

# SENSORS & TRANSDUCERS

# 11

vol. 16  
Special  
/12

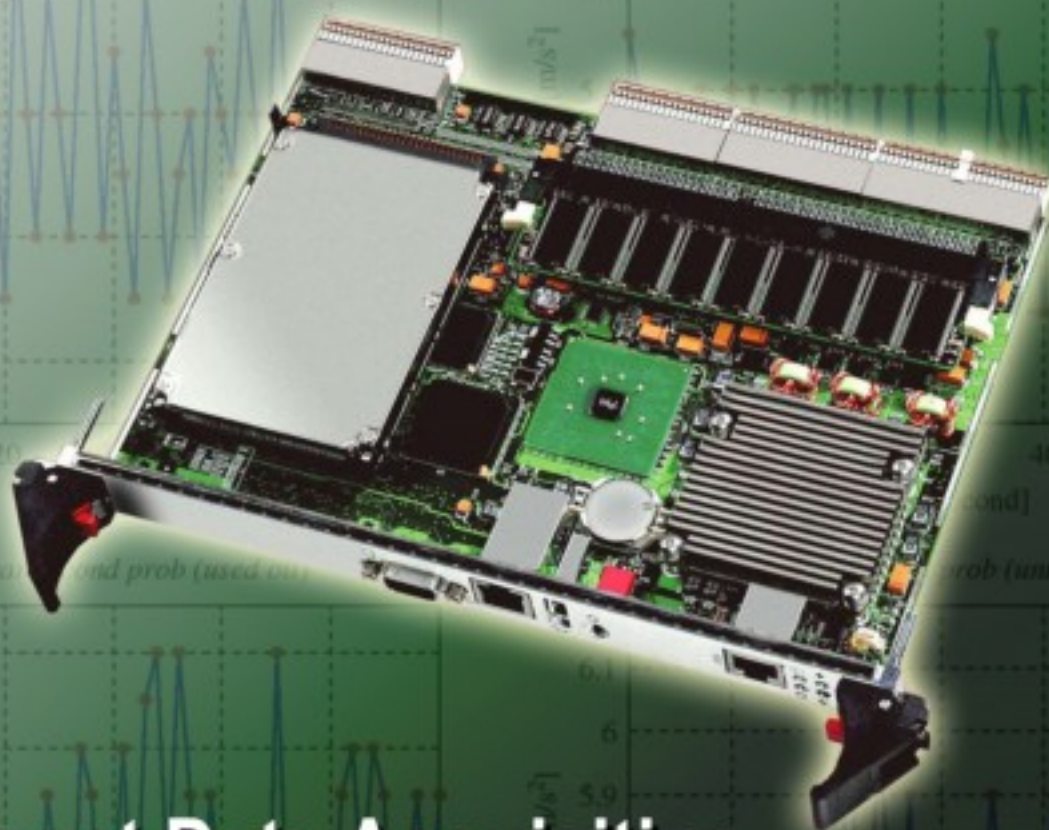

**Intelligent Data Acquisition  
and Information Process Technologies  
and Their Applications**

International Frequency Sensor Association Publishing



**Guest Editors:** Gongfa Li, Tinggui Chen and Hegen Xiong

**Editors for Western Europe**

Meijer, Gerard C.M., Delft University of Technology, The Netherlands  
Ferrari, Vittorio, Università di Brescia, Italy

**Editors for North America**

Datskos, Panos G., Oak Ridge National Laboratory, USA  
Fabien, J. Josse, Marquette University, USA  
Katz, Evgeny, Clarkson University, USA

**Editor South America**

Costa-Felix, Rodrigo, Inmetro, Brazil

**Editor for Eastern Europe**

Sachenko, Anatoly, Ternopil State Economic University, Ukraine

**Editor for Asia**

Ohyama, Shinji, Tokyo Institute of Technology, Japan

**Editor for Africa**

Maki K.Habib, American University in Cairo, Egypt

**Editor for Asia-Pacific**

Mukhopadhyay, Subhas, Massey University, New Zealand

## Editorial Advisory Board

- Abdul Rahim, Ruzairi, Universiti Teknologi, Malaysia  
Ahmad, Mohd Noor, Northern University of Engineering, Malaysia  
Annamalai, Karthikeyan, National Institute of Advanced Industrial Science and Technology, Japan  
Arcega, Francisco, University of Zaragoza, Spain  
Arguel, Philippe, CNRS, France  
Ahn, Jae-Pyoung, Korea Institute of Science and Technology, Korea  
Arndt, Michael, Robert Bosch GmbH, Germany  
Ascoli, Giorgio, George Mason University, USA  
Atalay, Selcuk, Inonu University, Turkey  
Atghiaee, Ahmad, University of Tehran, Iran  
Augutis, Vygtantas, Kaunas University of Technology, Lithuania  
Avachit, Patil Lalchand, North Maharashtra University, India  
Ayes, Aladdin, De Montfort University, UK  
Azamimi, Azian binti Abdullah, Universiti Malaysia Perlis, Malaysia  
Bahreini, Behraad, University of Manitoba, Canada  
Baliga, Shankar, B., General Motors Transnational, USA  
Baoxian, Ye, Zhengzhou University, China  
Barford, Lee, Agilent Laboratories, USA  
Barlingay, Ravindra, RF Arrays Systems, India  
Basu, Sukumar, Jadavpur University, India  
Beck, Stephen, University of Sheffield, UK  
Ben Bouzid, Sihem, Institut National de Recherche Scientifique, Tunisia  
Benachiba, Chellali, Université de Bechar, Algeria  
Binnie, T. David, Napier University, UK  
Bischoff, Gerlinde, Inst. Analytical Chemistry, Germany  
Bodas, Dhananjay, IMTEK, Germany  
Borges Carval, Nuno, Universidade de Aveiro, Portugal  
Bouchikhi, Benachir, University Moulay Ismail, Morocco  
Bousbia-Salah, Mounir, University of Annaba, Algeria  
Bouvet, Marcel, CNRS – UPMC, France  
Brudzewski, Kazimierz, Warsaw University of Technology, Poland  
Cai, Chenxin, Nanjing Normal University, China  
Cai, Qingyun, Hunan University, China  
Calvo-Gallego, Jaime, Universidad de Salamanca, Spain  
Campanella, Luigi, University La Sapienza, Italy  
Carvalho, Vitor, Minho University, Portugal  
Cecelja, Franjo, Brunel University, London, UK  
Cerdà Belmonte, Judith, Imperial College London, UK  
Chakrabarty, Chandan Kumar, Universiti Tenaga Nasional, Malaysia  
Chakravorty, Dipankar, Association for the Cultivation of Science, India  
Changhai, Ru, Harbin Engineering University, China  
Chaudhari, Gajanan, Shri Shivaji Science College, India  
Chavali, Murthy, N.I. Center for Higher Education, (N.I. University), India  
Chen, Jiming, Zhejiang University, China  
Chen, Rongshun, National Tsing Hua University, Taiwan  
Cheng, Kuo-Sheng, National Cheng Kung University, Taiwan  
Chiang, Jeffrey (Cheng-Ta), Industrial Technol. Research Institute, Taiwan  
Chiriac, Horia, National Institute of Research and Development, Romania  
Chowdhuri, Arijit, University of Delhi, India  
Chung, Wen-Yaw, Chung Yuan Christian University, Taiwan  
Corres, Jesus, Universidad Publica de Navarra, Spain  
Cortes, Camilo A., Universidad Nacional de Colombia, Colombia  
Courtois, Christian, Université de Valenciennes, France  
Cusano, Andrea, University of Sannio, Italy  
D'Amico, Arnaldo, Università di Tor Vergata, Italy  
De Stefano, Luca, Institute for Microelectronics and Microsystem, Italy  
Deshmukh, Kiran, Shri Shivaji Mahavidyalaya, Barshi, India  
Dickert, Franz L., Vienna University, Austria  
Diegue, Angel, University of Barcelona, Spain  
Dighavkar, C. G., M.G. Vidyamandir's L. V.H. College, India  
Dimitropoulos, Panos, University of Thessaly, Greece  
Ding, Jianning, Jiangsu Polytechnic University, China  
Djordjevic, Alexander, City University of Hong Kong, Hong Kong  
Donato, Nicola, University of Messina, Italy  
Donato, Patricio, Universidad de Mar del Plata, Argentina  
Dong, Feng, Tianjin University, China  
Drljaca, Predrag, Intersema Sensoric SA, Switzerland  
Dubey, Venketesh, Bournemouth University, UK  
Enderle, Stefan, Univ. of Ulm and KTB Mechatronics GmbH, Germany  
Erdem, Gursan K. Arzum, Ege University, Turkey  
Erkmen, Aydan M., Middle East Technical University, Turkey  
Estelle, Patrice, Insa Rennes, France  
Estrada, Horacio, University of North Carolina, USA  
Faiz, Adil, INSA Lyon, France  
Fericean, Sorin, Balluff GmbH, Germany  
Fernandes, Joana M., University of Porto, Portugal  
Francioso, Luca, CNR-IMM Institute for Microelectronics and Microsystems, Italy  
Francis, Laurent, University Catholique de Louvain, Belgium  
Fu, Weiling, South-Western Hospital, Chongqing, China  
Gaura, Elena, Coventry University, UK  
Geng, Yanfeng, China University of Petroleum, China  
Gole, James, Georgia Institute of Technology, USA  
Gong, Hao, National University of Singapore, Singapore  
Gonzalez de la Rosa, Juan Jose, University of Cadiz, Spain  
Granel, Annette, Goteborg University, Sweden  
Graff, Mason, The University of Texas at Arlington, USA  
Guan, Shan, Eastman Kodak, USA  
Guillet, Bruno, University of Caen, France  
Guo, Zhen, New Jersey Institute of Technology, USA  
Gupta, Narendra Kumar, Napier University, UK  
Hadjiloucas, Sillas, The University of Reading, UK  
Haider, Mohammad R., Sonoma State University, USA  
Hashsham, Syed, Michigan State University, USA  
Hasni, Abdelhafid, Bechar University, Algeria  
Hernandez, Alvaro, University of Alcala, Spain  
Hernandez, Wilmar, Universidad Politecnica de Madrid, Spain  
Homentcovschi, Dorel, SUNY Binghamton, USA  
Horstman, Tom, U.S. Automation Group, LLC, USA  
Hsiai, Tzung (John), University of Southern California, USA  
Huang, Jeng-Sheng, Chung Yuan Christian University, Taiwan  
Huang, Star, National Tsing Hua University, Taiwan  
Huang, Wei, PSG Design Center, USA  
Hui, David, University of New Orleans, USA  
Jaffrezic-Renault, Nicole, Ecole Centrale de Lyon, France  
James, Daniel, Griffith University, Australia  
Janting, Jakob, DELTA Danish Electronics, Denmark  
Jiang, Liudi, University of Southampton, UK  
Jiang, Wei, University of Virginia, USA  
Jiao, Zheng, Shanghai University, China  
John, Joachim, IMEC, Belgium  
Kalach, Andrew, Voronezh Institute of Ministry of Interior, Russia  
Kang, Moonho, Sunmoon University, Korea South  
Kaniusas, Eugenijus, Vienna University of Technology, Austria  
Katake, Anup, Texas A&M University, USA  
Kausel, Wilfried, University of Music, Vienna, Austria  
Kavasoglu, Nese, Mugla University, Turkey  
Ke, Cathy, Tyndall National Institute, Ireland  
Khelfaoui, Rachid, Université de Bechar, Algeria  
Khan, Asif, Aligarh Muslim University, Aligarh, India  
Kim, Min Young, Kyungpook National University, Korea South  
Ko, Sang Choon, Electronics. and Telecom. Research Inst., Korea South  
Kotulski, Malgorzata, Wroclaw University of Technology, Poland  
Kockar, Hakan, Balikesir University, Turkey  
Kong, Ing, RMIT University, Australia  
Kratz, Henrik, Uppsala University, Sweden

**Krishnamoorthy, Ganesh**, University of Texas at Austin, USA  
**Kumar, Arun**, University of Delaware, Newark, USA  
**Kumar, Subodh**, National Physical Laboratory, India  
**Kung, Chih-Hsien**, Chang-Jung Christian University, Taiwan  
**Lacnjevac, Caslav**, University of Belgrade, Serbia  
**Lay-Ekuakille, Aime**, University of Lecce, Italy  
**Lee, Jang Myung**, Pusan National University, Korea South  
**Lee, Jun Su**, Amkor Technology, Inc. South Korea  
**Lei, Hua**, National Starch and Chemical Company, USA  
**Li, Fengyuan (Thomas)**, Purdue University, USA  
**Li, Genxi**, Nanjing University, China  
**Li, Hui**, Shanghai Jiaotong University, China  
**Li, Sihua**, Agiltron, Inc., USA  
**Li, Xian-Fang**, Central South University, China  
**Li, Yuefa**, Wayne State University, USA  
**Liang, Yuanchang**, University of Washington, USA  
**Liawruangrath, Saisunee**, Chiang Mai University, Thailand  
**Liew, Kim Meow**, City University of Hong Kong, Hong Kong  
**Lin, Hermann**, National Kaohsiung University, Taiwan  
**Lin, Paul**, Cleveland State University, USA  
**Linderholm, Pontus**, EPFL - Microsystems Laboratory, Switzerland  
**Liu, Aihua**, University of Oklahoma, USA  
**Liu Changgeng**, Louisiana State University, USA  
**Liu, Cheng-Hsien**, National Tsing Hua University, Taiwan  
**Liu, Songqin**, Southeast University, China  
**Lodeiro, Carlos**, University of Vigo, Spain  
**Lorenzo, Maria Encarnacio**, Universidad Autonoma de Madrid, Spain  
**Lukaszewicz, Jerzy Pawel**, Nicholas Copernicus University, Poland  
**Ma, Zhanfang**, Northeast Normal University, China  
**Majstorovic, Vidosav**, University of Belgrade, Serbia  
**Malyshev, V.V.**, National Research Centre 'Kurchatov Institute', Russia  
**Marquez, Alfredo**, Centro de Investigacion en Materiales Avanzados, Mexico  
**Matay, Ladislav**, Slovak Academy of Sciences, Slovakia  
**Mathur, Prafull**, National Physical Laboratory, India  
**Maurya, D.K.**, Institute of Materials Research and Engineering, Singapore  
**Mekid, Samir**, University of Manchester, UK  
**Melnyk, Ivan**, Photon Control Inc., Canada  
**Mendes, Paulo**, University of Minho, Portugal  
**Mennell, Julie**, Northumbria University, UK  
**Mi, Bin**, Boston Scientific Corporation, USA  
**Minas, Graca**, University of Minho, Portugal  
**Mishra, Vivekanand**, National Institute of Technology, India  
**Moghavvemi, Mahmoud**, University of Malaya, Malaysia  
**Mohammadi, Mohammad-Reza**, University of Cambridge, UK  
**Molina Flores, Esteban**, Benemérita Universidad Autónoma de Puebla, Mexico  
**Moradi, Majid**, University of Kerman, Iran  
**Morello, Rosario**, University "Mediterranea" of Reggio Calabria, Italy  
**Mounir, Ben Ali**, University of Sousse, Tunisia  
**Mrad, Nezhil**, Defence R&D, Canada  
**Mulla, Imtiaz Sirajuddin**, National Chemical Laboratory, Pune, India  
**Nabok, Aleksey**, Sheffield Hallam University, UK  
**Neelamegam, Periasamy**, Sastra Deemed University, India  
**Neshkova, Milka**, Bulgarian Academy of Sciences, Bulgaria  
**Oberhammer, Joachim**, Royal Institute of Technology, Sweden  
**Ould Lahoucine, Cherif**, University of Guelma, Algeria  
**Pamidighanta, Sayanu**, Bharat Electronics Limited (BEL), India  
**Pan, Jisheng**, Institute of Materials Research & Engineering, Singapore  
**Park, Joon-Shik**, Korea Electronics Technology Institute, Korea South  
**Passaro, Vittorio M. N.**, Politecnico di Bari, Italy  
**Penza, Michele**, ENEA C.R., Italy  
**Pereira, Jose Miguel**, Instituto Politecnico de Seteбал, Portugal  
**Petsev, Dimiter**, University of New Mexico, USA  
**Pogacnik, Lea**, University of Ljubljana, Slovenia  
**Post, Michael**, National Research Council, Canada  
**Prance, Robert**, University of Sussex, UK  
**Prasad, Ambika**, Gulbarga University, India  
**Prateepasen, Asa**, Kingmoungut's University of Technology, Thailand  
**Pugno, Nicola M.**, Politecnico di Torino, Italy  
**Pullini, Daniele**, Centro Ricerche FIAT, Italy  
**Pumera, Martin**, National Institute for Materials Science, Japan  
**Radhakrishnan, S.**, National Chemical Laboratory, Pune, India  
**Rajanna, K.**, Indian Institute of Science, India  
**Ramadan, Qasem**, Institute of Microelectronics, Singapore  
**Rao, Basuthkar**, Tata Inst. of Fundamental Research, India  
**Raoof, Kosai**, Joseph Fourier University of Grenoble, France  
**Rastogi Shiva, K.**, University of Idaho, USA  
**Reig, Candid**, University of Valencia, Spain  
**Restivo, Maria Teresa**, University of Porto, Portugal  
**Robert, Michel**, University Henri Poincare, France  
**Rezazadeh, Ghader**, Urmia University, Iran  
**Royo, Santiago**, Universitat Politecnica de Catalunya, Spain  
**Rodriguez, Angel**, Universidad Politecnica de Cataluna, Spain  
**Rothberg, Steve**, Loughborough University, UK  
**Sadana, Ajit**, University of Mississippi, USA  
**Sadeghian Marnani, Hamed**, TU Delft, The Netherlands  
**Sapozhnikova, Ksenia**, D.I.Mendeleyev Institute for Metrology, Russia  
**Sandacci, Serghei**, Sensor Technology Ltd., UK  
**Saxena, Vibha**, Bbhba Atomic Research Centre, Mumbai, India  
**Schneider, John K.**, Ultra-Scan Corporation, USA  
**Sengupta, Deepak**, Advance Bio-Photonics, India  
**Seif, Selemeni**, Alabama A & M University, USA  
**Seifter, Achim**, Los Alamos National Laboratory, USA  
**Shah, Kriyang**, La Trobe University, Australia  
**Sankarraj, Anand**, Detector Electronics Corp., USA  
**Silva Girao, Pedro**, Technical University of Lisbon, Portugal  
**Singh, V. R.**, National Physical Laboratory, India  
**Slomovitz, Daniel**, UTE, Uruguay  
**Smith, Martin**, Open University, UK  
**Soleimanpour, Amir Masoud**, University of Toledo, USA  
**Soleymanpour, Ahmad**, University of Toledo, USA  
**Somani, Prakash R.**, Centre for Materials for Electronics Technol., India  
**Sridharan, M.**, Sastra University, India  
**Srinivas, Talabattula**, Indian Institute of Science, Bangalore, India  
**Srivastava, Arvind K.**, NanoSonix Inc., USA  
**Stefan-van Staden, Raluca-Ioana**, University of Pretoria, South Africa  
**Stefanescu, Dan Mihai**, Romanian Measurement Society, Romania  
**Sumriddetchka, Sarun**, National Electronics and Comp. Technol. Center, Thailand  
**Sun, Chengliang**, Polytechnic University, Hong-Kong  
**Sun, Dongming**, Jilin University, China  
**Sun, Junhua**, Beijing University of Aeronautics and Astronautics, China  
**Sun, Zhiqiang**, Central South University, China  
**Suri, C. Raman**, Institute of Microbial Technology, India  
**Sysoev, Victor**, Saratov State Technical University, Russia  
**Szewczyk, Roman**, Industr. Research Inst. for Automation and Measurement, Poland  
**Tan, Ooi Kiang**, Nanyang Technological University, Singapore  
**Tang, Dianping**, Southwest University, China  
**Tang, Jaw-Luen**, National Chung Cheng University, Taiwan  
**Teker, Kasif**, Frostburg State University, USA  
**Thirunavukkarasu, I.**, Manipal University Karnataka, India  
**Thumbavanam Pad, Kartik**, Carnegie Mellon University, USA  
**Tian, Gui Yun**, University of Newcastle, UK  
**Tsiantos, Vassilios**, Technological Educational Institute of Kaval, Greece  
**Tsigara, Anna**, National Hellenic Research Foundation, Greece  
**Twomey, Karen**, University College Cork, Ireland  
**Valente, Antonio**, University, Vila Real, - U.T.A.D., Portugal  
**Vanga, Raghav Rao**, Summit Technology Services, Inc., USA  
**Vaseashta, Ashok**, Marshall University, USA  
**Vazquez, Carmen**, Carlos III University in Madrid, Spain  
**Vieira, Manuela**, Instituto Superior de Engenharia de Lisboa, Portugal  
**Vigna, Benedetto**, STMicroelectronics, Italy  
**Vrba, Radimir**, Brno University of Technology, Czech Republic  
**Wandelt, Barbara**, Technical University of Lodz, Poland  
**Wang, Jiangping**, Xi'an Shiyong University, China  
**Wang, Kedong**, Beihang University, China  
**Wang, Liang**, Pacific Northwest National Laboratory, USA  
**Wang, Mi**, University of Leeds, UK  
**Wang, Shinn-Fwu**, Ching Yun University, Taiwan  
**Wang, Wei-Chih**, University of Washington, USA  
**Wang, Wensheng**, University of Pennsylvania, USA  
**Watson, Steven**, Center for NanoSpace Technologies Inc., USA  
**Weiping, Yan**, Dalian University of Technology, China  
**Wells, Stephen**, Southern Company Services, USA  
**Wolkenberg, Andrzej**, Institute of Electron Technology, Poland  
**Woods, R. Clive**, Louisiana State University, USA  
**Wu, DerHo**, National Pingtung Univ. of Science and Technology, Taiwan  
**Wu, Zhaoyang**, Hunan University, China  
**Xiu Tao, Ge**, Chuzhou University, China  
**Xu, Lisheng**, The Chinese University of Hong Kong, Hong Kong  
**Xu, Sen**, Drexel University, USA  
**Xu, Tao**, University of California, Irvine, USA  
**Yang, Dongfang**, National Research Council, Canada  
**Yang, Shuang-Hua**, Loughborough University, UK  
**Yang, Wuqiang**, The University of Manchester, UK  
**Yang, Xiaoling**, University of Georgia, Athens, GA, USA  
**Yaping Dan**, Harvard University, USA  
**Ymeti, Aurel**, University of Twente, Netherland  
**Yong Zhao**, Northeastern University, China  
**Yu, Haihu**, Wuhan University of Technology, China  
**Yuan, Yong**, Massey University, New Zealand  
**Yufera Garcia, Alberto**, Seville University, Spain  
**Zakaria, Zulkarnay**, University Malaysia Perlis, Malaysia  
**Zagnoni, Michele**, University of Southampton, UK  
**Zamani, Cyrus**, Universitat de Barcelona, Spain  
**Zeni, Luigi**, Second University of Naples, Italy  
**Zhang, Minglong**, Shanghai University, China  
**Zhang, Quintao**, University of California at Berkeley, USA  
**Zhang, Weiping**, Shanghai Jiao Tong University, China  
**Zhang, Wenming**, Shanghai Jiao Tong University, China  
**Zhang, Xueji**, World Precision Instruments, Inc., USA  
**Zhong, Haoxiang**, Henan Normal University, China  
**Zhu, Qing**, Fujifilm Dimatix, Inc., USA  
**Zorzano, Luis**, Universidad de La Rioja, Spain  
**Zourob, Mohammed**, University of Cambridge, UK

# Contents

Volume 16  
Special Issue  
November 2012

[www.sensorsportal.com](http://www.sensorsportal.com)

ISSN 1726-5479

## Research Articles

### Foreword

*Gongfa Li, Tinggui Chen, Hegen Xiong*..... 1

### Research of a Novel Attitude Regulating System of Autonomous Underwater Glider

*Rong Liu, Jie Yu* ..... 1

### Study on the Vibration of the 1700 Four Rollers Rolling Mill

*Zehao Wu, Gongfa Li, Po Gao, Yuan He, Dawei Tan*..... 11

### The Design of Wireless Sensor Application System Based on Internet of Things

*Zhang Ye, Zhang Feng, You Fei* ..... 18

### Design and Simulation of the Air Compressor Control System

*Yuan He, Gongfa Li, Po Gao, Zehao WU and Cunyuan Li*..... 27

### Precise Time Synchronization Technology for Distributed Automated Test System

*Yan Xu, Ming Li, and Jiangtao Dong*..... 35

### FEM-based Simulation of Stress Distribution in U71Mn Heavy Rail during Quenching

*Siqiang Xu, Jianyi Kong, Gongfa Li, Jintang Yang, Hegen Xiong and Guozhang Jiang* ..... 43

### LTS: An Improved Self-Adaptive Data Replication Strategy for File Sharing in Grid

*Liang Hu, Jia Zhao, Xiaodong Fu, Lin Lin, XJianfeng Chu* ..... 52

### Influence of Expansion Joint of Bottom Lining in Ladle Composite Construction Body on Thermal Stress

*Guozhang Jiang, Gongfa Li, Jianyi Kong, Liangxi Xie and Siqiang Xu*..... 61

### Numerical Simulation of the Gap Flow Field for CEDMMG Compound Machining Engineering Ceramics

*Renjie Ji, Yonghong Liu, Chao Zheng, Fei Wang, Yanzhen Zhang, Yang Shen, Baoping Cai*..... 68

### Coke Oven Heating Model of Fuzzy Intelligent Control System

*Guozhang Jiang, Gongfa Li, Jianyi Kong and Liangxi Xie* ..... 75

### Three-Dimensional Model and Test Analysis of the 60t Converter

*Po Gao, Gongfa Li, Zehao Wu, Yuan He, Ke Zhang* ..... 84

### A Multi-pipe and Multi-address Switching Wireless Network for Distributed Seismic Data Acquisition System

*Li Huailiang, Tuo Xianguo, Zhu Lili*..... 92

### Remote Monitoring and Diagnosis System of Rolling Mill Transmission System

*Gongfa Li, Yuesheng Gu, Zehao Wu, Han Xiao, Guozhang Jiang, Jianyi Kong, Liangxi Xie and Siqiang Xu* ..... 101



|                                                                                                                                                                                                                  |     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| <b>Study on Frequency Division Technique of Photoelectric Encoder</b><br><i>Shi-xiong Zhang .....</i>                                                                                                            | 108 |
| <b>Job-shop Scheduling Problem Based on Particle Swarm Optimization Algorithm</b><br><i>Ying Sun and Hegen Xiong .....</i>                                                                                       | 116 |
| <b>Wireless Sensor Network Data Fusion Algorithm Based on Neural Network in the Area of Agriculture</b><br><i>Yi Zhou, Gelian Song, Maohua Wang.....</i>                                                         | 128 |
| <b>Optimal Design of Gear Based on Quantum Genetic Algorithm</b><br><i>Ying Sun and He-gen Xiong .....</i>                                                                                                       | 137 |
| <b>Independent Axiom-based Robust Design for Nonlinear System</b><br><i>Xianfu Cheng.....</i>                                                                                                                    | 144 |
| <b>Development of a New Kind of Multihole Cylindrical Electrode Used for Electrical Discharge Milling</b><br><i>Fei Wang, Yonghong liu, Renjie Ji, Yanzhen Zhang, Zemin Tang, Xiangzhen Han.....</i>             | 152 |
| <b>Energy Efficiency Evaluation of Iron and Steel Enterprise</b><br><i>Guozhang Jiang, Gongfa Li, Jianyi Kong and Liangxi Xie .....</i>                                                                          | 161 |
| <b>Classification Model of Traffic Emergency Response to Urban Emergency</b><br><i>Yaqin He, Jie Li .....</i>                                                                                                    | 169 |
| <b>Modeling the Machining Parameters in End Electric Discharge Milling of Silicon Carbide Ceramic</b><br><i>Renjie Ji, Yonghong Liu, Yanzhen Zhang, Fei Wang, Chao Zheng, Yang Shen.....</i>                     | 179 |
| <b>Testability Analysis of Inertial Measure Unit Based on Multi-signal Model</b><br><i>Xing He, Hongli Wang, Jinghui Lu.....</i>                                                                                 | 188 |
| <b>Vibration Model of Pipe Conveying Fluid Considered Fluid Structure Interaction</b><br><i>Gongfa Li, Yuesheng Gu, Zehao Wu, Han Xiao, Jianyi Kong, Guozhang Jiang, Liangxi Xie, Li Hu and Siqiang Xu .....</i> | 197 |
| <b>Optimization SVM Algorithm and it's Application in Agricultural Science and Technology Project Classification</b><br><i>Hui Feng Yan, Wei Feng Wang, Qin Mao, Ming Liang Zhou .....</i>                       | 203 |
| <b>Accuracy of Experimental Platform of Controlled Five-bar Linkages</b><br><i>Li Pan.....</i>                                                                                                                   | 210 |
| <b>Analysis on Sliding Velocity of Cycloid Gear Pair during Meshing</b><br><i>Shuyan. Wang, Guizhong Tian, Xujun Jiang.....</i>                                                                                  | 218 |
| <b>Intelligent Diagnosis of Coke Oven Heating Production</b><br><i>Gongfa Li, Yuesheng Gu, Jianyi Kong, Guozhang Jiang and Liangxi Xie .....</i>                                                                 | 226 |
| <b>Adaptive Fuzzy Control of Aircraft ABS Based on Runway Identification</b><br><i>Hua-wei Wu, Te-fang Chen, Wei-ming Huang.....</i>                                                                             | 233 |
| <b>The Total Factor Productivity Growth of the Municipal Water Industry in China</b><br><i>Wang Fen .....</i>                                                                                                    | 243 |
| <b>Research on Attainable Moment Subset of Singular Over-actuated System</b><br><i>Shi Jingping, Qu Xiaobo.....</i>                                                                                              | 252 |
| <b>Finite Element Analysis of Vane Seals</b><br><i>Guozhang Jiang, Li Zhao, Jianyi Kong, Gongfa Li, Liangxi Xie .....</i>                                                                                        | 261 |
|                                                                                                                                                                                                                  | 269 |

**Application of Multi-factor Fuzzy Comprehensive Evaluation in Stability of Surrounding Rock of Underground Engineering**

*Jinglong Li, Jiachun Li, Shuchen Li*.....

**Jackknife Control on Tractor Semi-trailer during High Speed Curve Driving**

*Shuwen Zhou and Siqi Zhang* ..... 277

**Simulation and Experiment Research on Deforming Force of Slab Cold Roll-beating**

*Mingshun Yang, Yan Li, Jianming Zheng, Qilong Yuan*..... 285

**Research on Organizational Culture and Resources Integration Model Based on MICK-4FI**

*Yan Zhan, Jiansha Lu and Shiyun Li*..... 295

Authors are encouraged to submit article in MS Word (doc) and Acrobat (pdf) formats by e-mail: [editor@sensorsportal.com](mailto:editor@sensorsportal.com)  
Please visit journal's webpage with preparation instructions: <http://www.sensorsportal.com/HTML/DIGEST/Submission.htm>

International Frequency Sensor Association (IFSA).



## International Frequency Sensor Association Publishing Call for Books Proposals

**Sensors, MEMS, Measuring instrumentation, etc.**



### Benefits and rewards of being an IFSA author:

**1**

#### **Royalties**

Today IFSA offers most high royalty in the world: you will receive 50 % of each book sold in comparison with 8-11 % from other publishers, and get payment on monthly basis compared with other publishers' yearly basis.

**2**

#### **Quick Publication**

IFSA recognizes the value to our customers of timely information, so we produce your book quickly: 2 months publishing schedule compared with other publishers' 5-18-month schedule.

**3**

#### **The Best Targeted Marketing and Promotion**

As a leading online publisher in sensors related fields, IFSA and its Sensors Web Portal has a great expertise and experience to market and promote your book worldwide. An extensive marketing plan will be developed for each new book, including intensive promotions in IFSA's media: journal, magazine, newsletter and online bookstore at Sensors Web Portal.

**4**

#### **Published Format: printable pdf (Acrobat).**

When you publish with IFSA your book will never go out of print and can be delivered to customers in a few minutes.

You are invited kindly to share in the benefits of being an IFSA author and to submit your book proposal or/and a sample chapter for review by e-mail to [editor@sensorsportal.com](mailto:editor@sensorsportal.com). These proposals may include technical references, application engineering handbooks, monographs, guides and textbooks. Also edited survey books, state-of-the art or state-of-the-technology, are of interest to us. For more detail please visit: [http://www.sensorsportal.com/HTML/IFSA\\_Publishing.htm](http://www.sensorsportal.com/HTML/IFSA_Publishing.htm)



The Fourth International Conference on Sensor Device Technologies and Applications

## SENSORDEVICES 2013

25 - 31 August 2013 - Barcelona, Spain

**Tracks:** Sensor devices - Ultrasonic and Piezosensors - Photonics - Infrared - Gas Sensors - Geosensors - Sensor device technologies - Sensors signal conditioning and interfacing circuits - Medical devices and sensors applications - Sensors domain-oriented devices, technologies, and applications - Sensor-based localization and tracking technologies - Sensors and Transducers for Non-Destructive Testing

**Deadline for papers: 30 March 2013**

<http://www.iaria.org/conferences2013/SENSORDEVICES13.html>



The Seventh International Conference on Sensor Technologies and Applications

**Deadline for papers:  
30 March 2013**

## SENSORCOMM 2013

25 - 31 August 2013 - Barcelona, Spain

**Tracks:** Architectures, protocols and algorithms of sensor networks - Energy, management and control of sensor networks - Resource allocation, services, QoS and fault tolerance in sensor networks - Performance, simulation and modelling of sensor networks - Security and monitoring of sensor networks - Sensor circuits and sensor devices - Radio issues in wireless sensor networks - Software, applications and programming of sensor networks - Data allocation and information in sensor networks - Deployments and implementations of sensor networks - Under water sensors and systems - Energy optimization in wireless sensor networks

<http://www.iaria.org/conferences2013/SENSORCOMM13.html>



The Sixth International Conference on Advances in Circuits, Electronics and Micro-electronics

## CENICS 2013

25 - 31 August 2013 - Barcelona, Spain

**Deadline for papers: 30 March 2013**

**Tracks:** Semiconductors and applications - Design, models and languages - Signal processing circuits - Arithmetic computational circuits - Microelectronics - Electronics technologies - Special circuits - Consumer electronics - Application-oriented electronics

<http://www.iaria.org/conferences2013/CENICS13.html>



## The Design of Wireless Sensor Application System Based on Internet of Things

<sup>1</sup> Zhang Ye, <sup>1,2</sup> Zhang Feng, <sup>1</sup> You Fei

<sup>1</sup> School of Information Engineering, Yulin University, 719000, Yulin, China

Tel.: +8613649220169

<sup>2</sup> School of automation, Northwestern Polytechnical University, 710072, Xi'an, China

Tel.: +8613891915616

E-mail: 876371599@qq.com, tfnew21@sina.com

*Received: 11 September 2012 /Accepted: 11 October 2012 /Published: 20 November 2012*

---

**Abstract:** In order to improve agricultural irrigation water use efficiency, reduce cost of agricultural irrigation water, this paper discussed the design of wireless sensor network and Internet technology of farmland automatic irrigation control method. The system hardware, software designed, middleware, and applications such as mobile phone or wireless PDA of Internet of Things of the routing protocol of sensor network nodes were analyzed, and constitute a variety of sensors intelligent network, thus the overall automation system and monitoring levels were enhanced. Final the network in the Internet based on the agricultural plants of farmland water-saving irrigation system integrated approach were analyzed. User use mobile phones or wireless PDA can easily soil moisture content of online monitoring and control to realize the irrigation automation. Application results show that system through the embedded control technology complete intelligent irrigation, the agricultural irrigation water use efficiency was improved, irrigation system automatization is generally low status, can well realize water saving.

Copyright © 2012 IFSA.

**Keywords:** Wireless sensor, Internet of Things, Routing protocol, Localization of nodes, RFID.

---

### 1. Introduction

As new Internet of Things information network, for most types of agricultural materials, agricultural products through the Internet of Things will be fresh growth state, response to environmental changes, storage preservation, distribution and quality and safety of equipment, machinery, people close integration of active behavior, will have an important impact on the agricultural economy [1].



With the development of Internet of Things, its technology has been widely applied to all aspects of agricultural production, water-saving irrigation involves engineering, agriculture, biology, automation, communications, and many other technologies. water-saving irrigation automatic control system based on wireless sensor using the sensor and set the conditions and the receiver communication, control irrigation systems, valves open, close, so as to achieve the purpose of automatic water-saving irrigation. Because of sensor networks with multiple hops routing, information exchange recursion, self-organizing networks and network communication time synchronization characteristics and irrigation area, the number of node cannot restricted, and thus can be flexible increase or decrease round irrigation group. And nodes with soil, plants, weather measurement acquisition device that uses communications gateway Internet functions and GPS techniques combined to form the dynamic management information collection and analysis irrigation technologies, along with crop water information collection and semi-precise control irrigation technique, expert system technology, etc., can construct high efficiency, low power consumption, low investment, multi-function agricultural water-saving irrigation platform [2]. Users can also in a greenhouse, courtyard garden green, the central isolation belt highway, agricultural wells and other areas with irrigated areas, agricultural and ecological water-saving technology, quantification, standardization, modeling, integration, and promote the rapid and water-saving agriculture healthy development.

In the Internet of Things related techniques, domestic currently in wireless sensor network software made corresponding breakthrough on the operating system based on foreign to develop their own middleware software. Such as the Nanjing University of Posts and Telecommunications research center for development of wireless sensor networks based on mobile agent middleware platform for wireless sensor networks, shenglian technology development of wireless sensor network development kits. Domestic research institutions in the theoretical research, such as network protocols for wireless sensor networks, algorithms, architecture, etc., put forward a number of innovative ideas and theories. In this field, Nanjing University of posts and telecommunications, Tsinghua University, Beijing University of Posts and so made some relevant theoretical research results [3].

In other countries, many American universities in the wireless sensor network have carried out a lot of work. Such as the University of California, Los Angeles, CENS (Center for Embedded Networked Sensing) Laboratory, WINS (Wireless Integrated Network Sensors) Laboratory and IRL (Internet Research Lab) and so on [4].

This paper reference some enterprise's actual production processes, from home and abroad to the traceability system related research, through research based on internet of things water-saving irrigation system scheme, the original traceability system based on Web water-saving irrigation processing scheme must be improved and in practical projects application and achieved good effect. Automatic irrigation control system has the following advantages:

- 1) Will give full play to the role of the existing water-saving devices, optimal operation and improve efficiency;
- 2) Through the application of automatic control technology, more water and energy conservation, reduce irrigation costs and improve the quality of irrigation;
- 3) Will irrigate more scientific, to facilitate and improve the management level.

Control the development and promotion of water-saving irrigation technology is the need for agricultural modernization.

## **2. Design of Water-saving Irrigation Automatic Control System**

### **2.1. Wireless Sensor Networks**

Wireless sensor network technology applied to the water system, its core technology is the application of ZigBee networking technology since. ZigBee is a low heterogeneous, low power, low data rate, low capital, high-solid reliability, a large network capacity two-way wireless communications technology [5]. By using the layer, network layer, medium access control layer and physical layer. Based on ZigBee wireless sensor networks system can solve the cable transmission bring cost is exorbitant, cabling complex, maintenance trouble, flexibility and expansibility such a series of problems, which saves the human resources, went to the lavatory again information management, has been used steel temperature monitoring, vegetable shed steelmaking temperature, humidity and soil ph monitoring, gas meter and other fields, it is the realization of the system provides a better solution.

### **2.2. System Architecture Design**

The system uses single chip control center, by wireless sensor node (RFD), wireless router nodes (FFD), wireless gateway (FFD), the monitoring center four local compositions, accepted the ZigBee since network, the monitoring center, wireless gateway between resolution GPRS hold moisture content and control information transfer. Each sensor node resolved temperature and humidity sensors, soil moisture information automatically collected and combined upper and lower limits of humidity at the default analysis, determine what can and cannot have irrigation hour suspension. Each node with a solar battery, the battery voltage is monitored at any time, once the voltage is too low, the node will issue a low voltage alarm signal sent successfully, the node into the sleep pattern until it is fully charged. Which wireless gateway cohesion ZigBee wireless network and GPRS networks, is based on wireless sensor networks of water-saving irrigation control system, as the center of local wireless sensor node maintenance.

Autonomous sensor nodes and routing nodes form a multi-hop network. Monitoring of temperature and humidity sensors distributed in the region, the collected data sent to the nearest wireless routing node, the routing node routing algorithm based on selecting the best route, and establish the appropriate routing list, which list contains the information itself, and the neighbor gateway information. Then data has been sent to remote monitoring center by protocol gateway, convenient for the user to remote monitoring maintenance. The water-saving irrigation automatic control system based on the Internet of Things has been shown in Fig. 1.

### **2.3. System Hardware Design**

Main achievement of the system sensor nodes monitoring soil water content, EC (conductivity) value and the PH value of the monitoring, monitoring of the state of the solenoid valve, solenoid valve to control the state, various monitoring and control of transmission of communication signals and low voltage alarm. Each control unit controls the 1-6 way solenoid valves. Through the sensors to collect to of multi-channel data, after A/D conversion, signal processing, in microprocessor, according to different vegetation needs, identifying water amount, then control signal output, combining central management of A computer instruction, control the solenoid switch, namely can achieve automatic irrigation. Soil moisture sensor used to measure the soil moisture, in order to understand the real irrigation, soil basis, determined irrigation or not and duration, equipped with EC value and PH sensors, may to the inlet and outlet water for EC value and pH value detection, in order to control automatically nutrient rationing. The main block diagram has been shown in Fig. 2.

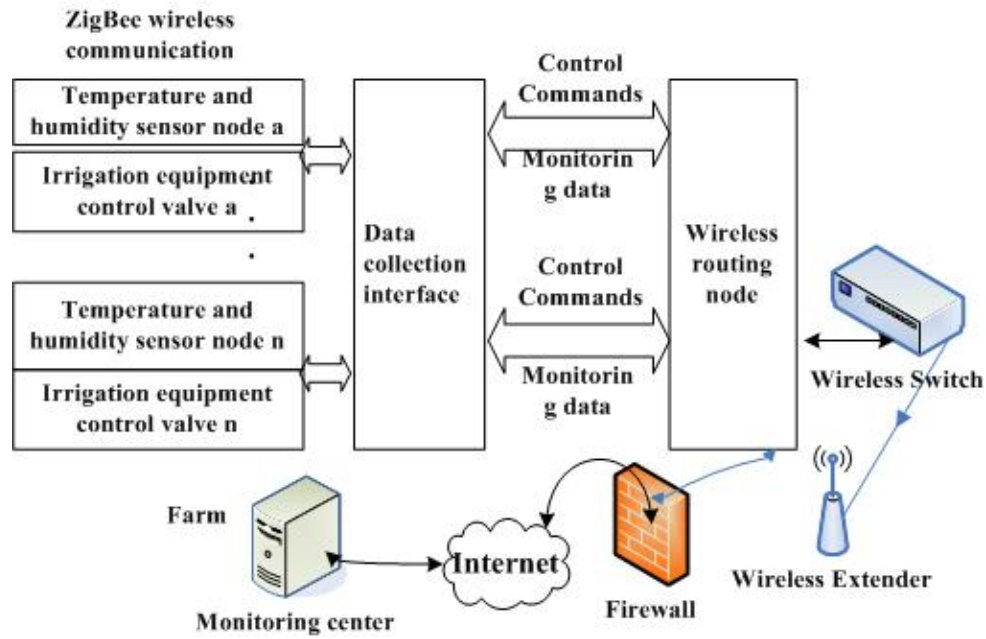


Fig. 1. Wireless sensor system structure.


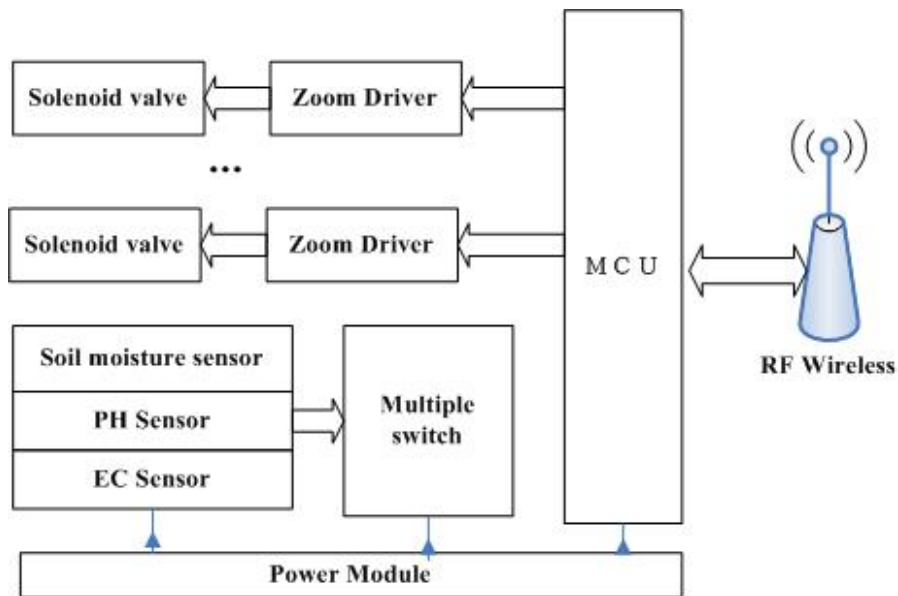


Fig. 2. Sensor nodes hardware control structure.

## 2.4. System Software Design

The system uses Internet environment, the use of B/S model for development. System server operation system chooses Linux, the main technology used for the Java EE and Java programming language, database system used Oracle11g. Real-time data processing system database is the core of the whole. Real-time database as an intermediary link, the data situation in order to realize the scene is reflected in the form of animation on the screen, making the operator's instructions before the computer can quickly reach the scene. The software structure has been shown in Fig. 3.

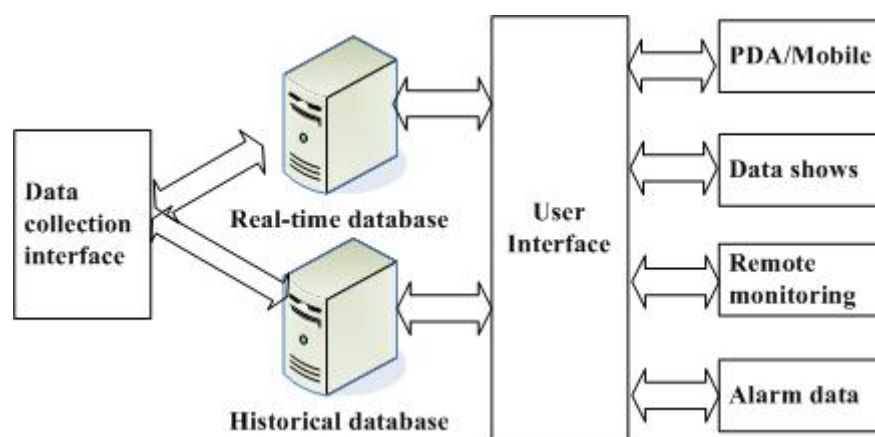

**Fig. 3.** Structure of software.

### **3. Implementation of Water-saving Irrigation Automatic Control System**

#### **3.1. Design of Sensor Data Processing Middleware**

Data acquisition and control function, can pass hardware driver and equipment communication, complete data acquisition and control tasks, sensor middleware function modules should contain the following several function module: Reader interface module, the logical drive mapping module, sensors data filtering module, the business rules, filter modules, equipment management and configuration module, the upper service interface module [6-7]. And, Reader interface for middleware and sensors reader data communications, mainly to have access to sensors data and device management module to issue commands reader. Equipment management configuration module is used to adjust the working status of sensors read-write device, configure the appropriate interface parameters such as Reader, logical reader will be more physical mapping module reader for the reader or multiple antennas into a logical map reader.

Control procedures and parameter Settings by sensor data processing middleware provided in the programming language scripts in writing. Run-time system control program flow chart has been shown in Fig. 4.

#### **3.2. Sensor Network Routing Algorithm**

Routing protocol to solve the data transmission problem, which is the core technology of wireless sensor networks and the key technologies to ensure network performance. Since wireless sensor network node capacity constraints, the traditional IP network routing protocols are generally not suitable for wireless sensor networks [8-9]. Wireless communication network of the traditional focus on wireless communications service quality (Qos) on the [10-11], while the WSN node energy as the limited bandwidth resources are limited, the routing protocol research focus on how to improve energy efficiency and maintenance of load balancing on. In order to meet the unique needs of wireless sensor networks, MIT's Heinzelman, who developed a low-energy adaptive.

Clustering routing protocol should be LEACH, LEACH is the first cluster based on multi-cluster structure of the routing protocol, compared with the traditional protocol, which can better save energy. LEACH's cluster approach through its many levels, after the proposed routing protocol, then a lot of clustering routing protocols (such as TEEN, PEGASIS) are developed on its basis, its results also apply to many other routing protocol. So, the main research and discussion on the LEACH protocol [12].



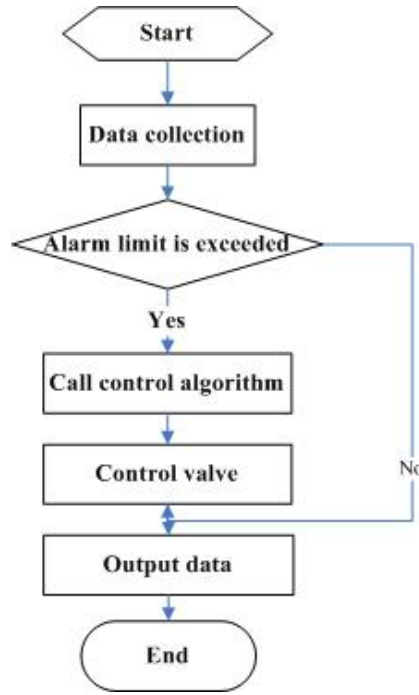


Fig. 4. Control procedure flow chart.

Due to the middle of wireless sensor network by the design of first consideration is energy problem, it is necessary to study channel energy loss model. Different communication characteristics, it will have different energy consumption model. Channel energy model with free-space propagation model and multiple attenuation model two. If the receiving node and the distance between the sending node is less than some critical value, free space model is used; otherwise, the use of multiple attenuation model. Critical value is defined as follows:

$$d_0 = \frac{4\pi\sqrt{ah_r h_t}}{\lambda}, \quad (1)$$

where  $\alpha$  is the path loss exponent;  $h_r$  is the receiver antenna height;  $h_t$  is the height of transmitting antenna;  $\lambda$  is the wavelength of the signal. When the sending node  $k$  bit data to the associated transmission distance  $d$  of the receiving node, by the following formula to calculate energy consumption of transmitting nodes:

$$E_{Tx}(k, d) = E_{Tx-elec}(k) + E_{Tx-amp}(k, d) = \begin{cases} E_{elec} \times k + \varepsilon_{fs} \times k \times d^2, & d < d_0 \\ E_{elec} \times k + \varepsilon_{mp} \times k \times d^4, & d \geq d_0 \end{cases}, \quad (2)$$

where,  $E_{Tx-elec}(k)$  is the emission  $k$  bit data transmitter circuit energy consumption;  $E_{Tx-amp}(k, d)$  is the emission  $k$  bit data transmission distance  $d$  and the energy consumption when the power amplifier.  $E_{elec}$  bit of data for each circuit in the transmitting or receiving the energy consumed by the circuit. Constants  $\varepsilon_{fs}$ , and  $\varepsilon_{mp}$ , and the transmission channel model used are related to a free space transmission of the  $\varepsilon_{fs}$ , multi-path fading transmission of the  $\varepsilon_{mp}$ .

Loss of signal strength and transmission are distances related. When the transmission distance is relatively close, the use of free-space propagation model, path loss exponent of 2, when the transmission distance is relatively far, the use of multiple attenuation model, path loss exponent is 4 [13].

All nodes LEACH self-organization cluster in clusters, by a node as cluster head, all cluster member node sent to cluster head, cluster head of data fusion processing backwardness to base station. Cluster head than cluster nodes consume more energy members. By used a random rotation of cluster head node mechanism to avoid depletion of energy in the LEACH routing protocol.

### 3.2.1 Proportion of Stages Cluster Head

The clusters were established at the time in the first network, to elect the current round of the cluster head node. Specifically, each node in the 0 to 1 to select a random number, if the random number than the predetermined threshold  $T(n)$  is small, then the node for the cluster head in the current round; otherwise, in the current round of the cluster members.  $T(n)$  is set to

$$T(n) = \begin{cases} \frac{p}{1 - p \cdot \left( r \bmod \left( \frac{1}{p} \right) \right)}, & n \in G \\ 0 & \end{cases} \quad (3)$$

where,  $p$  is the desired percentage of cluster head nodes, usually taking the total number  $p$  of nodes around 4 % -5 %;  $r$  is the current number of rounds;  $G$  is in recent not become before  $r \bmod \left( \frac{1}{p} \right)$  wheel cluster head node collection.

### 3.2.2. The Organizational Phase of Clustering

This stage, each node must determine if they should act as the first round of the cluster nodes. Determine the cluster head immediately after the broadcast packet to the network; the information package contains the node's own ID. Each node according to the received signal strength, choose the source node sending the strongest signal as their cluster head node. Once the decision as to which cluster node after the node through the carrier sense multiple access (CSMA, Carrier-Sense Multiple Access) MAC protocol that information to the cluster head, cluster head node notify its members that he would become one of information includes its own ID and the cluster head node ID.

### 3.2.3. The Organizational Stage Cluster Creation Timetable

Cluster head according to oneself the number of cluster nodes in creating a time table, and through broadcast announcement each cluster nodes in the data transfer time. Using time buttress table can make cluster member node data transmission won't collisions and conflicts, and in the data transmission period, node can shut down their wireless device, will it be more energy saving. So far, the stage of establishing a cluster finish began to stabilize the data transmission phase.

### 3.2.4. Stability Phase

In the stable data transmission phase, cluster member in the time of their own to cluster hair send sensor data. Cluster head nodes have been let oneself of the receiver is open, for which can receive from different cluster member of data. When a frame of data has been transfer after the cluster head node of data fusion and compression, the compression process after the signal transmission give base station.

The processes described above are all cluster communication within the cluster to neighboring clusters will inevitably affect the work. In order to reduce interference between clusters, different cluster communication can be used Code Division Multiple Access (CDMA) system. Cluster head node from a group of spreading codes selected code as an extension of the cluster ID, and notify all members of the cluster nodes. So, when the cluster communications, according to the different ID, the other clusters will be filtered out of signal.

#### 4. Performance Tests


In order to verify the improve performance of routing protocols, made by computer simulation of the algorithm. Simulation network model used is:

- 1) Assumes network CPC have 200 sensor node, each node of the initial energy set to 0.20 J.
- 2) Network for the 60 m × 40 m square area, the base station is located in the center of the entire network area.
- 3) Assuming the position of the nodes in the network information is known.

Channel energy loss model parameters shown in Table 1, the network energy consumption, as shown in Fig. 5, shown abscissa denotes said Internetworking a number of rounds, y-coordinate means that the current round of network operation in total energy consumption of energy, the unit is joule.

**Table 1.** Energy loss channel model parameters.

| Parameter entry    | Parameter values            |
|--------------------|-----------------------------|
| $E_{elec}$         | 60nj/ bit                   |
| $\varepsilon_{fs}$ | 100pj/bit/m <sup>2</sup>    |
| $\varepsilon_{mp}$ | 0.0013pj/bit/m <sup>4</sup> |

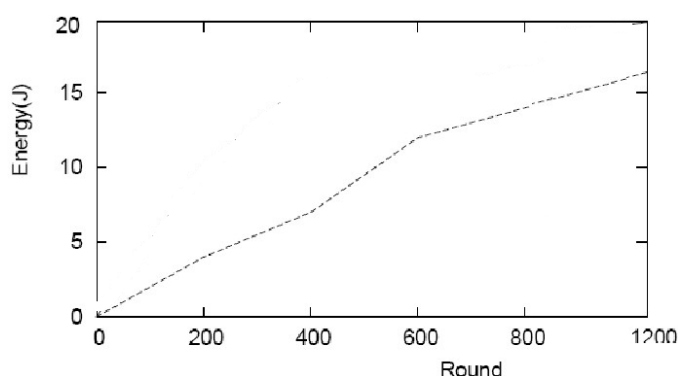

**Fig. 5.** The algorithms test results of energy consumption of sensor network.

#### 5. Conclusions

This paper proposed water-saving irrigation system based on Internet of things, which has a high degree of automation features. The program is currently developing the water-saving irrigation system has been installed in the domestic use of a vegetable business, the future will continue to improve based on user feedback.

## Acknowledgements

This work is partially supported by the Science and Technology Research and Development Program of Shaanxi Province in 2012 #2012K12-03-08, Funding Project for Department of Education of Shaanxi Province in 2012 #12JK0537. Thanks for the help.

## References

- [1]. ZigBee specification: ZigBee document 053474r06, Version 1.0, *ZigBee Alliance*, 2010.
- [2]. D. Brock, The Physical Markup Language (PML)-A Universal Language for Physical Objects, Technical Report MIT, *MIT Auto-ID Center*, 2009.
- [3]. S. Sarma, D. Brock, K. Ashton, The Networked Physical World, White paper MIT, *MIT Auto-ID Center*, 2011.
- [4]. B. Warneke, M. Last, B. Liebowitz, and K. Pister, Smart Dust: Communicating with a Cubic-millimeter Computer, *IEEE Computer Magazine*, 34, 1, 2009, pp. 44-51.
- [5]. I. F. Akyildig, Weilian Su, Yogesh Sankarasubramaniam, Erdal Cayircy, A Survey on Sensor Networks, *IEEE Communications Magazine*, 8, 2002, pp. 102-114.
- [6]. M. Kuorilehto, M. Hannikainen, T. D. Hamalainen. A Survey of Application Distribution in Wireless Sensor Networks, *Eurasip Journal on Wireless Communications and Networking*, 2005, 5, pp. 774-788.
- [7]. S. Meguerdichian, F. Koushanfar, M. Potkonjak, M. B. Srivastava, Coverage Problems in Wireless Ad-hoc Sensor Networks, in *Proceedings of the IEEE INFOCOM*, 3, 2011, pp. 1380-1387.
- [8]. J. Hightower, G. Boriello, Location Systems for Ubiquitous Computing, *Computer*, 34, 8, 2001, pp. 57-66.
- [9]. Y. Shang, W. Ruml, Improved MDS-based Localization, in *Proceedings of the IEEE INFOCOM*, 2004, pp. 2640-2651.
- [10]. D. Niculescu, B. Nath. Ad hoc Positioning System (APS) using AOA, in *Proceedings of the IEEE INFOCOM*, San Francisco, 3, 2003, pp. 1734-1743.
- [11]. X. Li, Performance study of RSS-based Location Estimation Techniques for Wireless Networks, in *Proceedings of the IEEE Military Communication, Conference*, 2 October 2005, pp. 1064-1068.
- [12]. Catovic, Z. Sahinoglu, The Cramer-Rao Bounds of hybrid TOA/RSS and TDOA/RSS Location Estimation Schemes, *IEEE Communication Letter*, 8, 10, 2009, pp. 626-628.
- [13]. Silverstein C., Marais H., Henzinger M., Moricz M., Analysis of a very large Web search engine query log. *SIGIR Forum*, 33, 1, 2008, pp. 6-12.

---

2012 Copyright ©, International Frequency Sensor Association (IFSA). All rights reserved.  
(<http://www.sensorsportal.com>)




**Promoted by IFSA**

# Status of the MEMS Industry Report up to 2017

Report includes MEMS device markets, key players strategies, key industry changes and MEMS financial analysis. It also includes major MEMS manufacturing evolutions as well as an update on the "emerging" MEMS device markets.

**Order online:**  
[http://www.sensorsportal.com/HTML/Status\\_of\\_MEMS\\_Industry.htm](http://www.sensorsportal.com/HTML/Status_of_MEMS_Industry.htm)



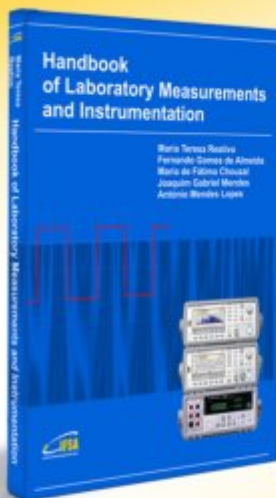

## Handbook of Laboratory Measurements and Instrumentation

Maria Teresa Restivo  
Fernando Gomes de Almeida  
Maria de Fátima Chouzal  
Joaquim Gabriel Mendes  
António Mendes Lopes

The Handbook of Laboratory Measurements and Instrumentation presents experimental and laboratory activities with an approach as close as possible to reality, even offering remote access to experiments, providing to the reader an excellent tool for learning laboratory techniques and methodologies. Book includes dozens videos, animations and simulations following each of chapters. It makes the title very valued and different from existing books on measurements and instrumentation.



International Frequency Sensor Association Publishing

Order online:

[http://www.sensorsportal.com/HTML/BOOKSTORE/Handbook\\_of\\_Measurements.htm](http://www.sensorsportal.com/HTML/BOOKSTORE/Handbook_of_Measurements.htm)



International Frequency Sensor Association (IFSA) Publishing

## Digital Sensors and Sensor Systems: Practical Design

Sergey Y. Yurish



The goal of this book is to help the practitioners achieve the best metrological and technical performances of digital sensors and sensor systems at low cost, and significantly to reduce time-to-market. It should be also useful for students, lectures and professors to provide a solid background of the novel concepts and design approach.

Book features include:

- Each of chapter can be used independently and contains its own detailed list of references
- Easy-to-repeat experiments
- Practical orientation
- Dozens examples of various complete sensors and sensor systems for physical and chemical, electrical and non-electrical values
- Detailed description of technology driven and coming alternative to the ADC a frequency (time)-to-digital conversion

Formats: printable pdf (Acrobat)  
and print (hardcover), 419 pages

ISBN: 978-84-616-0652-8,  
e-ISBN: 978-84-615-6957-1

*Digital Sensors and Sensor Systems: Practical Design* will greatly benefit undergraduate and at PhD students, engineers, scientists and researchers in both industry and academia. It is especially suited as a reference guide for practitioners, working for Original Equipment Manufacturers (OEM) electronics market (electronics/hardware), sensor industry, and using commercial-off-the-shelf components

[http://sensorsportal.com/HTML/BOOKSTORE/Digital\\_Sensors.htm](http://sensorsportal.com/HTML/BOOKSTORE/Digital_Sensors.htm)

## Guide for Contributors

---

### Aims and Scope

*Sensors & Transducers Journal* (ISSN 1726-5479) provides an advanced forum for the science and technology of physical, chemical sensors and biosensors. It publishes state-of-the-art reviews, regular research and application specific papers, short notes, letters to Editor and sensors related books reviews as well as academic, practical and commercial information of interest to its readership. Because of it is a peer reviewed international journal, papers rapidly published in *Sensors & Transducers Journal* will receive a very high publicity. The journal is published monthly as twelve issues per year by International Frequency Sensor Association (IFSA). In addition, some special sponsored and conference issues published annually. *Sensors & Transducers Journal* is indexed and abstracted very quickly by Chemical Abstracts, IndexCopernicus Journals Master List, Open J-Gate, Google Scholar, etc. Since 2011 the journal is covered and indexed (including a Scopus, Embase, Engineering Village and Reaxys) in Elsevier products.

### Topics Covered

Contributions are invited on all aspects of research, development and application of the science and technology of sensors, transducers and sensor instrumentations. Topics include, but are not restricted to:

- Physical, chemical and biosensors;
- Digital, frequency, period, duty-cycle, time interval, PWM, pulse number output sensors and transducers;
- Theory, principles, effects, design, standardization and modeling;
- Smart sensors and systems;
- Sensor instrumentation;
- Virtual instruments;
- Sensors interfaces, buses and networks;
- Signal processing;
- Frequency (period, duty-cycle)-to-digital converters, ADC;
- Technologies and materials;
- Nanosensors;
- Microsystems;
- Applications.

### Submission of papers


Articles should be written in English. Authors are invited to submit by e-mail [editor@sensorsportal.com](mailto:editor@sensorsportal.com) 8-14 pages article (including abstract, illustrations (color or grayscale), photos and references) in both: MS Word (doc) and Acrobat (pdf) formats. Detailed preparation instructions, paper example and template of manuscript are available from the journal's webpage: <http://www.sensorsportal.com/HTML/DIGEST/Submission.htm> Authors must follow the instructions strictly when submitting their manuscripts.

### Advertising Information

Advertising orders and enquires may be sent to [sales@sensorsportal.com](mailto:sales@sensorsportal.com) Please download also our media kit: [http://www.sensorsportal.com/DOWNLOADS/Media\\_Kit\\_2012.pdf](http://www.sensorsportal.com/DOWNLOADS/Media_Kit_2012.pdf)

**ADVANCES IN SENSORS:  
REVIEWS****1****Sergey Y. Yurish**  
Editor

# **Modern Sensors, Transducers and Sensor Networks**

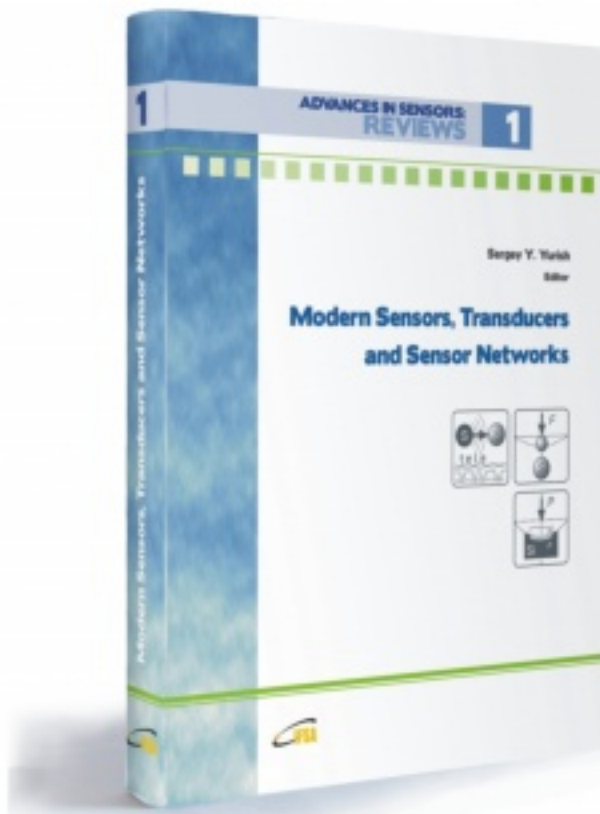

*Modern Sensors, Transducers and Sensor Networks* is the first book from the Advances in Sensors: Reviews book Series contains dozen collected sensor related state-of-the-art reviews written by 31 internationally recognized experts from academia and industry.

Built upon the series Advances in Sensors: Reviews - a premier sensor review source, the *Modern Sensors, Transducers and Sensor Networks* presents an overview of highlights in the field. Coverage includes current developments in sensing nanomaterials, technologies, MEMS sensor design, synthesis, modeling and applications of sensors, transducers and wireless sensor networks, signal detection and advanced signal processing, as well as new sensing principles and methods of measurements.

*Modern Sensors, Transducers and Sensor Networks* is intended for anyone who wants to cover a comprehensive range of topics in the field of sensors paradigms and developments. It provides guidance for technology solution developers from academia, research institutions, and industry, providing them with a broader perspective of sensor science and industry.

Order online:

[http://sensorsportal.com/HTML/BOOKSTORE/Advance\\_in\\_Sensors.htm](http://sensorsportal.com/HTML/BOOKSTORE/Advance_in_Sensors.htm)



## **www.sensorsportal.com**